Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

LCoS - 2004
EMU8 AA - Chassis

Models:
44PL9522/17, 44PL9523/17, 44PL9523/99
55PL9524/37, 55PL9774/37
62PL9524/37, 62PL9774/37

GENERAL INFORMATION

DISASSEMBLY SECTION

ADJUSTMENT SECTION

MECHANICAL DIAGRAMS

WIRING DIAGRAMS

SCHEMATIC DIAGRAMS

CIRCUIT BOARD LAYOUTS

OSCILLOSCOPE WAVEFORMS

44PL952X PARTS LIST

55PL9524 PARTS LIST

55PL9774 PARTS LIST

62PL9524 PARTS LIST

62PL9774 PARTS LIST

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

GENERAL INFORMATION

Return to Index

Manual 7665

Cineos, LCoS - 2004

Chassis: EMU8 AA

Contents of this chapter:

1. General Appearance.
2. Remote Transmitter Appearance.
3. Introduction.
4. Set Operation.
5. Maintanence.
6. Reflective LCD Introduction.

General Appearance

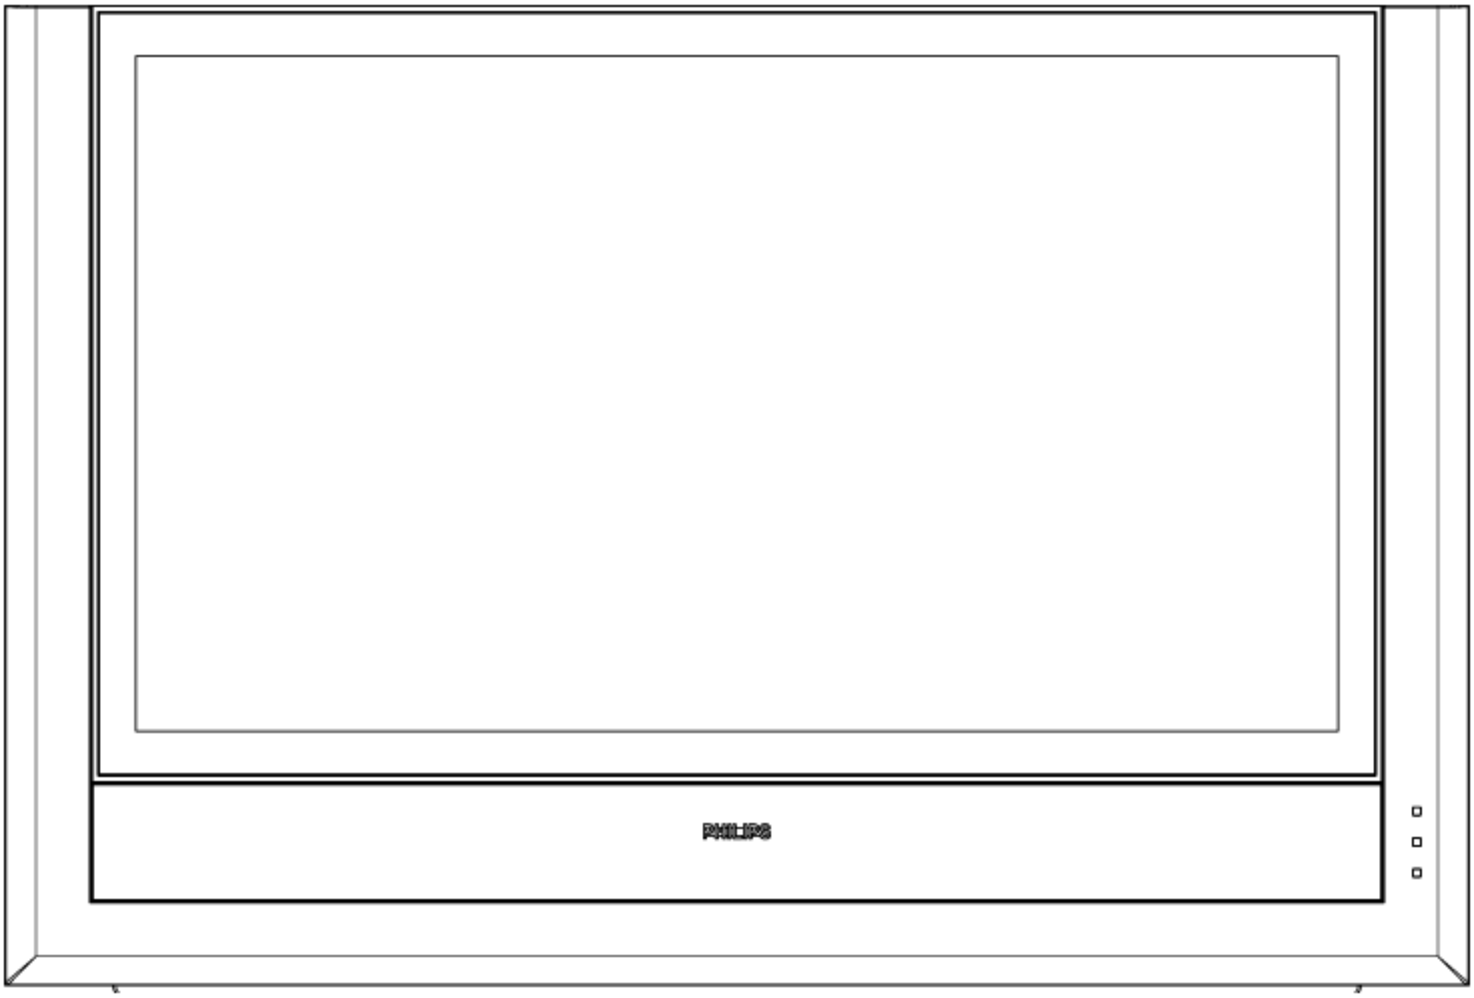

Remote Control

3 different Remote Control Transmitters are currently being used with this product.

44" Cineos product uses the RC2043/01B (PN#: 3128 147 13203).

55" & 62" EPIC models use the RC4336/01 (PN#: 3139 238 07841).

55" & 62" Matchline Models use the RC4308/01B (PN#: 3128 147 16361).

Refer to the Replacement Parts Data for the most current data available (see Item 1085 for Remote Transmitters).

INTRODUCTION

The EM8U chassis is designated for release in the 2004 model year. This is a rear projector based on LCoS (Liquid Crystal on Silicon) technology. LCoS is a reflective LCD technology. The light source is an

ARC projection lamp that is replaceable by the customer. This projector is lighter and more compact than comparable size projection sets using tubes. They will be available in 44 and 55 inch screen sizes. All of the screen sizes will have a 16x9 aspect ratio. The following table shows the dimensions and weights.

Screen size	Height	Width	Depth	Weight
44 inch	31.7"	46.7"	14.6"	68.8 lbs
55 inch	38.7"	57"	17.7"	83.9lbs

The EM8U is a High Definition Ready set with a screen resolution of 1280x720. It does not have a ATSC Tuner built in. A Set Top box will be required for viewing ATSC signals.

SET OPERATION

The set has three 1H or NTSC only inputs. They are AV1 and AV2 located on the rear Jack Panel. The third input is the Side Jack panel. AV3 and AV4 can be either 1H NTSC, 480P, or 1080I signals. These signals must be in the Y Pb Pr format. AV5 is a DB15 RBG input. AV6 is a DVI 1080I input connector. The RF input on the Rear Jack panel is for NTSC only. The MON OUT is a monitor output for whichever 1H Tuner, AV1, AV2, or Side Jack panel signal has been selected.

The indicator LEDs and the Remote Control Receiver are located on the front of the set. When the set is turned On, the Amber LED will turn On. After the Lamp in the set has switched On, the Green LED will turn On.

The Control Panel is located at the top of the set. The Power On button is lighted with a blue LED whenever power is applied to the set.

When the set is turned On via the Keyboard or Remote Control, the set will take approximately 30 seconds to display a picture. By using the Select button, the Remote can be used to control other devices. A list of setup codes for other devices is located in the customer's operator's manual. The customer can select the Menu button on the Remote to make additional selections and adjustments as desired. Use the cursor right and cursor down buttons on the Remote to select the desired topic.

When Picture is selected, use the cursor down button to select the desired subtopic. For example, press the cursor down button to select Contrast then use the cursor left and cursor right buttons to change the values. Additional dots on the lower part of the line indicate that additional selections are present. Continue to press the cursor down button to make these selections.

MAINTANENCE

Note: The following topics are all taken from the Customer Owner's Manual. They are repeated here as a convenience and with the assumption that some customers may fail to accomplish these tasks or possibly may have misplaced their Owner's Manual.

Cleaning or Replacing the Filters

The Cineos TV has two filters that cover air inlets on the bottom of the set. Maintaining a free flow of air through the inlets is very important. If the air filters become dirty, clogged, or blocked, the temperature in the set will rise.

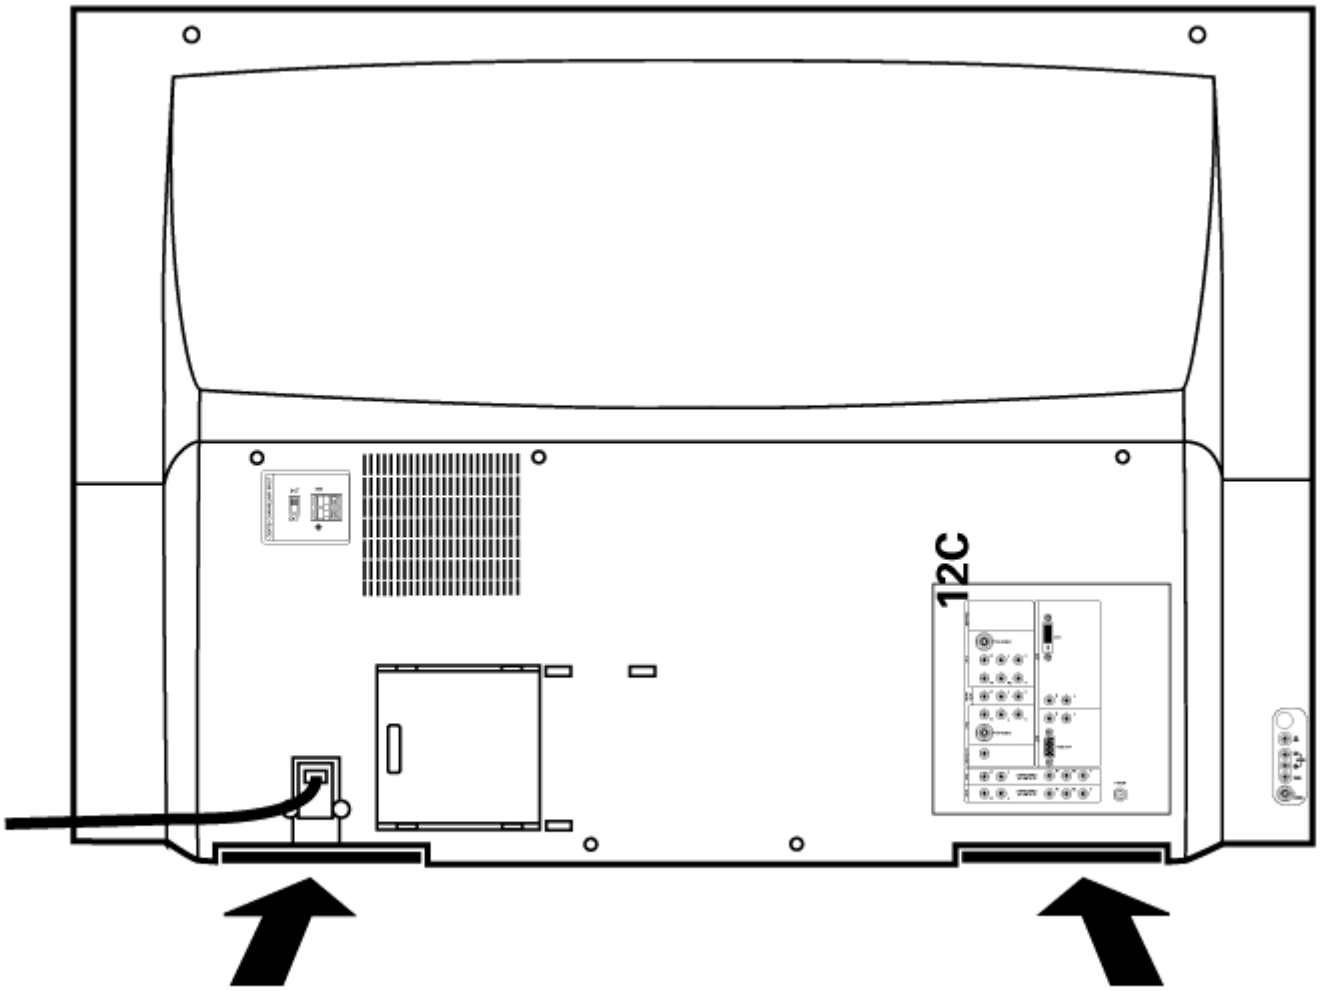

Locations of Air Filters

Should the heat level become too high due to blockage, a sensor detects this, and a warning message appears on screen alerting you to check the air inlets for blockage. The message will be displayed for 6 seconds. It reappears every 15 minutes as long as the temperature remains too high.

If the internal temperature of the TV rises to high, a warning message alerts you that the TV is shutting down. If the temperature remains at this high level for 1 minute, the TV will enter Standby mode. In Standby mode, the TV is off.

Be sure the TV is not placed on a surface (such as a shag carpet) that will prevent the free flow of air through the inlets, and periodically clean or replace the filters as detailed in the following instructions.

WARNING: Do not tip the TV when removing or installing the filters. This may result in

instability of the TV.

1. Place your fingers under one of the filter slots located at either bottom left or right in back of the TV cabinet.

2. Grasp the filter and gently pull it straight out.

3. Examine the filter for dust or other contamination. If it is dirty, clean it with a vacuum cleaner. DO NOT WASH it. Replace the filter if vacuuming does not sufficiently clean it.

To order replacement filters, call the Philips Customer Care Center at 1-800-531-0039. The part number for the Philips TV inlet filter assembly is 3135 037 51810.

WARNING:

DO NOT operate the TV without filters. This will cause serious damage to the TV.

4. Turn the filter so that the arrow is pointing toward the center of the TV. Align the edges of the filter with the slot track, then gently slide it all the way back into the slot. A click sound can be heard as the filter reaches the correct position.

Replacing the Lamp

The Cineos TV uses a lamp with a limited lifetime to illuminate the picture. A Lifetime counter in the TV records the operating time of the lamp. One hundred hours before the lamp reaches the end of its life, a warning message will appear on screen. This will allow you to prepare to replace the lamp or take action right away. The message will disappear within 6 seconds. It will reappear each time the TV is turned on until the lamp is replaced.

To order a replacement lamp, call the Philips Customer Care Center at 1-800-531-0039. A Philips associate will be happy to assist you. The part number for the Philips TV replacement lamp is 3122 438 71310.

Here are the steps for replacing the lamp:

1. Power off the TV. Unplug the TV.

2. The lamp door is located on the back of the TV next to the power cord.

Gently slide the door completely to the right to open.

CAUTION: The lamp gets extremely hot. Allow a cool-down time before removing the lamp.

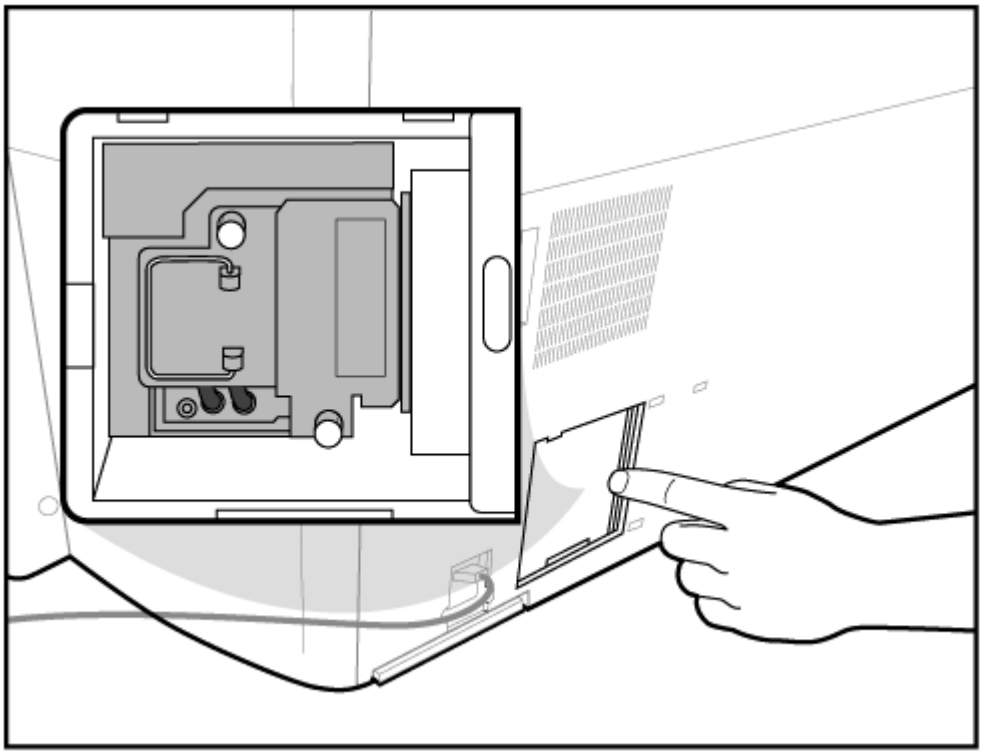

3. Unscrew the thumb screws until they are dangling.

4. Lift the handle out.

5. **CAUTION:** When removing the lamp, do not touch the glass envelope. It may still be hot.

Grasp the handle, then pull out and slightly down to remove.

WARNING: The lamp contains mercury. Dispose of the lamp in accordance with local, state, and federal regulations.

6. **CAUTION:** When installing the new lamp, do not touch the glass envelope. Oil from skin can reduce lamp life.

Align the groove on top of the new lamp's housing with the corresponding groove pocket inside the TV, then slide the new lamp into place.

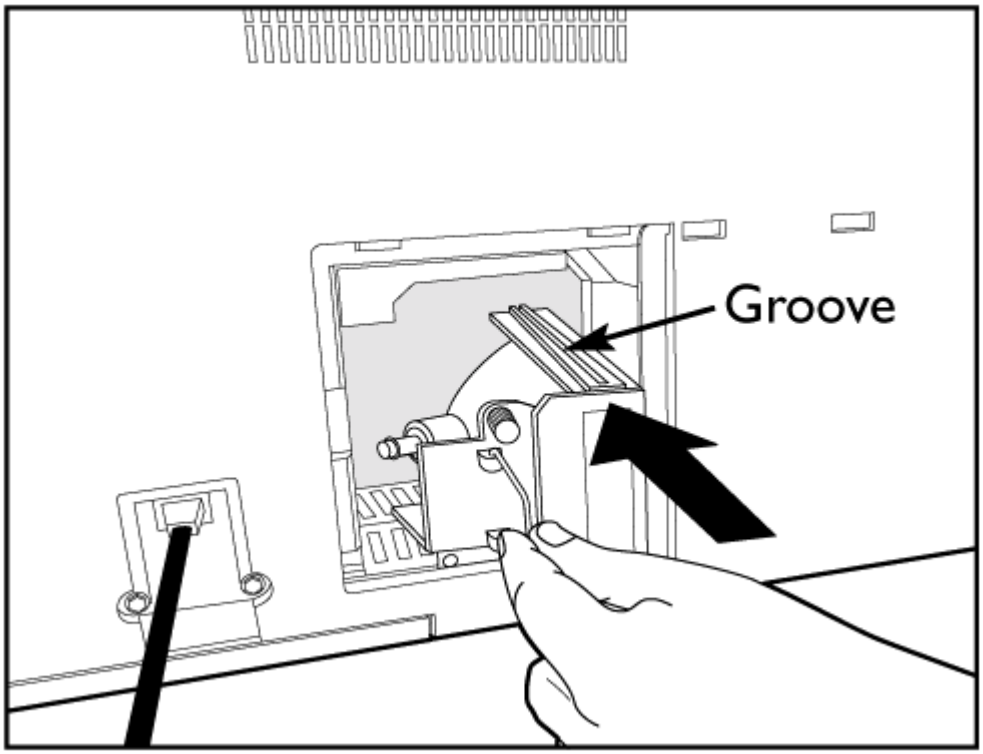

7. Tighten the thumb screws clockwise until finger tight only. Do not over-tighten.

8. Slide the lamp door closed.

IMPORTANT: The door must be closed completely to the left. Otherwise, the TV will not operate.

9. Continue with instructions for setting the Lamp Rating and resetting the Lamp Lifetime Counter.

Resetting the Lamp's Lifetime Counter

After installing a new lamp in the TV, you need to enter the "Lamp rating" list in the onscreen menu and select the alphabetical code that is provided with the lamp. The recommended Philips replacement Lamp is rated for 6000 hours, an F rating

The next step is to use the "Lamp replaced control" to tell the TV that you have installed a new lamp. This control resets the Lifetime Counter to 0 for the new lamp and begins keeping track of the lifetime of the new lamp.

1. Press the Menu button on the remote control to display the on-screen menu.

2. Press the Cursor Down button to select "Settings."

3. Press the Cursor Right button to select the "General" menu.

4. Press the Cursor Down button repeatedly until "Lamp rating" is selected.

5. Press the Cursor Right button to enter the rating list.

6. If necessary, press the Cursor Down button as many times as necessary to select the letter for your replacement lamp.

7. Press the Cursor Left button to return to the "General" menu.

8. Press the Cursor Down button to select "Lamp replaced."

9. Press the OK button to confirm that you have changed the lamp.

10. Press the Menu button to remove the on-screen menu from the TV screen.

HELPFUL HINTS

* One hundred hours before the lamp reaches the end of its life, a warning message will appear on screen to alert you. Changing the lamp at this point is recommended for optimal performance.

* A blinking orange light on the front of the set means that the lamp is not working anymore and needs to be replaced.

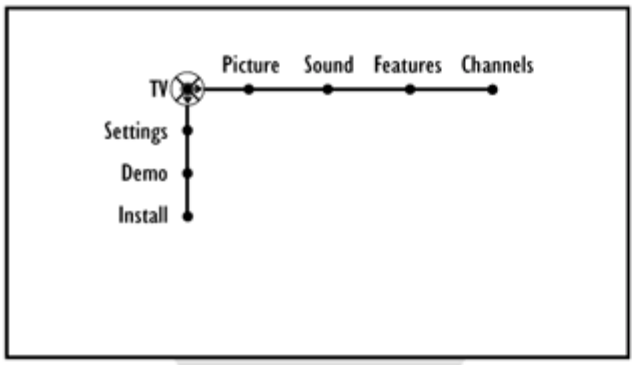
TV
Picture
Sound
Features
Channels
Settings
Demo
Install

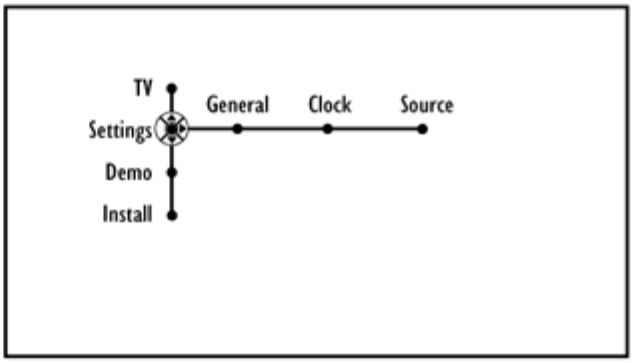
TV
Settings
General
Clock
Source
Demo
Install

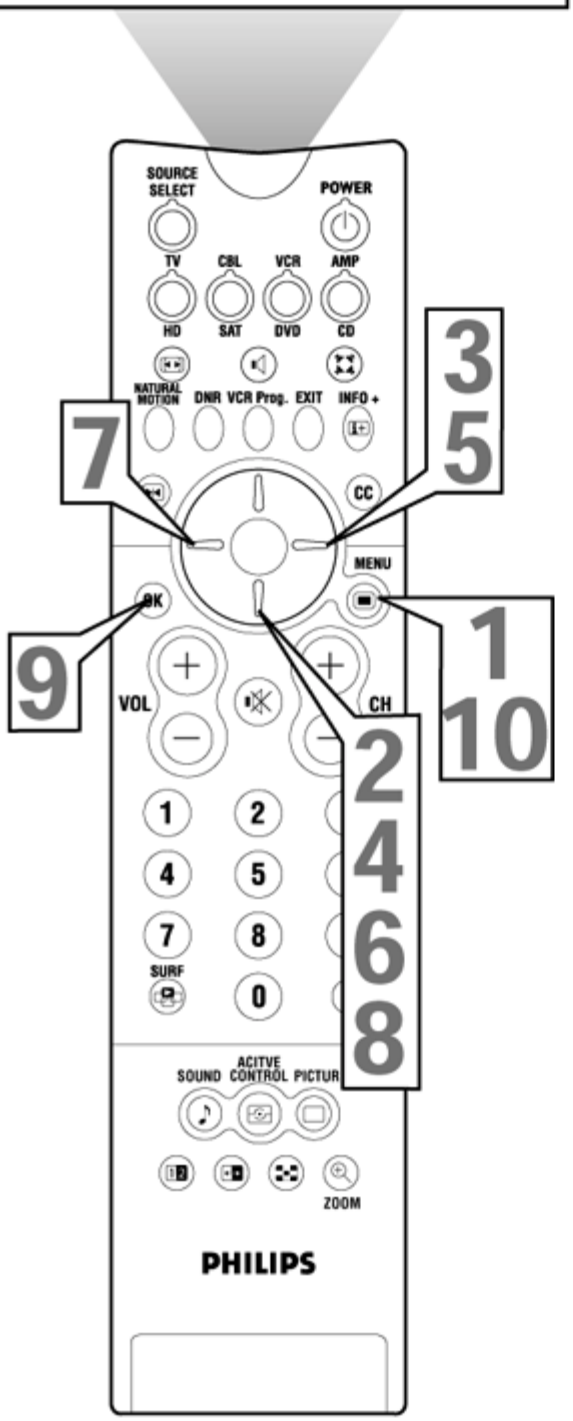
SOURCE SELECT
POWER
TV
CBL
VCR
AMP
HD
SAT
DVD
CD
NATURAL MOTION
DNR
VCR Prog.
EXIT
INFO +
CC
MENU
VOL
CH
SURF
ACITVE CONTROL
SOUND
PICTUR
ZOOM
PHILIPS
3
5
7
9
1
10
2
4
6
8

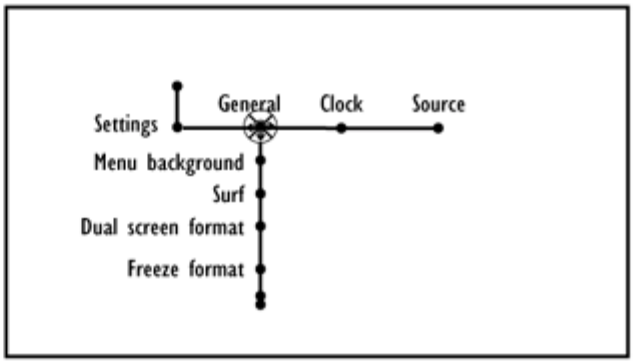
Settings
General
Clock
Source
Menu background
Surf
Dual screen format
Freeze format

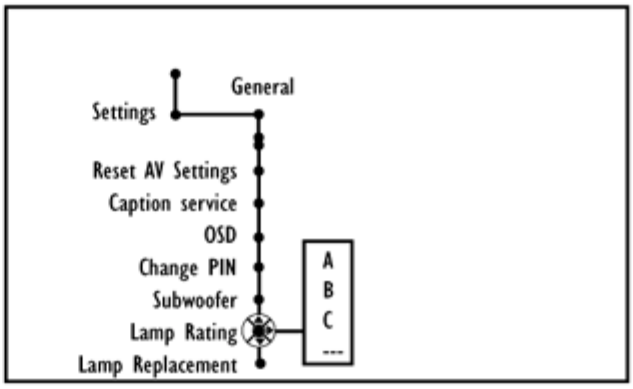
Settings
General
Reset AV Settings
Caption service
OSD
Change PIN
Subwoofer
Lamp Rating
Lamp Replacement
A
B
C

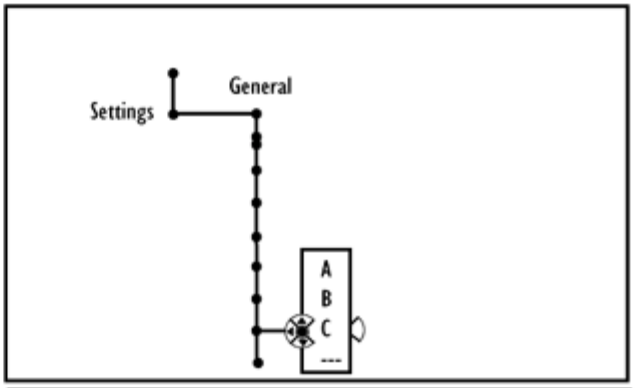
Settings
General
A
B
C

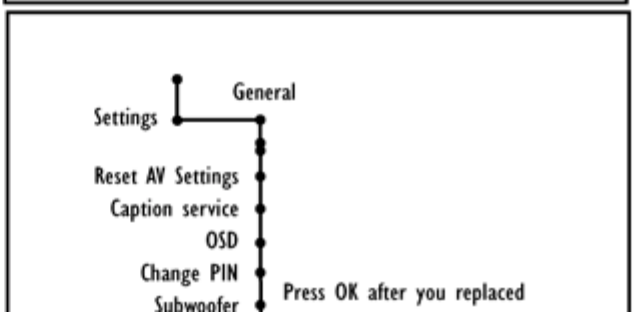
Settings
General
Reset AV Settings
Caption service
OSD
Change PIN
Subwoofer
Press OK after you replaced

Preliminary (Customer) Troubleshooting

Review This List of Symptoms and Checks Before Requesting Service

You may be able to solve the problem yourself. Charges for TV installation and adjustment of customer controls are not covered under your warranty.

If you need to call a customer service representative, please know the model number and serial number of your product before you call. This information is displayed on the back of the product. Also, please take a moment to identify the problem you are having, and be prepared to explain this to the representative. If you believe the representative will need to help you with operations, please stay near the product. Our representative will be happy to assist you. **To reach our Customer Care Center, call 1-800-531-0039.**

TV-related Checks

The TV won't switch on.

* Make sure the power plug is plugged in.

* If you're using the TV remote control to turn the TV on, be sure the remote is in TV mode.

* Plug something else in to be sure the wall outlet (or extension cord) is receiving power.

* The remote control could have a problem. See the troubleshooting section "Remote-related Checks" on next page.

* Make sure the lamp door is not ajar. The TV is designed not to operate with the lamp door open.

* If a red light is blinking on the front of the TV, the set has entered protection mode. If this happens it usually means you simply need to reset the TV. Unplug the TV for 60 seconds. Then plug the TV in and try to switch it on. If the light is still blinking red, call the Customer Care Center at 1-800-531-0039.

The TV switches off unexpectedly.

* If the lamp door is open, the TV will shut down. The TV is designed not to operate when the lamp door is ajar.

* If a red light is blinking on the front of the TV, the set has entered protection mode. Unplug and plug the set back in a couple of times and try to switch it on. If the problem persists, contact the Customer Care Center at 1-800-531-0039.

* The Sleeptimer may have been set to turn the TV off. Turn the TV back on if desired.

The TV switches on unexpectedly.

* The On Timer may have been set.

An on-screen message tells you that it is time to replace the lamp.

* The message appears on screen when the lamp has 100 hours of life left, and will reappear each time the TV is turned on until the lamp is replaced. Prepare to replace the lamp or take action right away.

An on-screen message instructs you to check the air inlets for blockage.

* Check the air inlets and filters for blockage and clean or replace the air filters as necessary.

You have a picture but no sound.

* Make sure Mute is not on.

* The TV speakers may be turned off. Make sure the Center Channel Amp Switch on the back of the TV is in the INT position.

You have no picture.

* If you have made a connection to the TV's Tuner jack be sure to use Autoprogram.

* If you want to view materials from an accessory device (DVD player, VCR, or satellite receiver, for example) be sure you have selected the input source to which you have connected the device-AV1, AV2, AV3, AV4, AV5, AV6, or Side.

* Make sure you have made connections correctly.

You have no picture and no sound.

* If you see a blinking orange light on the front of the set, this means that the lamp needs to be replaced.

You see scrolling images.

* Make sure you have made connections correctly.

The picture appears doubled or tripled.

* If you are using an antenna, be sure it is facing in the correct direction. Also, check to see if it may be receiving signals that are being reflected off of mountains or buildings.

The picture shakes or is not clear.

* If you are using an antenna, make sure it is not broken or shorted, and make sure the antenna cable is connected properly and securely.

* If you are using a VCR and selecting channels on the TV, make sure the TV/VCR mode on the VCR is set to TV.

The picture has no colors or colors are not correct.

* Make sure you have made connections correctly.

* If you have connected accessory equipment, such as an HD satellite receiver, make sure the color setting on the accessory equipment is correct. See the user manual for the HD satellite receiver.

The TV sound has an unusual quality.

* Check the TV's Equalizer control to be sure it is set to the option you want.

Remote-related Checks

The remote control does not work.

* Make sure nothing is blocking the path between the remote control and the TV or accessory device you want to operate.

* Make sure you point the remote directly at the TV or accessory device you want to operate.

* If you want to operate the TV, make sure the remote is in TV mode. If you want to operate an accessory device, program the remote for the device if necessary and make sure the remote is in the appropriate mode for the device.

* Make sure you have installed the batteries correctly.

* The batteries could be dead. When the batteries in the remote run low, the remote will send a "Battery Low" command to the TV.

The TV will then display a message on the screen reminding you to replace the batteries as soon as possible.

* You may want to try taking the remote batteries out and putting them back in. NOTE: After taking the batteries out, you may need to reprogram the remote for use with accessory devices.

Reflective LCD Introduction.

The LCOS (Liquid Crystal on Silicon) uses a reflective LCD system. A single reflective LCD panel with

multiple LCD cells is used. Since a single panel is used, it is necessary to scan the panel with the primary colors to obtain a color picture. A LCD is a light valve which allows more or less light through it, depending on the applied voltage.

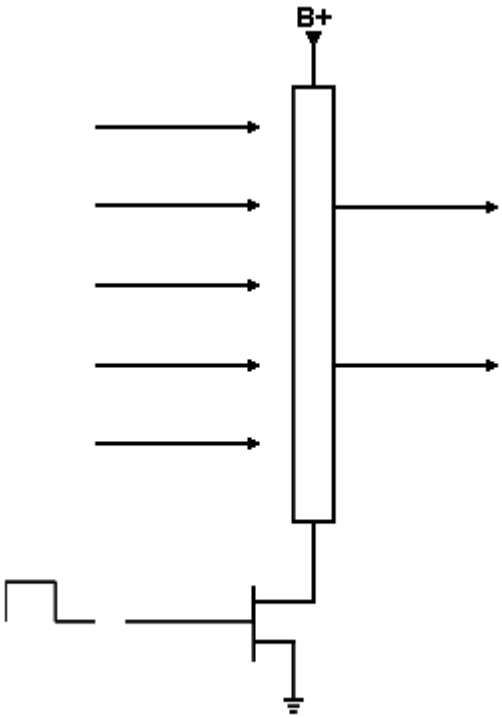

LCD CELL

The LCD used in most projectors and direct view LCD TVs uses a transmissive type of LCD. Light is projected to pass through the LCD panel. One of the disadvantages of this type of system is that the electronics to control the LCD cells limit the surface area in which light can pass. This limits the resolution of the picture and brightness.

The Reflective type of LCD, like the one used in the LCOS, has the electronics beneath the LCD cells, allowing greater resolution. The LCD cells are turned On, switching the individual cells. Beneath each cell is a reflective surface. The amount of light reflected from each cell depends on the applied voltage. Since the LCD may be illuminated by all three primary colors at one time, several cells are addressed at once.

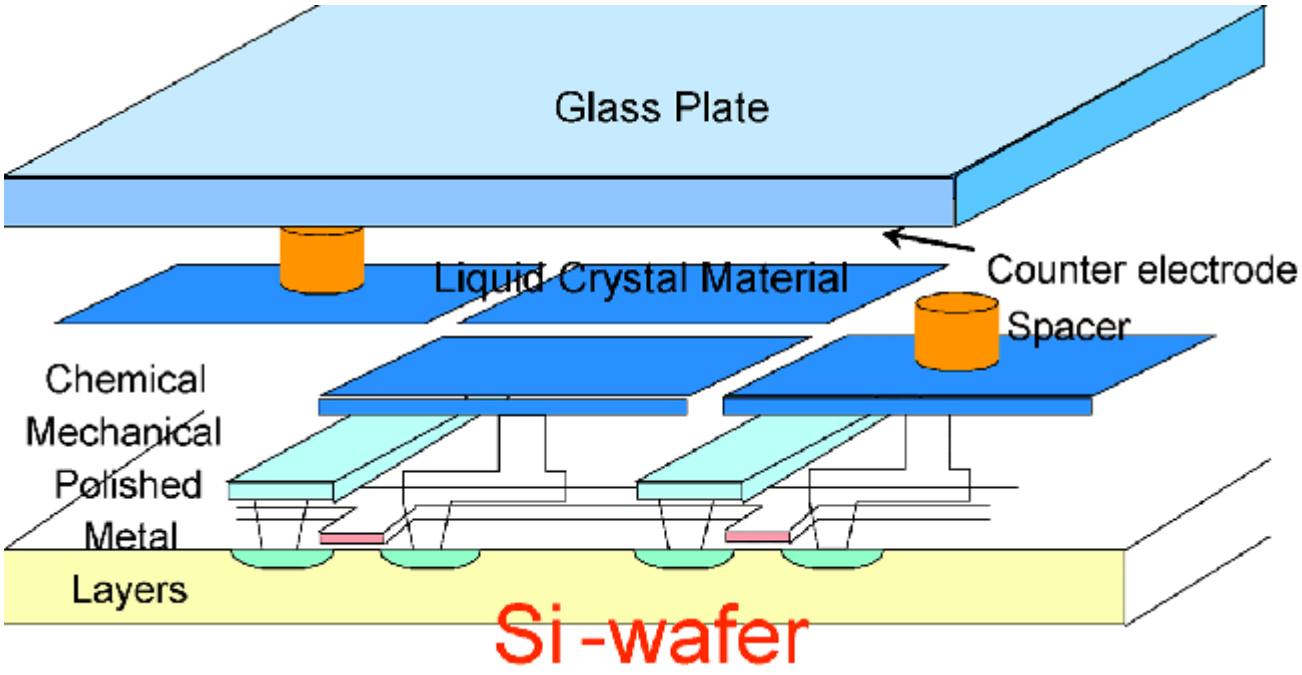

The Reflective LCD used in the LCOS projector uses a 1280x1024 device with 20 micron pixels. Since the aspect ratio of the TV is 16x9, the actual area used is 1280x720.

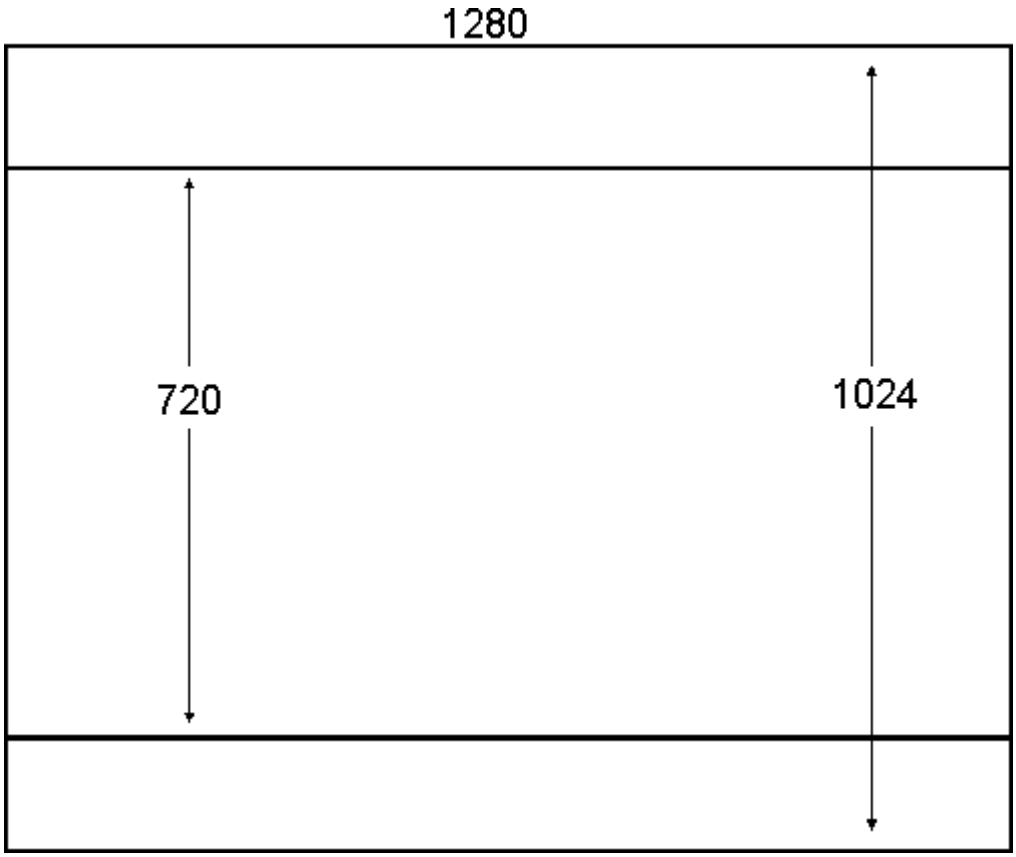

Regardless of the format of the input, the LCD displays the picture in a 1280x720 format.

The Philips LCOS projector uses a single LCD device. To obtain a color picture, the LCD is scanned with strips of Red, Green, and Blue light. The strips of color are developed by splitting the light from the Lamp

and directing it to three color filters which produce Red, Green, and Blue light. The output from the filters is directed to three rotating Prisms to produce the color strips and direct it to the correct part of the LCD. Data is directed to the LCD in such a way that the correct data for color illuminating that portion of the LCD will be displayed. The LCD is being scanned a rate of 180 Hz. The phase of each prism is offset by 30 degrees to provide color separation. The reflected light from the LCD is fed to a projection lens, the mirror, and finally the screen.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

DISASSEMBLY

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation

Visit our World Wide Web Site at http://www.forceonline.com

Disassembly Procedures for 44” & 55” LCoS

Main Cabinet Exploded View

Item Numbers and Letter Identifiers mentioned below, refer to the Main Cabinet Exploded View.

Display The Main Cabinet Exploded View.

NOTE: If you are servicing a Printed Circuit Board or main speaker, you do not need to remove the Upper Back Cover.

Lower Back Cover (Item 0036)

1. Remove (13) T20 Torx screws and (2) T10 Torx screws (A).
   Note: It may be necessary to press on the sides of the lower back where it “snaps” into place at the front cabinet to get it to release.
2. Remove (2) T6 Torx screws (B) holding the Side Jack Panel (Item 0127), disconnect connectors 1335 and 1344 and ground connector 1337.
   Note: The ground tab has a small catch to release during removal.
3. Slide the Side Jack Panel through the rear of the back cover.

Upper Back Cover (Item 0034)

Note: The Lower Back Cover must be removed before removing the Upper Back Cover.
Note: The Upper Back Cover holds the Mirror.

1. Remove (8) T20 Torx screws (C).
2. Remove (2) T20 Torx screws (D) attaching the Fan Motor Assembly to the Upper Back Cover.
3. Remove (4) T20 Torx screws (E) attaching the small signal cable assembly harness to the Upper Cabinet Back. (Not shown)
   Note: It may be necessary to press on the sides of the upper back where it “snaps” into place at the front cabinet to get it to release.
   Note: When replacing the Upper Cabinet Back, care should be used to properly route the cable for the customer control assembly.
   Note: When re-installing the Upper Cabinet Back, care should be taken to correctly position the Light Shield that is attached to the Upper Cabinet Back.

Mirror (Item 0021)

1. Remove both Lower and Upper Cabinet Backs.
2. Remove both the Left and Right Vertical mirror support brackets. (Items 0079 & 0080)
3. Remove both Horizontal Mirror support brackets and remove the mirror. (Items 0078)
   Note: Care should be taken **NOT** to place fingerprints or smudges on the mirror.

Input Power Supply (Item 1045)

1. Remove (2) T20 Torx screws (N) attaching the power assembly bracket (Item 0117) to the base assembly (Item 0038).
2. Slide the power assembly rearward as far a possible.
   Note: It may be necessary to release cable harnesses to gain adequate access.

3. Remove (6) T10 Torx screws (O) securing the input power panel to the power assembly bracket.

Main Power Panel (Item 1010)

1. Remove (2) T20 Torx screws (N) attaching the power assembly bracket (Item 0117) to the base assembly (Item 0038).
2. Slide the power assembly rearward as far a possible.
   Note: It may be necessary to release cable harnesses to gain adequate access.
3. Remove (6) T10 Torx screws (P) securing the main power panel to the power assembly bracket.

SSB Panel (Item 1185)

1. Remove (3) T10 Torx screws (Q) securing the SSB bracket (0072).
2. Remove all ribbon cables from the scaler panel and the system board.
3. Release the (2) metal clips located at either end of the SSB panel 80 pin connector, and tilt the SSB panel to the right.
4. Slide the SSB panel from its connector.

Scaler Panel (1052)

1. Remove (2) Torx screws (R) from the bottom of the small signal assembly securing it to the cabinet base.
2. Remove (14) T10 Torx screws (S) securing the cinch plate to the small signal assembly.
3. Remove (4) hex screws. Two each at the DVI and RGB-HV input connectors.
4. Remove the cinch plate.
5. Disconnect the main video cable by unscrewing the (2) thumbscrews and disconnect the (2) ribbon cables.
6. Slide the scaler panel rearward to disconnect from its connector on the system board.

Cinch Panel (1016)

1. Remove (2) Torx screws (R) from the bottom of the small signal assembly securing it to the cabinet base.
2. Remove (14) T10 Torx screws (S) securing the cinch plate to the small signal assembly.
3. Remove (4) hex screws. Two each at the DVI and RGB-HV input connectors.
4. Slide the cinch panel rearward to disconnect from its connector on the system board.

Audio Panel (1012)

1. Remove (2) Torx screws (R) from the bottom of the small signal assembly securing it to the cabinet base.
2. Slide the small signal assembly rearward to allow access to the front of the assembly.
3. Remove (4) T10 Torx screws (T) securing the audio panel to the small signal assembly bracket.
4. Remove the (4) cable harnesses.

System Board (1020)

Note: The Audio, Cinch, Scaler, and SSB panels should be removed prior to removal of the system board.

1. Remove (2) Torx screws (R) from the bottom of the small signal assembly securing it to the cabinet base.
2. Slide the small signal assembly rearward to allow access to the front of the assembly.
3. Remove (4) T20 Torx screws (U) securing the system board bracket to the small signal assembly bracket.
4. Release (2) clips holding the system board to the system board bracket.
5. Remove remaining cable harnesses.

Keyboard (Customer Controls) (1032)

1. Remove (2) T20 Torx screws (V) holding the Keyboard and cover to the cabinet cap.
2. Remove (2) T6 Torx screws holding the circuit board to the control bracket.
3. Release (4) plastic clips holding the circuit board to the control bracket and lift the PWB from the bracket.
4. Disconnect connector 1201 and ground clip 1202.

Speakers (Woofer) (Item 5213)

1. Remove Lower Back Cover item 0034.
2. Remove (2) T20 Torx screws (R) to allow the small signal assembly to slide to the rear.
3. Remove (2) T20 Torx screws (N) to allow the power assembly to slide to the rear.
4. Remove (4) T20 Torx screws from the speakers and disconnect the speaker wires.

Speakers (Tweeter) (Item 5214)

1. Remove both the Lower and Upper Back Covers.
2. Remove (2) T20 Torx screws and disconnect the speaker wires.

Speaker Baffle (Item 0039)

Note: There are no adjustments that require the removal of the speaker baffle.
CAUTION: DO NOT REPOSITION THE LIGHT ENGINE TO GAIN ACCESS TO THE SPEAKER BAFFLE TABS.

1. Remove the Lower Back Cover.
2. Carefully release the 20 plastic tabs holding the speaker baffle in place.

Screen Assembly (0030)

1. Remove the Lower and Upper Back Covers
2. Remove (4) T20 Torx screws (W) and remove the Top Cap with Customer Control Assembly. (0032)

3. Disconnect the Tweeter speaker wiring.
4. Remove (9) T20 Torx screws (J).
5. Lay lens assembly on flat clean surface.
6. Remove (12) T20 Torx screws (K) from vertical side rails Item 0075 & 0076.
7. Remove (16) T20 Torx screws (L) from horizontal screen rails Item 0077.

LED Panel (1028)

1. Remove Lower Back Cover.
2. Release (2) tabs and slide out the LED panel.
3. Disconnect connectors 1201 & 1214.

Lamp (0016)

CAUTION: The light source lamp produces extreme heat. Allow a cool-down period before touching or replacing the lamp assembly.

Note: For protection, the lamp circuit contains a "normally closed" switch. Therefore, the lamp will not operate with the lamp access door in the open position.

Note: There are no tools required for this procedure.

1. Slide the lamp access door on the rear of the unit to the right. (Item 0096)
2. Unscrew the two silver thumbscrews holding the Lamp assembly in place.
3. Slide the old lamp assembly out by crisping the "metal handle" and pulling straight out.
4. Install the replacement lamp assembly by pushing into place and tightening the thumbscrews.
5. Slide the Lamp access door to the left to close**. "The unit will not operate with the back on and this door open."**

Light Engine

CAUTION: Do not remove the three "SILVER" nuts and washers as these hold the Light Engine support bracket and are critical adjustment points for focus and picture alignment.

CATUION: The Light Engine has an operating voltage of approximately 1,000 volts. Always use caution when working in the vicinity of the Light Engine while the unit is in operation.

Note: The LCoS Light Engine comes pre-adjusted. No adjustment for focus should be required. In rare cases, the set may require a minor focus touch up.

Note: Use care with the routing of the wiring for the Customer Keyboard when replacing the upper-back. Also, note mounting direction of the Upper-back support bracket for proper re-installation.

1. Remove the Lower and Upper Back Covers.
2. Remove the Cooling System Fan Assembly.
3. Remove the (3) "BLACK" T-10 Torx screws (Y) (mounted on posts) located in the vicinity of each of the 3 "silver" nuts and washers.
   Note: The front T10 Torx screw is located directly beneath the 10mm wide, white clip, located on the top front of the Light Engine housing.
4. Disconnect the wiring harness connected to the Light Engine power supplies, the Main Power supply, and the video cable coming from the Scaler Panel.

Cooling System Fan Assembly (Item 0150)

1. Remove the Lower and Upper Back Covers.
2. Remove (1) T10 Torx screw (X).
3. Slide the power supply assembly back to allow room to remove the cooling fan assembly.
4. Disconnect the cooling system fan assembly wiring harness.

TYPICAL LCoS 44", 55", & 62" EXPLODED VIEW

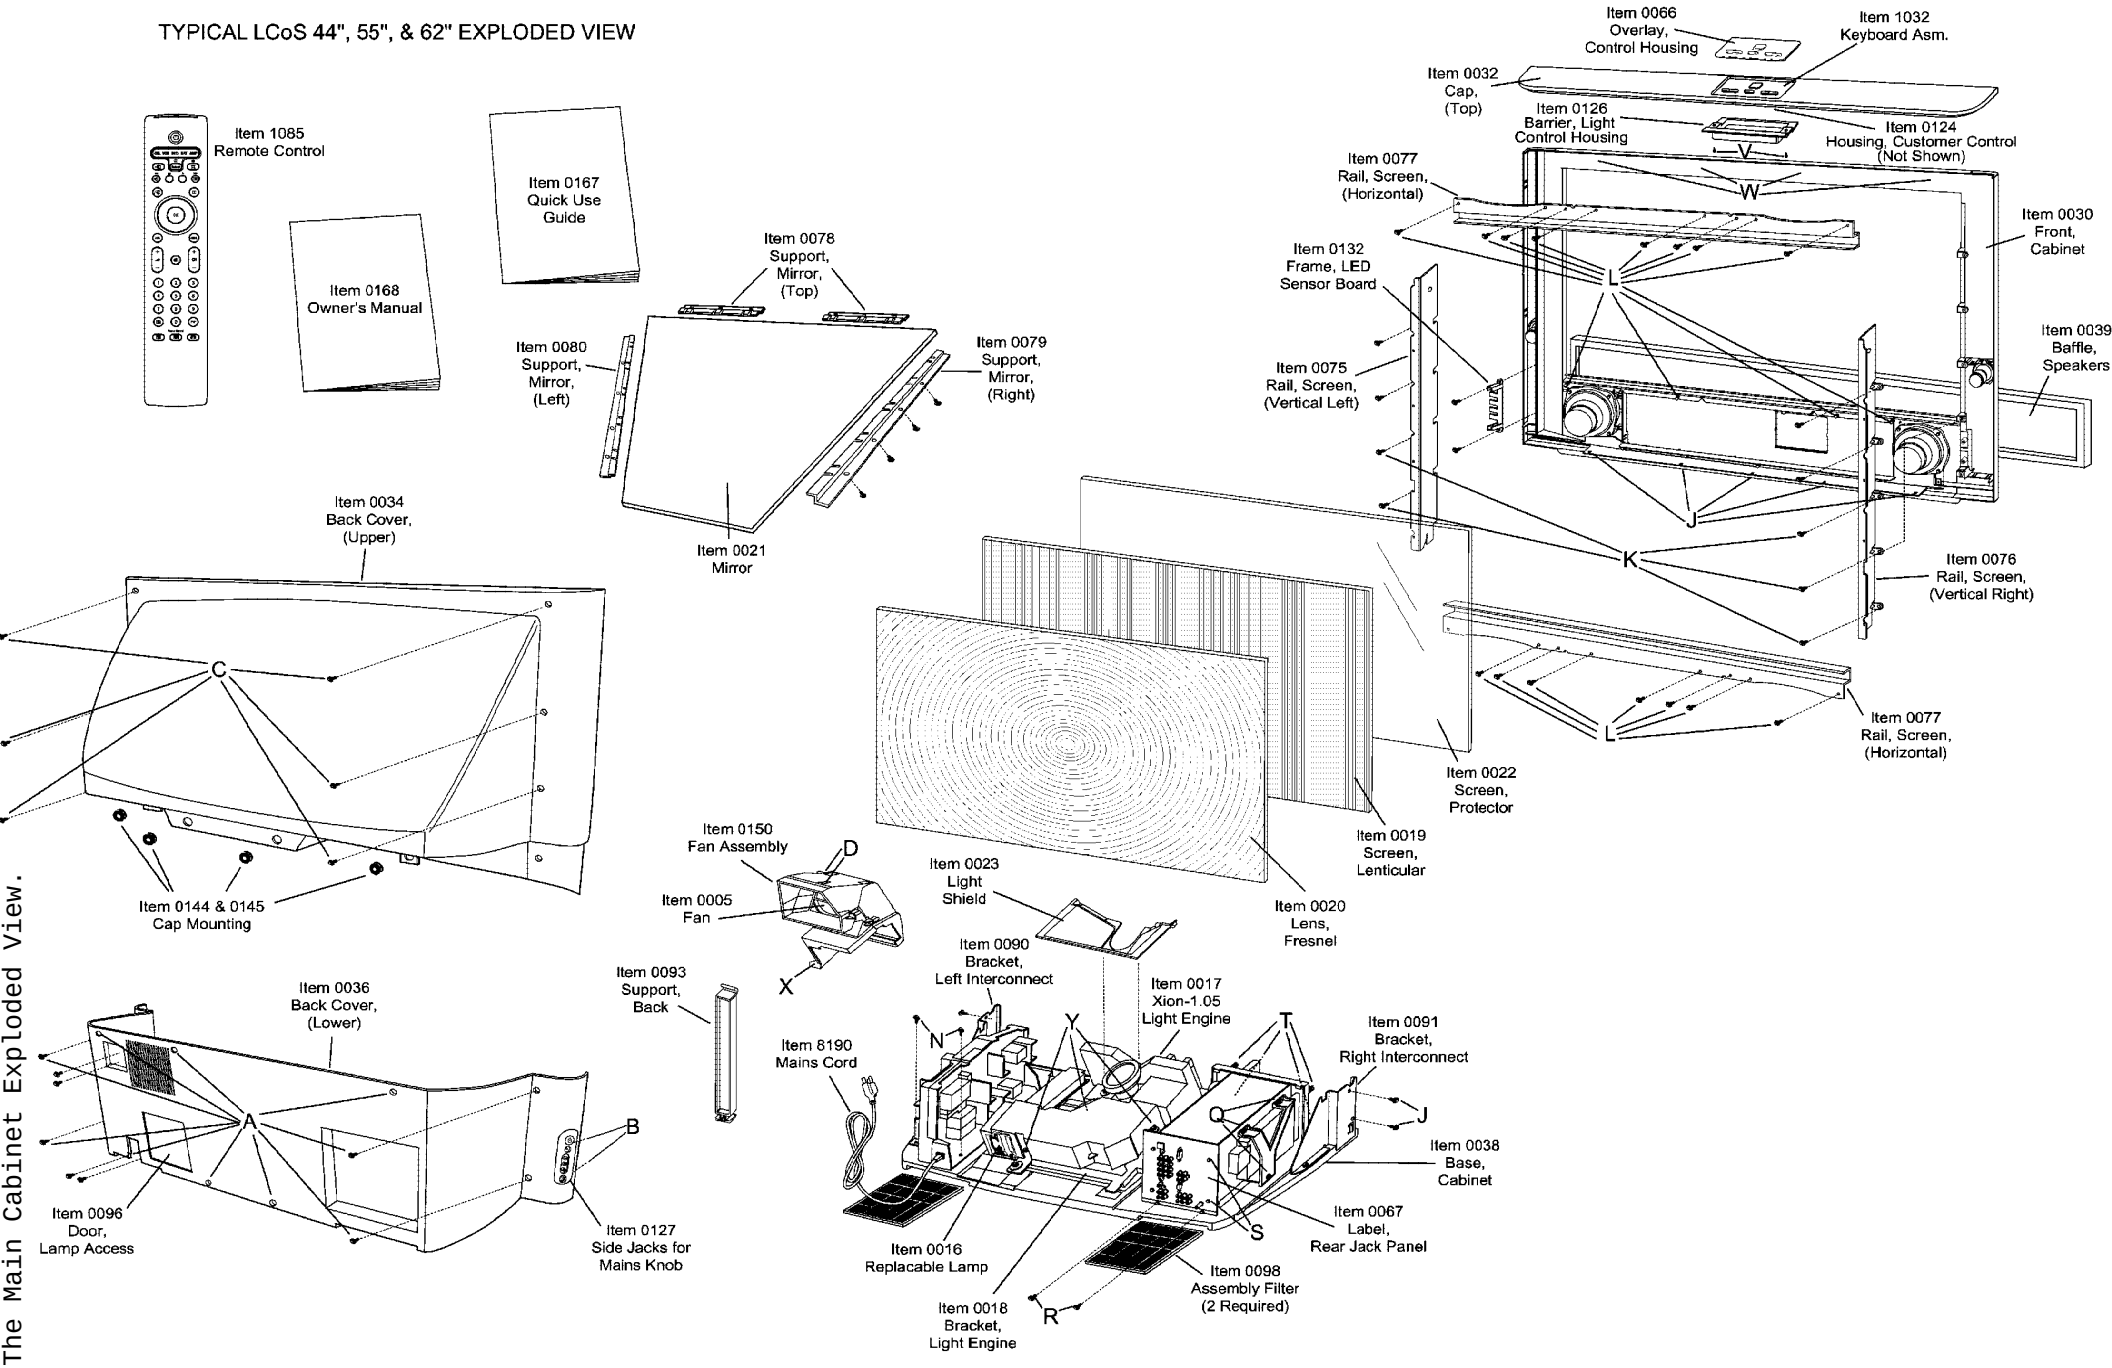

Display The Main Cabinet Exploded View.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

ADJUSTMENTS

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LCoS Adjustments (Manual 7643)

The following topics are covered:

- Test Points
- Service Modes
- Error Code Buffer and Error Codes
- Blinking LED Procedure
- Lamp Replacement Procedure
- Light Engine Replace Procedure
- Light Engine Focus and Alignment

Waveform Test Points

The LCoS chassis is equipped with waveform test points shown on the schematic diagrams.

To access these waveforms, click on the SCOPE SIGNALS icon in the Force 32 toolbar. From the pop-up window double click on the desired waveform. The waveform window is expandable for best viewing.

Measurements should be performed under the following conditions:
Video: Color bar signal
Audio: 3kHz left, 1kHz right

Service Default Mode (SDM)

Introduction

The **Service Default Mode** (SDM) is a technical aid for the service technician. The Service Default Mode (SDM) establishes fixed, repeatable settings of customer controls, which allow consistent measurements to be made. The SDM also initiates the blinking LED procedure and, if necessary, overrides the 5V protection.

The following functions are turned OFF while in SDM:

- Timer
- Sleep timer

The following functions are disabled during SDM (and enabled after leaving SDM):

- Parental lock
- Blue mute
- Hospitality Mode
- No-ident Timer (normally the set is automatically switched off when no video signal (IDENT) is received for 15 minutes).

All other controls operate normally.

Entering Service Default Mode (SDM)

To enter the Service Default Mode, press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-MENU

Do not allow the display to time out between entries while keying the sequence.
Upon entry into the Service Default Mode, the letters “SDM” will be displayed at the upper right corner of the screen.

Special SDM functions

Access to normal user menu

Pressing the “MENU” button on the remote control switches between the SDM and the normal user menus (with the SDM mode still active in the background)

Exiting Service Default Mode

To exit the Service Default Mode, enter “0” twice.

Note: To save the error codes, “unplug” the AC power cord without turning the set off.

Service Alignment Mode (SAM)

Introduction

The Service Alignment Mode (SAM) is used to align the set and/or adjust the option settings and to display/clear the error code buffer values.

Display SAM Menu Diagram

Entering Service Alignment Mode

To enter the Service Alignment Mode (SAM), press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-INFO+

Do not allow the display to time out between entries while keying the sequence

Exit SAM

Pressing the “MENU” button, entering “0” twice, or powering the unit off with the power button will exit the SAM mode.

Note: To save the error codes, “unplug” the AC power cord without turning the set off.

Explanation of SAM Options

Following is a brief explanation of the options found in the SAM mode.

1	**Operation Hours (Run Timer):** This display indicates the accumulated total of operational hours. (Shown in hexadecimal format)
2	**Software identification of the main microprocessor:** **ROM Version: Apr 7 2003 (EM5US1-MR5.20_90191)** **SW Version Main Scaler; 3122 357 00482** **SW Version EPLD: 3122 357 30210** **SW Version GDE: 3135 037 01221** • **US1** is 2 letter and 1 digit combination to indicate the software type and the supported languages: • **US** = NAFTA • **1** = Main Software language version number **MR5.20_90191 =** sub-version number
3	**Errors (10 errors possible):** Displays the 10 most recent errors. The most recent error is displayed at the upper left.
4	**Defective Module:** Displays “Unknown” if no defective module is found.
5	**Reset Error Buffer:** Pressing the “OK” or RIGHT cursor clears the error buffer and the

	"Errors" level shows **"No Errors."**
6	**Alignments:** Allows access to 6 alignment menus. General, Luminance Delay, MSB, GDE-Video, GDE-NVM, and Gamma.
7	**Dealer Options:** Allows access to dealer **"Personal Options"** menu.
8	**Service Options:** Allows access to 6 service option menus. Dual Screen, Video repro, Source Select, Audio repro, Miscellaneous, Opt. No.
9	**Initialize NVM:** Not Accessible
10	**Store Options:** Select "OK" to SAVE previously changed selections.
11	**Functional Test:** This test finds module Errors and places the Error code in the "Errors" register and shows the module name at the "Defective Module" level. If this test finds no faults, the ERROR buffer is set to "No Errors" and the "Defective Module" level shows "NONE."

SAM Menu Control

Menu items may be selected using the cursor UP/DOWN keys.

- the selected option will be indicated by the enlarged bullet with red curser indicators
- when not all menu options will fit on the screen, pressing the cursor UP/DOWN or LEFT/RIGHT keys, on the remote transmitter, will display the next/previous menu.

With the cursor LEFT/RIGHT keys, it is possible to:

- activate/deactivate the selected menu (e.g. ALIGNMENTS/GENERAL)
- change the value of the selected menu item (e.g. TUNER AGC)
- activate the selected submenu (e.g. TEST PATTERN)

Menu and Sub-menu Definitions

Reset Error Buffer

Erases the contents of the error buffer. Select the **"Reset Error Buffer"** menu item and press the "OK" button or cursor the RIGHT cursor. The contents of the error buffer are cleared.

Error Code Buffer and Error Codes

Explanation of the Error code buffer

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, the error code will appear at the left side and all other errors shift one position to the right.

The error code buffer will be cleared in the following cases:

- by activating "Reset Error Buffer" in SAM menu
- upon automatic reset when content has not changed for 50 consecutive hours

By leaving SDM or SAM via the power switch, the error buffer will not be reset.

Examples:

ERROR: 000 000 000 : No errors detected
ERROR: 036 000 000 : Error code 036 is the last and only detected error
ERROR: 018 036 000 : Error code 036 was first detected and error code 018 is the last detected (newest) error

The contents of the error buffer can also be displayed by use of the "blinking LED" procedure, if no picture is available. See explanation of "The blinking LED procedure "below.

Error code definition

In case of non-intermittent faults, clear the error buffer before starting the repair. Make sure “old” error codes are not present. If possible check the entire content of the error buffers. In some situations an error code is only the result of another error code (and not the actual cause).

Note: A fault in the protection detection circuitry can also lead to a protection.

Error codes 01,02, 03, and 04 are protection codes, and in this case the supplies of some circuits will be switched off. Also in protection, the LED will blink the number of times equivalent to the most recent error code.

Error Code	Description
1	NVM (M24C32)
2	HFB protection
3	Picnic (SAA4978)
4	5VProtection
5	8V Protection
6	Slow I^2C bus blocked
8	HIP I/O-video processing (TDA9320)
9	Wireless Expander (PCF8574)
12	Topic (LTP Peaking) (TDA9178)
13	Tuner Protection
14	ITT sound processor (MSP3411/3412/3452)
15	3D Combfilter protection (μPD64083)
16	Feature Box Protection (FBX)
17	I/O Expander HD Interface (M62320P)
18	Fast I^2C bus blocked
19	Auto Scavem DAC (TDA8444)
21	PIP I/O Expander (M62320P)
22	PIP BOCMA (TDA888X)
23	PIP Tuner
24	PIP Muppet (SAB9081)
25	PIP V-Chip (Z86130)
26	Falconic (SAA4992)
27	Eagle device
28	Back Current loop
32	Flash Ram (EPG)
36	Light engine shutdown Protection Error
37	Light engine shutdown protection. Spontaneous blinking 37-37-37.
38	Lamp Failure.
39	Light engine polarizer fan failure, protection error.
41	Shutdown protection error, spontaneous blinking 41-41-41. GDE not responding
42	Not protection error. GDE NVM error
43	Fan Fault. Not protection error. Shut down if error exists continuously for 2 minutes
44	Ambient Temperature Warning. Not protection error. Message should be displayed for 6 seconds and every 15 minutes as long as temp is above ambient temp.warning
45	High temperature alert. Not protection error. Shut down message should be displayed and system should enter standby after 1 minute if the temperature exceeds this limit.
46	Audio fault (audio board). Not protection error.
47	Audio fault (audio board). Not protection error.
48	Thermo cutoff SW. Protection error

49	Engine Fault Lamp Off. Unexpected Lamp Off. System should enter into standby.
51	Main scaler not working. Communication via EPLD is ok, scaler not responding. Not a protection error.
52	NVM error MSB Pixelworks (local error number MSB=3),
53	Video switch. Local error number MSB=4
54	Audio switch (local error number MSB=5) (TEA6422D)
55	EPLD (local error number MSB=6)
56	ADC error (local error number MSB=7) (AD9888)
57	MSB I2C error. Not protection error
59	Reserved error codes for Nafta Digital TV

The Blinking LED Procedure

NOTE: Perform this procedure WITHOUT any signal applied. This is necessary because making any adjustment, such as lowering the volume, will render the Blinking LED procedure inoperative.

The contents of the error buffer can also be made visible through the “blinking LED” procedure. This is especially useful when there is no picture.

- When the SDM is entered, the LED will blink the number of times equal to the value of any error codes.
  The ON/OFF indicator turning orange for 500 mSeconds precedes all error code sequences. (There is a possibility of up to 10.) After the 500 mSecond delay, the ON/OFF indicator will turn green for 1500 mSeconds before the first code begins. If an error code is smaller than 10, the ON/OFF indicator will rapidly flash orange 1-9 times to indicate the code. (EXP. Six rapid flashes indicates an error code of 6.) There will be a delay, green light, of approximately 3 seconds between codes. For error codes of 10 and higher, the ON/OFF indicator will slowly flash orange the correct number of times to indicate the first digit, and will then rapidly flash orange the correct number of times to indicate the second digit. (EXP. Three slow orange flashes followed by 6 rapid orange flashes indicate an error code of 36.) When all error-codes are displayed, the sequence is finished and the ON/OFF indicator turns green for 3 seconds. At this point the sequence will begin again as indicated by the ON/OFF indicator turning orange for 500 mSeconds.

Example:

Error code position	1	2	3	4	5
Error buffer:	018	006	036	0	0

- After entering SDM: The sequence will begin with 1 long blink of 500 mSeconds, then pause 1500 mSeconds, then slowly blink once followed by 8 rapid blinks (indicating error code 18), next the LED will pause for 3 seconds followed by 6 rapid blinks (indicating error code 6), next the LED will pause for 3 seconds, then slowly blink 3 times followed by 6 rapid blinks (indicating error code 36), then pause 3 seconds ending the sequence in this example. If there were error codes in positions 4 and 5, those sequences would also be given.

Option Codes

Option code changes are made in the SAM mode.

Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter: **0-6-2-5-9-6-INFO+**
Do not allow the display to time out while entering the key sequence.

Curser to the **“Opt. No.”** in the **“Service Options”** level, locate the OPTION CODE LABEL on the rear of

the unit and enter the correct codes for the model being serviced.

Note: Remember to curser to the **"Store Options"** level and select **"OK"** to save these changes.

Lamp Replacement Procedure

CAUTION: The light source lamp produces extreme heat. Allow a cool-down period before touching or replacing the lamp assembly.

Note: For protection, the lamp circuit contains a "normally closed" switch. Therefore, the lamp will not operate with the lamp access door in the open position.

Note: There are no tools required for this procedure.

To replace the lamp assembly, slide the access door on the rear of the unit to the right. Unscrew the two silver thumbscrews holding the assembly in place. Slide the old lamp assembly out by crisping the "metal handle" and pulling straight out. Install the replacement lamp assembly by pushing into place and tightening the thumbscrews. Slide the Lamp access door to the left to close**. "The unit will not operate with this door open."**

Light Engine Replacement and Focus Adjustment Procedure

CAUTION: Do not remove the three "silver" nuts and washers as these hold the Light Engine support bracket and are critical adjustment points for focus and picture alignment.

CATUION: The Light Engine has an operating voltage of approximately 1,000 volts. Always use caution when working in the vicinity of the Light Engine while the unit is in operation.

The LCoS Light Engine comes pre-adjusted. No adjustment for focus should be required. In rare cases, the set may require a minor focus touch up.

Due to screw placement, to replace the Light Engine, it is necessary to remove the upper-back before beginning the replacement. Use care with the routing of the wiring for the Customer Keypad when replacing the upper-back. Also, note mounting direction of the Upper-back support bracket for proper re-installation.

To remove the Light Engine, remove the three "black" T-10 Torx screws located in the vicinity of each of the three "silver" nuts and washers. The front Torx screw is located directly beneath the 10mm wide, white clip, located on the top front of the Light Engine housing. Re-install the Light Engine in reverse order.

Light Engine Focus Adjustment and Alignment Procedure

To access the Focus Adjustments on the Light Engine, it will first be necessary to remove the Speaker baffle. The baffle is removed by gently prying and pulling with the finger tips. Care should be use not to damage the plastic retainer pins.

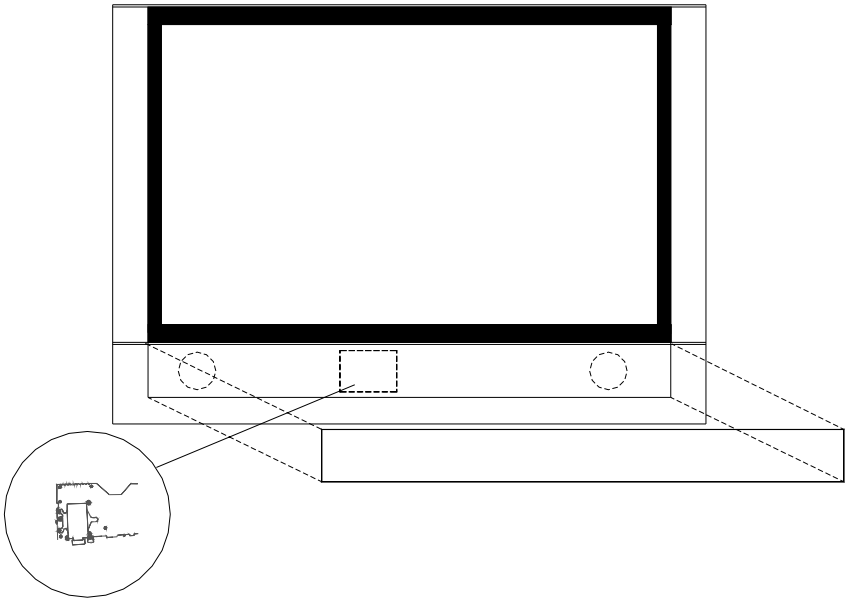

The access port to the focus thumbwheel is located just left of center. An inverted 4.5mm hex socket is required for these adjustments. The upper screw (see below) adjusts the upper right portion of the screen. The thumbwheel adjust the lower part of the screen, and the lower screw adjusts the upper left part of the screen. No more than two complete turns should be required to correct the focus.

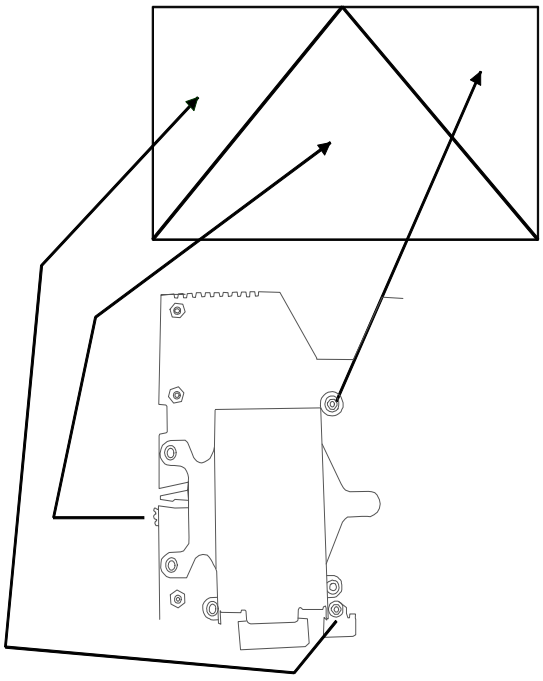

Light Engine Position Adjustment

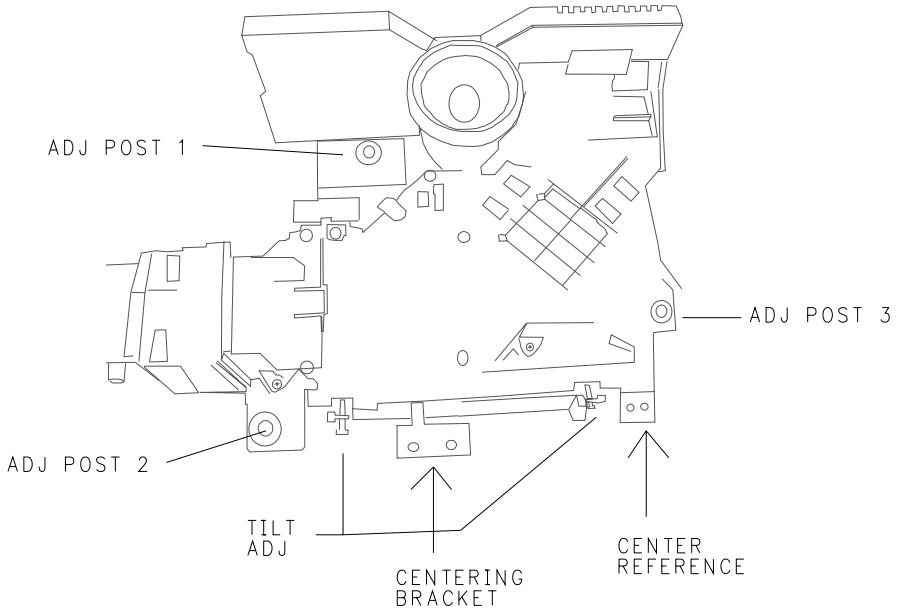

1. Loosen the lock nut on each Adjustment Post. This will require a 4mm wrench.

2. Using a #15 Torx, loosen the Centering Bracket.

3. Place a 1/4 inch or 6mm rod in the Center Reference to keep the Light Engine Centered.

4. Adjust the Tilt Adjustment screws to make the Light Engine parallel with the cabinet.

5. Turn the set on and apply a crosshatch pattern to the set.

6. If the picture is tilted, use adjustment post 2 to correct the picture. Use an E4 inverted hex to adjust the post.

7. If the picture is high or low, use adjustment post 1 to correct the picture.

8. If the picture is shifted to the left or right, use adjustment post 3 to correct.

9. If the picture is still shifted to the left or right, remove the Centering Rod and slide the assembly to correct the picture.

10. Tighten the Centering Bracket.

11. Tighten the Lock Nut on each of the adjustment post. To prevent the post from turning, place the inverted hex over each post.

12. Remove the Centering rod.

To purchase the E4 Hex socket, go to www.stanleyproto.com. Order item 6904TX.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

WIRING DIAGRAMS

OVERALL WIRING DIAGRAM
DETAIL 1 WIRING DIAGRAM
DETAIL 2 WIRING DIAGRAM
IIC BUS SIGNAL DIAGRAM

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LCoS Overall Wiring Diagram

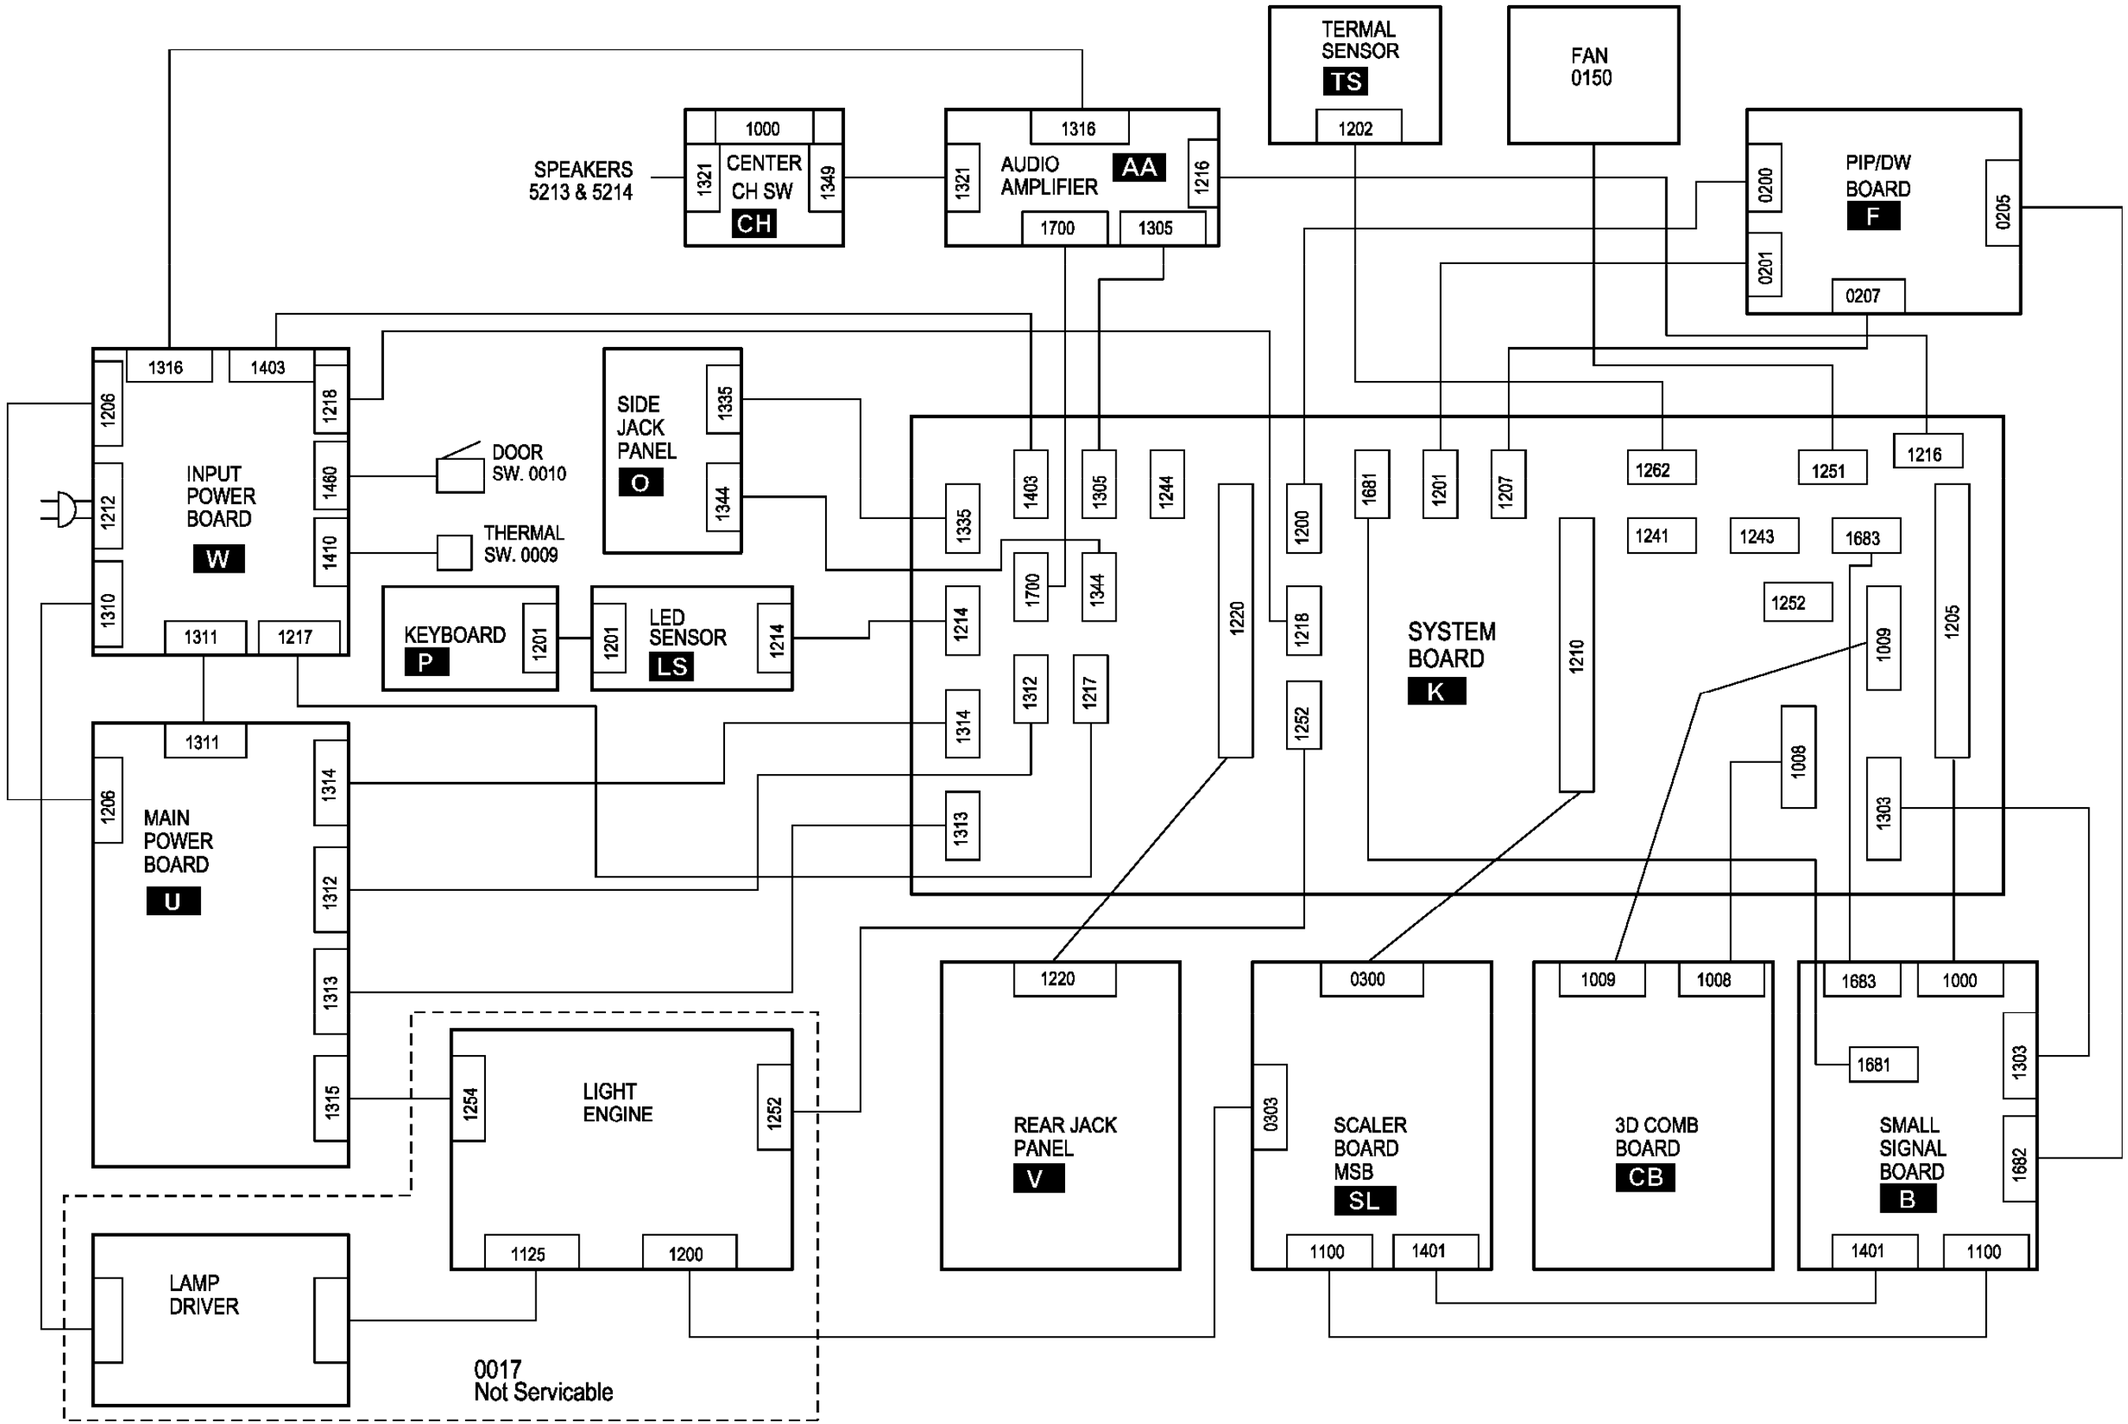

LCoS Wiring Diagram - Detail 1 (Pin to Pin)

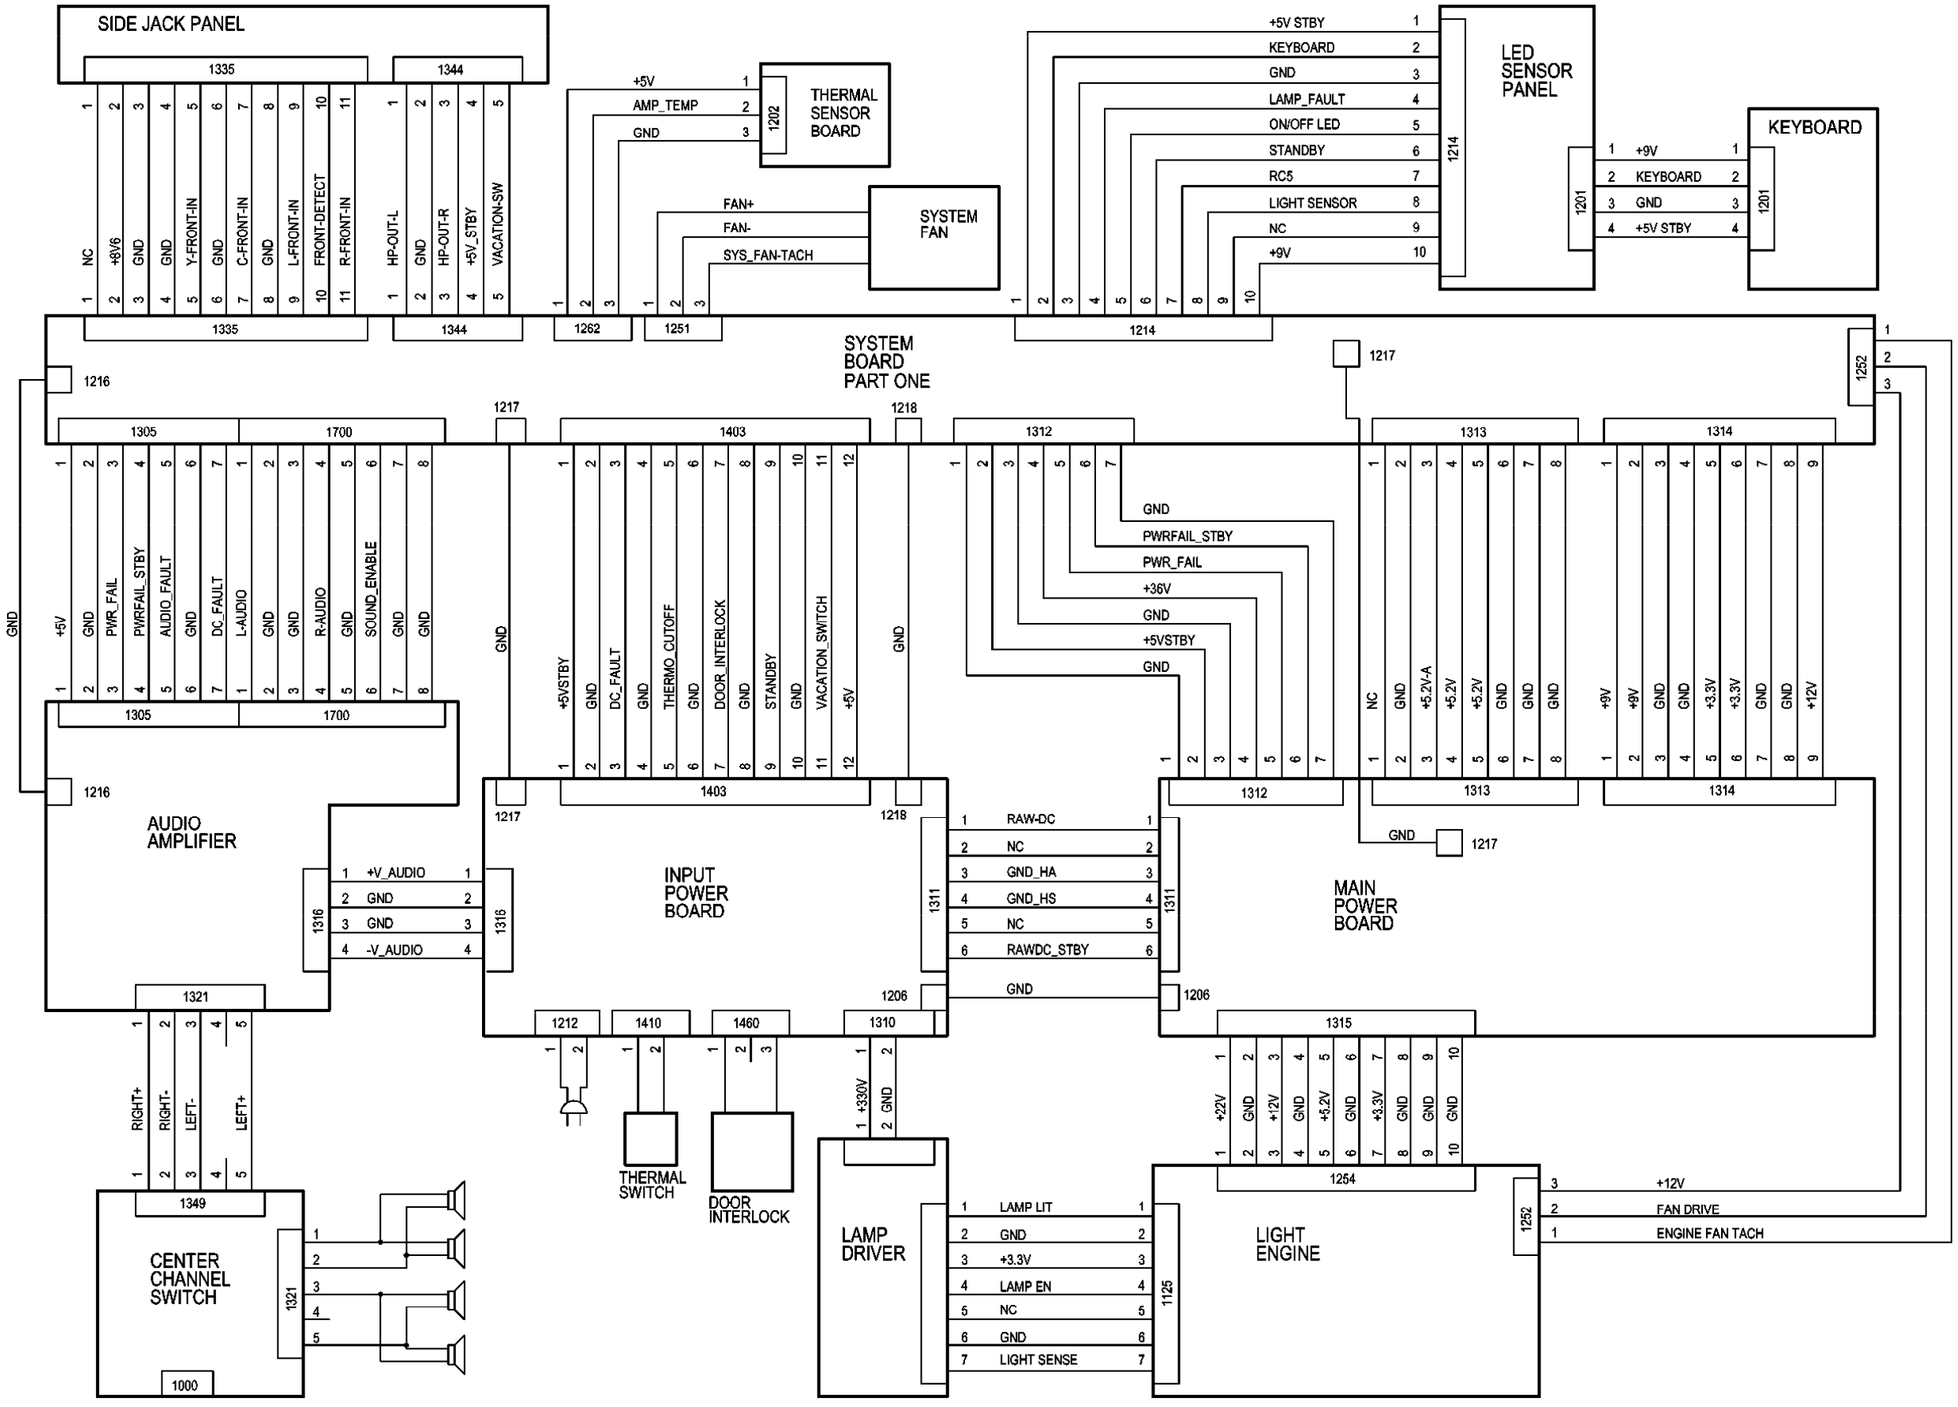

LCoS Wiring Diagram - Detail 2 (Pin to Pin)

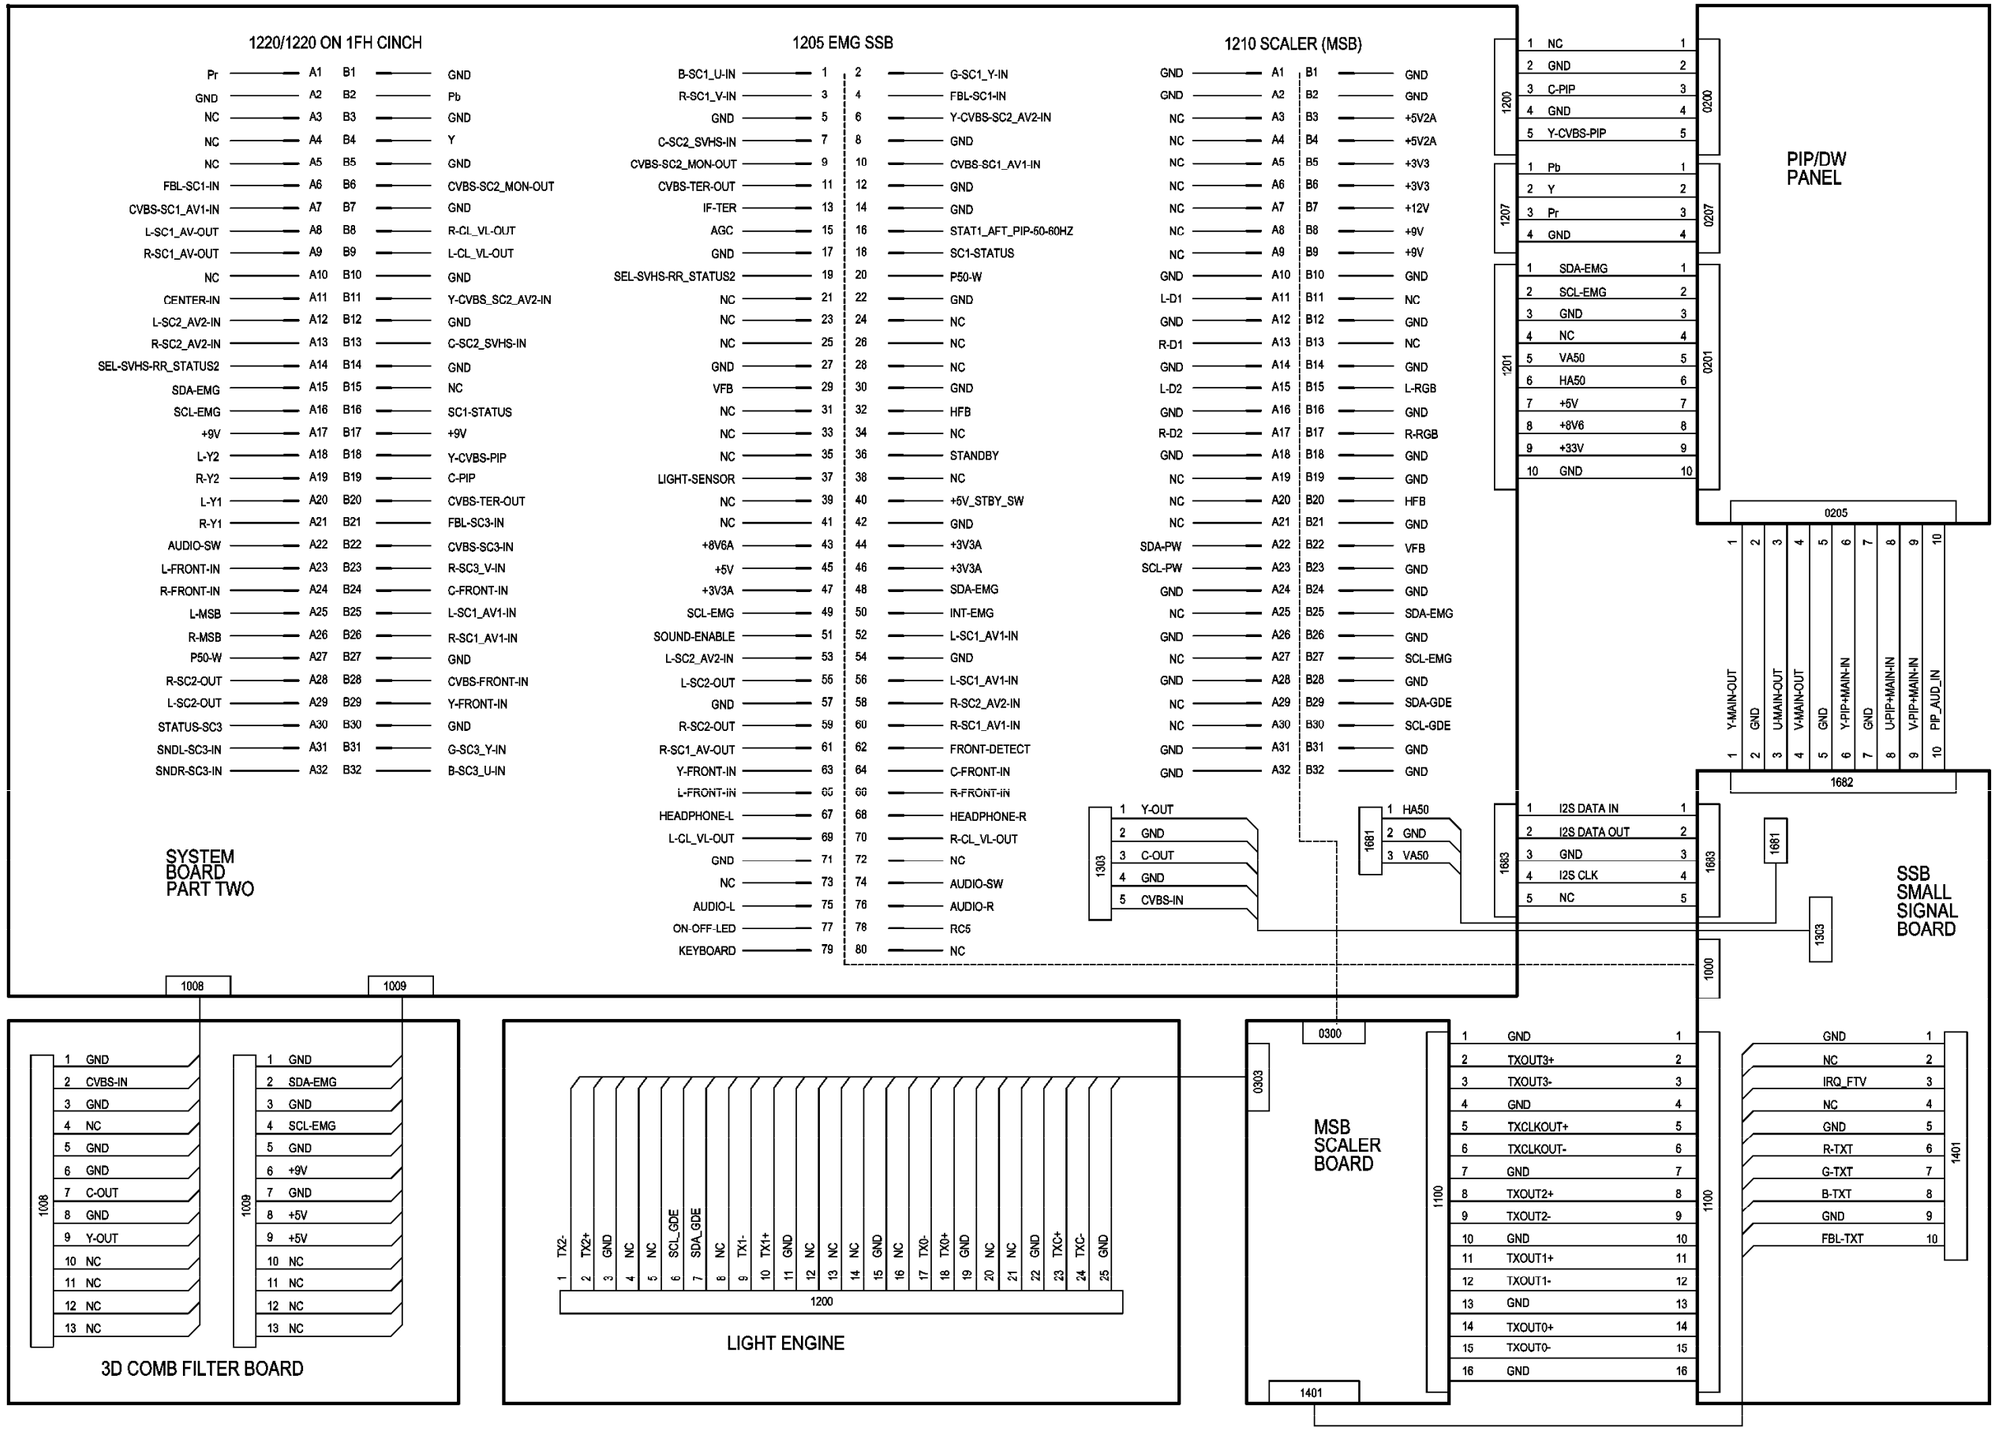

IIC BUS SIGNAL DIAGRAM

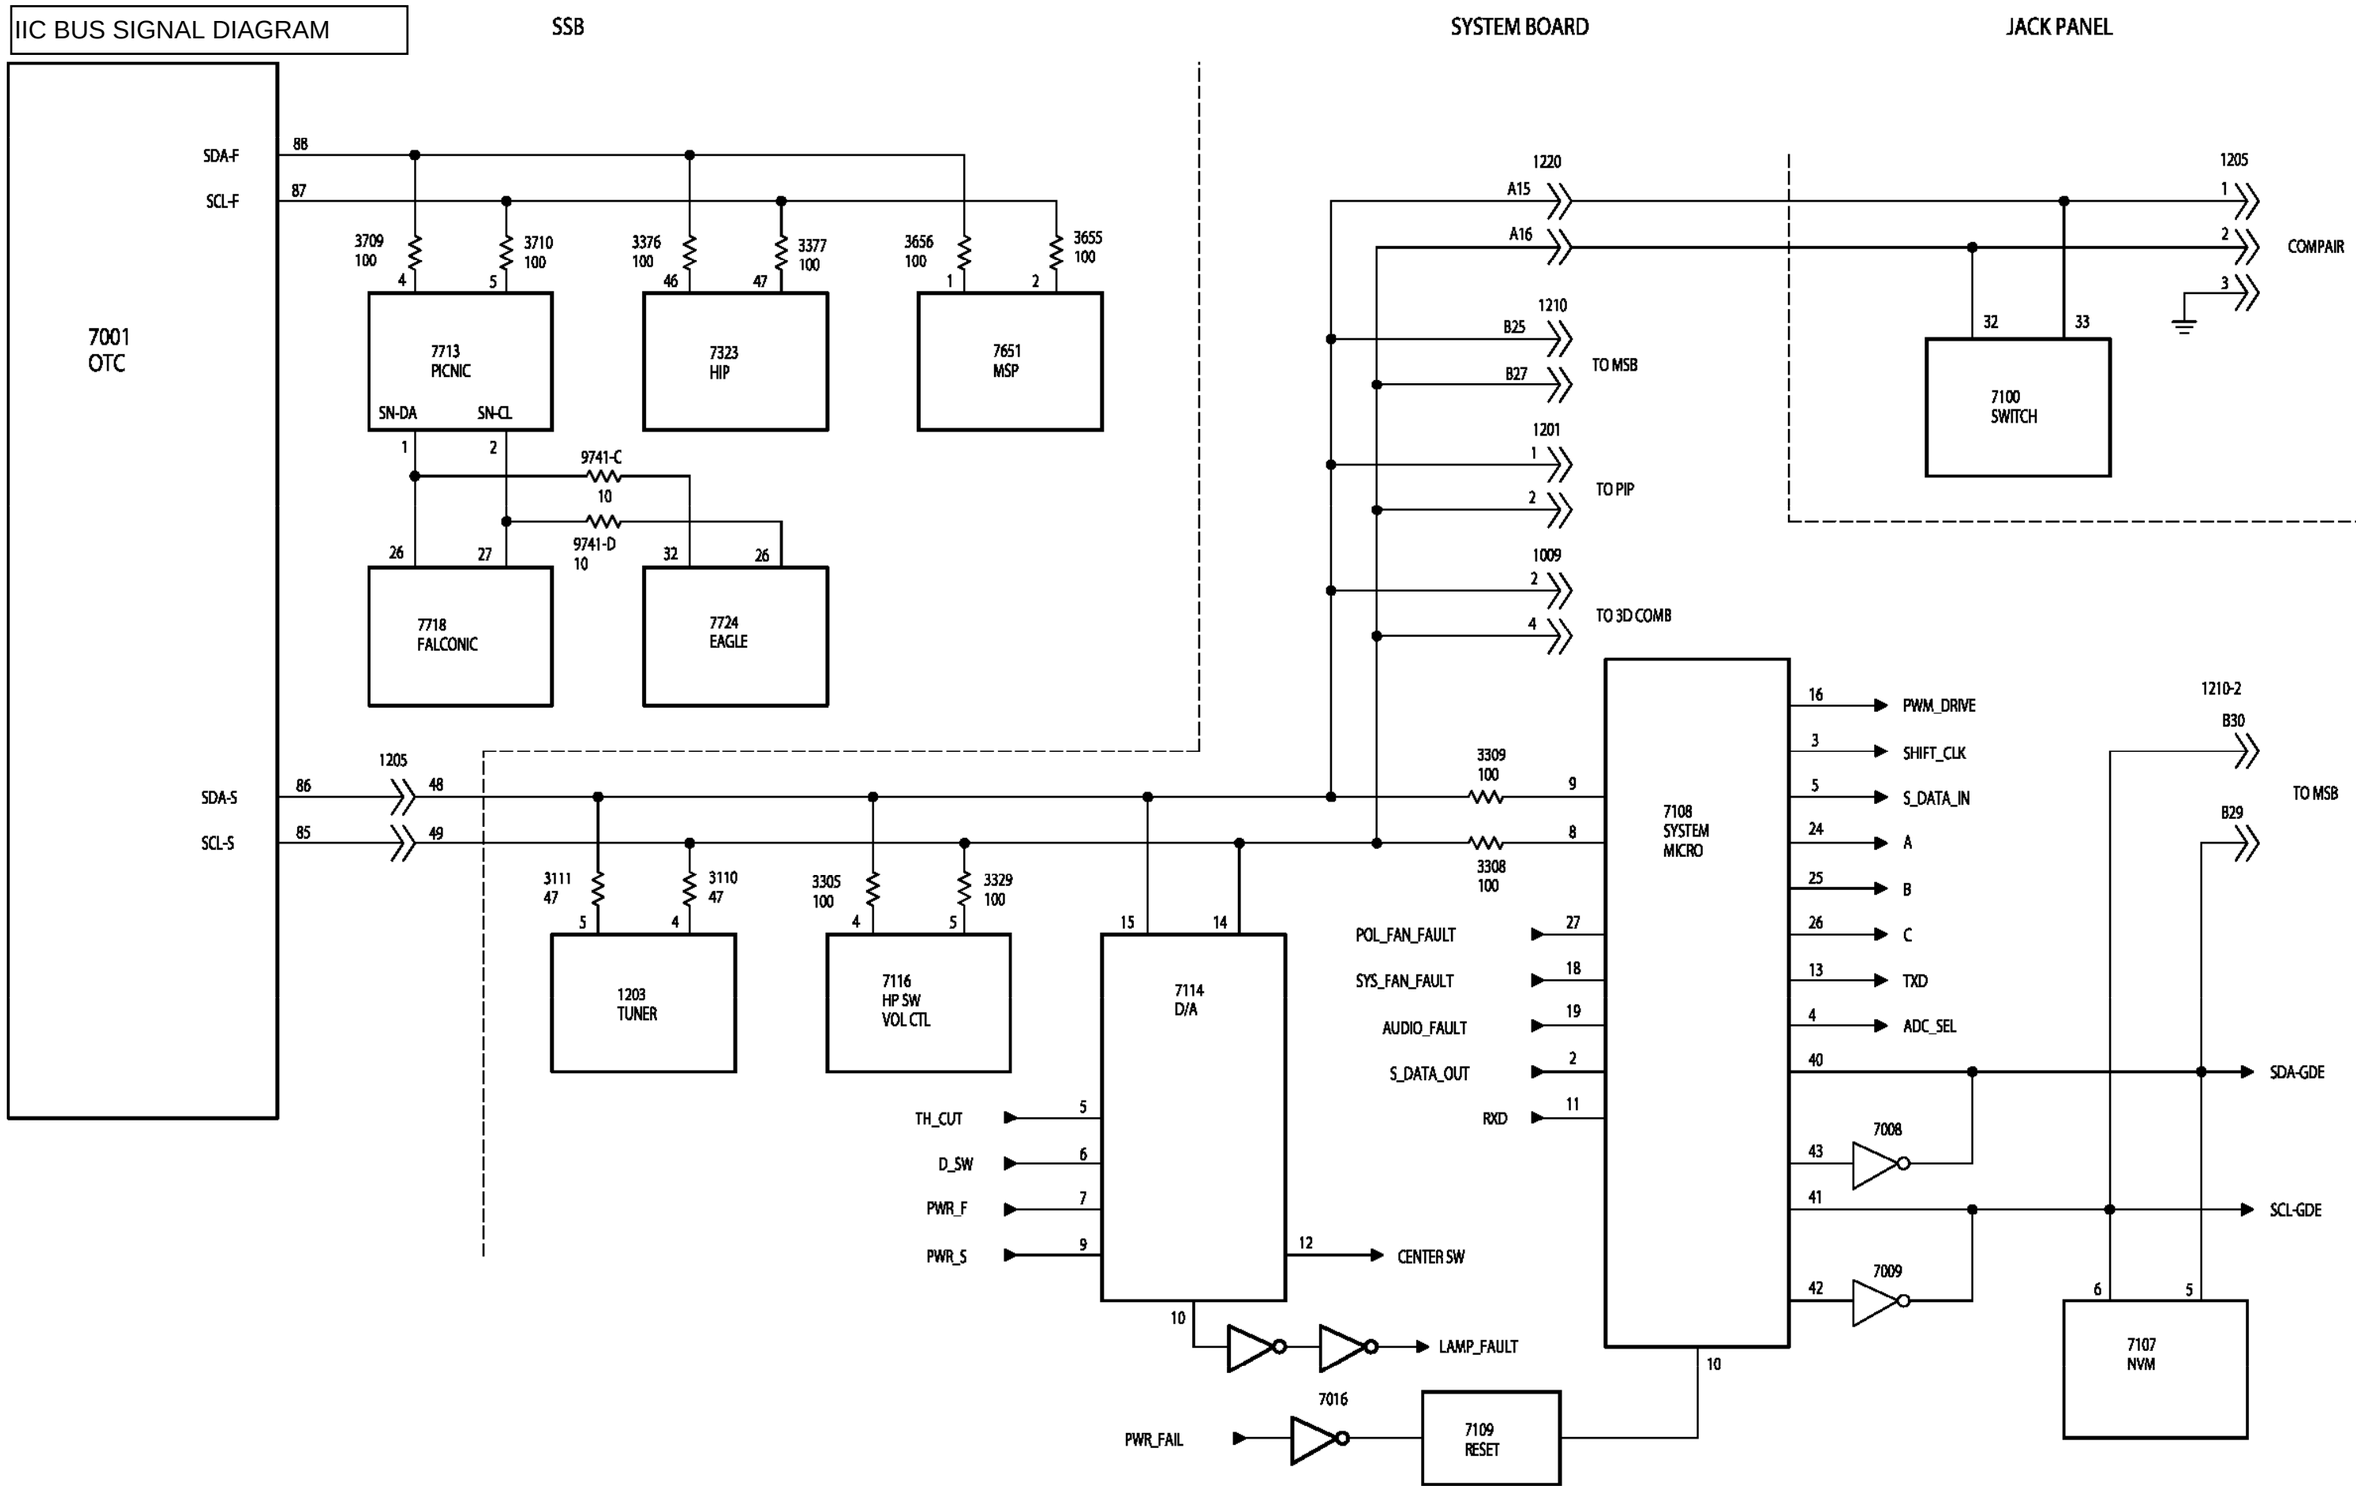

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

SCHEMATICS

[W] Input Power Panel (1 of 2)
[U] Main Power Panel
[K] System Board (1 of 4)
[B] SSB Panel (1 of 11)
[SL] Scaler Panel (1 of 13)
[F] PIP Panel, DW_Panel (1 of 6)
[CB] 3D Comb Filter Panel
[V] Rear Jack Panel (1 of 2)
[O1] Side Jack Panel
[LS] LED/Sensor Panel
[P1] LED/Keyboard Panel
[TS1] Thermal Sensor Panel
[AA1] Audio Amplifier Panel
[CH] Center Channel Switch Panel

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

W 1 INPUT POWER PANEL (1 OF 2)

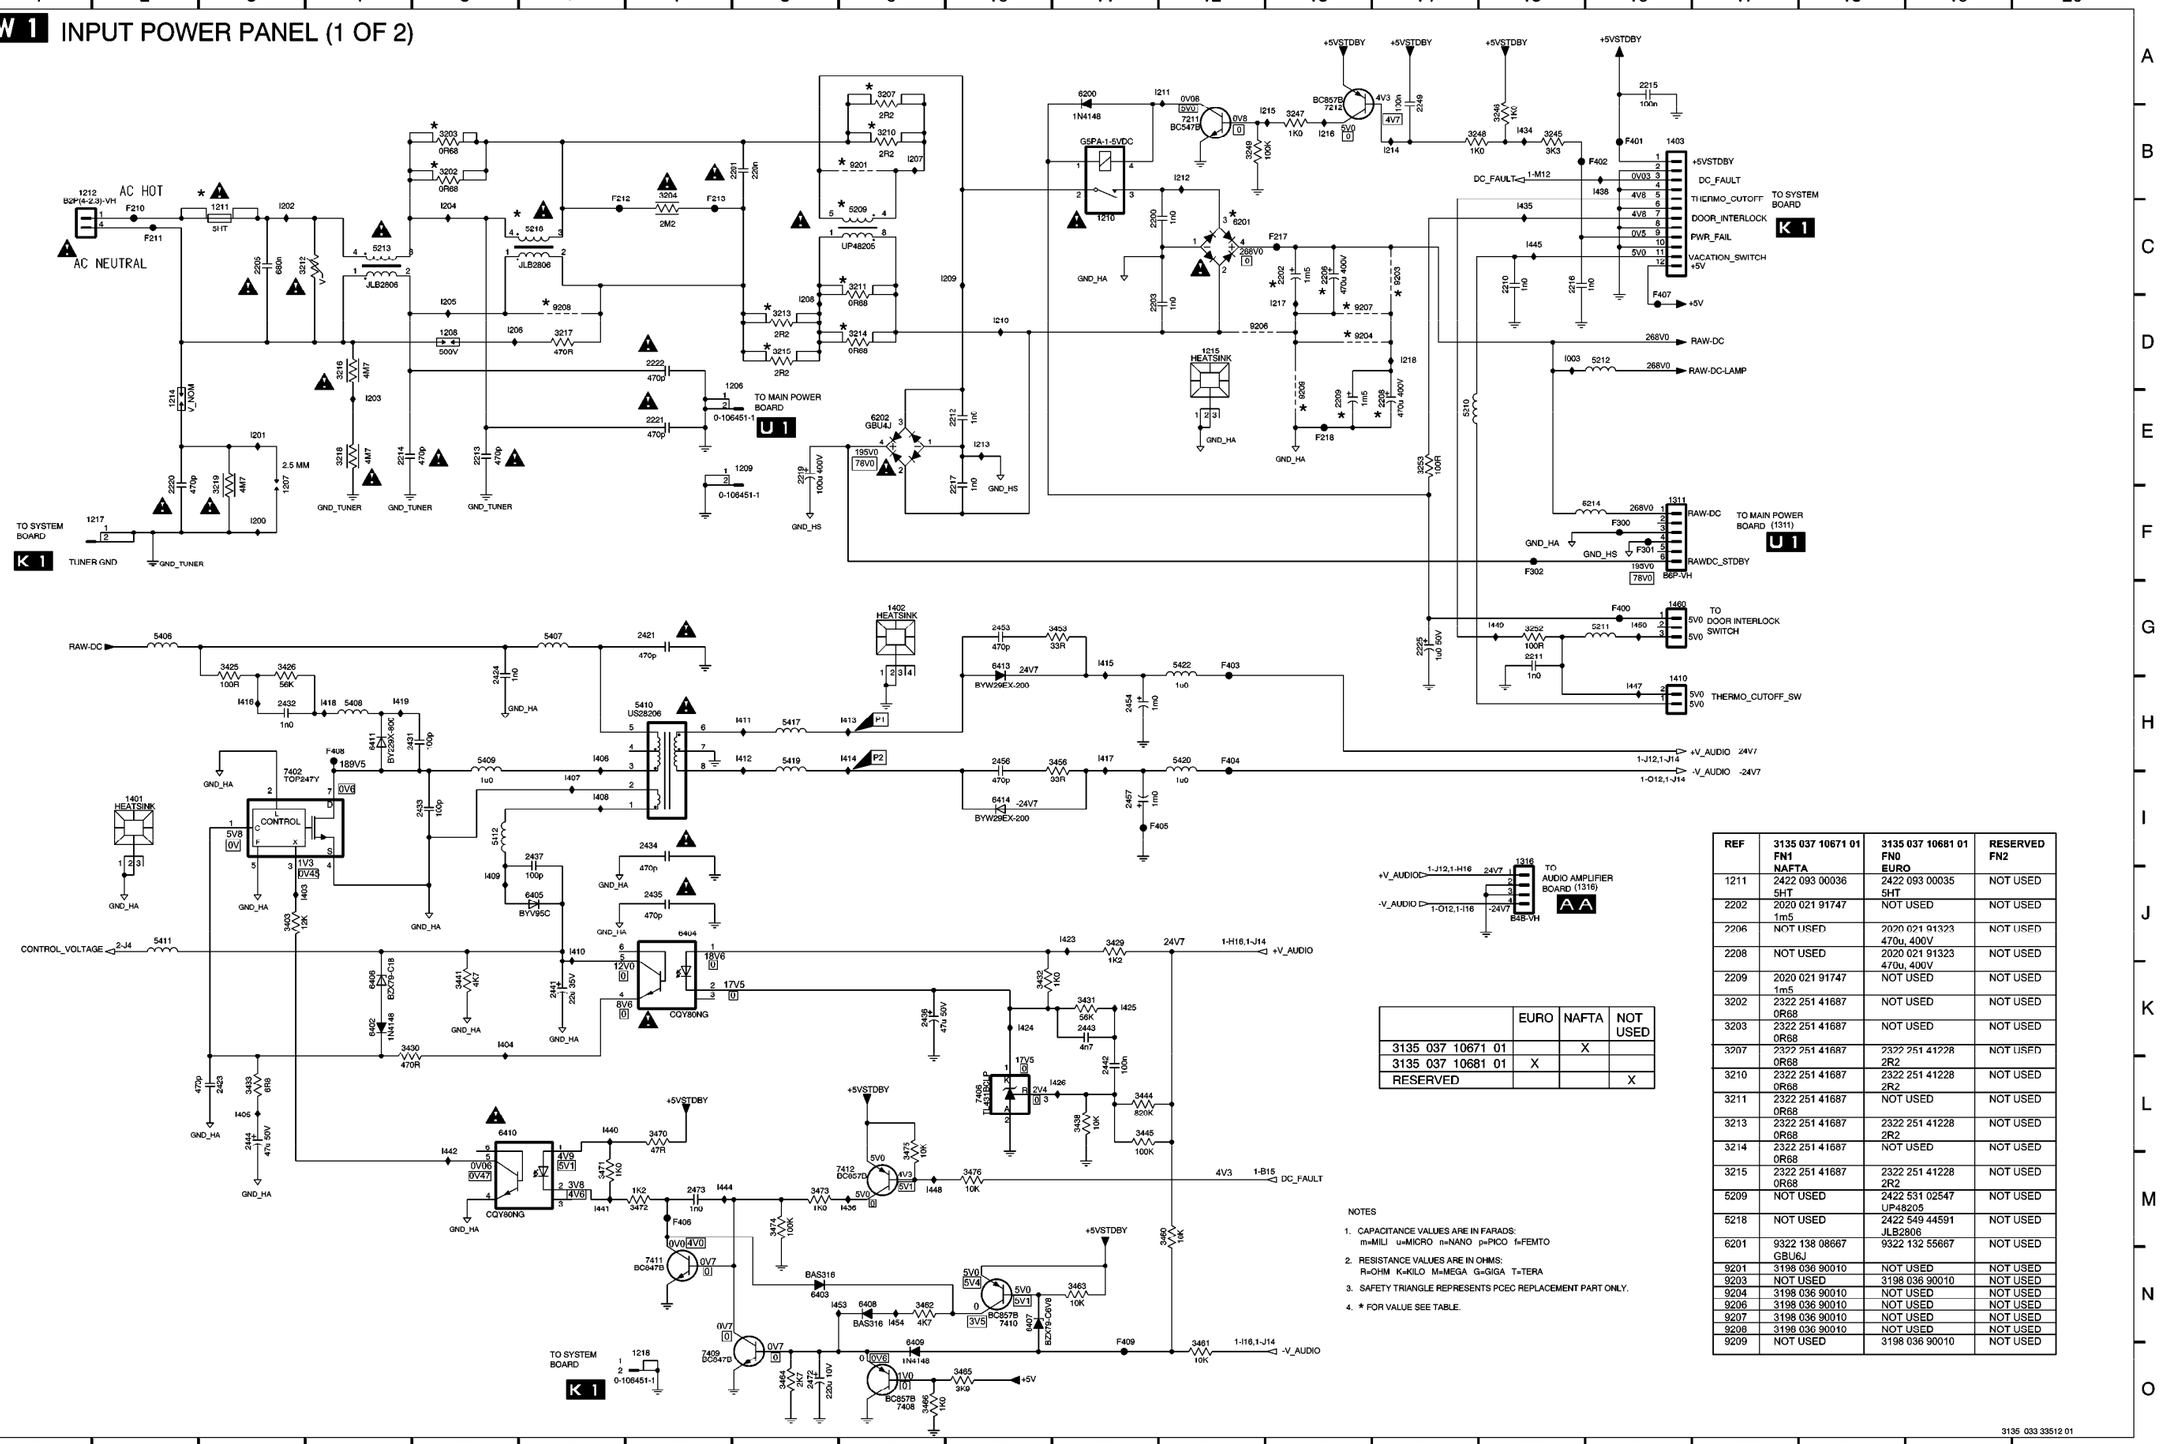

REF	3135 037 10671 01 FN1 NAFTA	3135 037 10681 01 FN0 EURO	RESERVED FN2
1211	2422 093 00036 5HT	2422 093 00035 5HT	NOT USED
2202	2020 021 91747 1m5	NOT USED	NOT USED
2206	NOT USED	2020 021 91323 470u, 400V	NOT USED
2208	NOT USED	2020 021 91323 470u, 400V	NOT USED
2209	2020 021 91747 1m5	NOT USED	NOT USED
3202	2322 251 41687 0R68	NOT USED	NOT USED
3203	2322 251 41687 0R68	NOT USED	NOT USED
3207	2322 251 41687 0R68	2322 251 41228 2R2	NOT USED
3210	2322 251 41687 0R68	2322 251 41228 2R2	NOT USED
3211	2322 251 41687 0R68	NOT USED	NOT USED
3213	2322 251 41687 0R68	2322 251 41228 2R2	NOT USED
3214	2322 251 41687 0R68	NOT USED	NOT USED
3215	2322 251 41687 0R68	2322 251 41228 2R2	NOT USED
5209	NOT USED	2422 531 02547 UP48205	NOT USED
5218	NOT USED	2422 549 44591 JLB2806	NOT USED
6201	9322 138 08667 GBU6J	9322 132 55667 GBU6J	NOT USED
9201	3196 036 90010	NOT USED	NOT USED
9203	NOT USED	3198 036 90010	NOT USED
9204	3198 036 90010	NOT USED	NOT USED
9206	3198 036 90010	NOT USED	NOT USED
9207	3198 036 90010	NOT USED	NOT USED
9208	3198 036 90010	NOT USED	NOT USED
9209	NOT USED	3198 036 90010	NOT USED

	EURO	NAFTA	NOT USED
3135 037 10671 01		X	
3135 037 10681 01	X		
RESERVED			X

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.

3135 033 33512.01

1206	E 7	6403	N 8
1207	F 3	6404	J 7
1208	D 5	6405	J 6
1209	E 8	6406	K 4
1210	C 11	6407	N 10
1211	C 3	6408	N 9
1212	C 2	6409	N 9
1214	E 2	6410	L 5
1215	D 12	6411	H 4
1217	F 2	6413	G 10
1218	N 7	6414	I 10
1311	F 16	7211	B 12
1316	I 15	7212	B 13
1401	I 2	7402	I 3
1402	G 9	7406	L 10
1403	B 16	7408	O 9
1410	H 16	7409	N 8
1400	G 16	7410	N 10
2200	C 11	7411	M 7
2201	B 7	7412	M 9
2202	D 12	9201	B 9
2203	D 11	9203	D 14
2205	C 3	9204	D 13
2206	D 13	9206	D 12
2208	E 13	9207	D 13
2209	E 13	9208	D 6
2210	D 15	9209	E 13
2211	G 15		
2212	E 9		
2213	E 5		
2214	E 4		
2215	B 16		
2216	D 15		
2217	F 9		
2219	F 8		
2220	F 2		
2221	E 7		
2222	D 7		
2225	G 14		
2249	B 14		
2421	G 7		
2423	L 3		
2424	H 5		
2431	H 5		
2432	H 3		
2433	I 5		
2434	I 7		
2435	J 7		
2436	K 9		
2437	I 6		
2441	K 6		
2442	L 11		
2443	K 11		
2444	L 3		
2453	G 10		
2454	H 11		
2456	H 10		
2457	I 11		
2472	O 8		
2473	M 7		
3202	B 5		
3203	B 5		
3204	C 7		
3207	B 9		
3210	B 9		
3211	D 9		
3212	C 4		
3213	D 8		
3214	D 9		
3215	D 8		
3216	E 4		
3217	D 6		
3218	E 4		
3219	F 3		
3245	B 15		
3246	B 14		
3247	B 13		
3248	B 14		
3249	B 12		
3252	G 15		
3253	E 14		
3403	J 3		
3425	G 3		
3426	G 3		
3429	J 11		
3430	K 4		
3431	K 11		
3432	K 10		
3433	L 3		
3438	L 11		
3441	K 5		
3444	L 11		
3445	L 11		
3453	G 10		
3456	H 10		
3460	M 11		
3461	N 12		
3462	N 9		
3463	N 11		
3464	O 8		
3465	O 10		
3466	O 9		
3470	L 7		
3471	M 6		
3472	M 7		
3473	M 8		
3474	M 8		
3475	L 9		
3476	M 10		
5209	C 9		
5210	E 14		
5211	G 15		
5212	D 15		
5213	C 4		
5214	F 15		
5218	G 6		
5400	G 2		
5407	G 6		
5408	H 4		
5409	H 5		
5410	H 7		
5411	J 2		
5412	I 5		
5417	H 8		
5419	H 8		
5420	H 12		
5422	G 12		
6200	D 11		
6201	C 12		
6202	E 9		
6402	K 4		

W 2

INPUT POWER PANEL (2 OF 2)

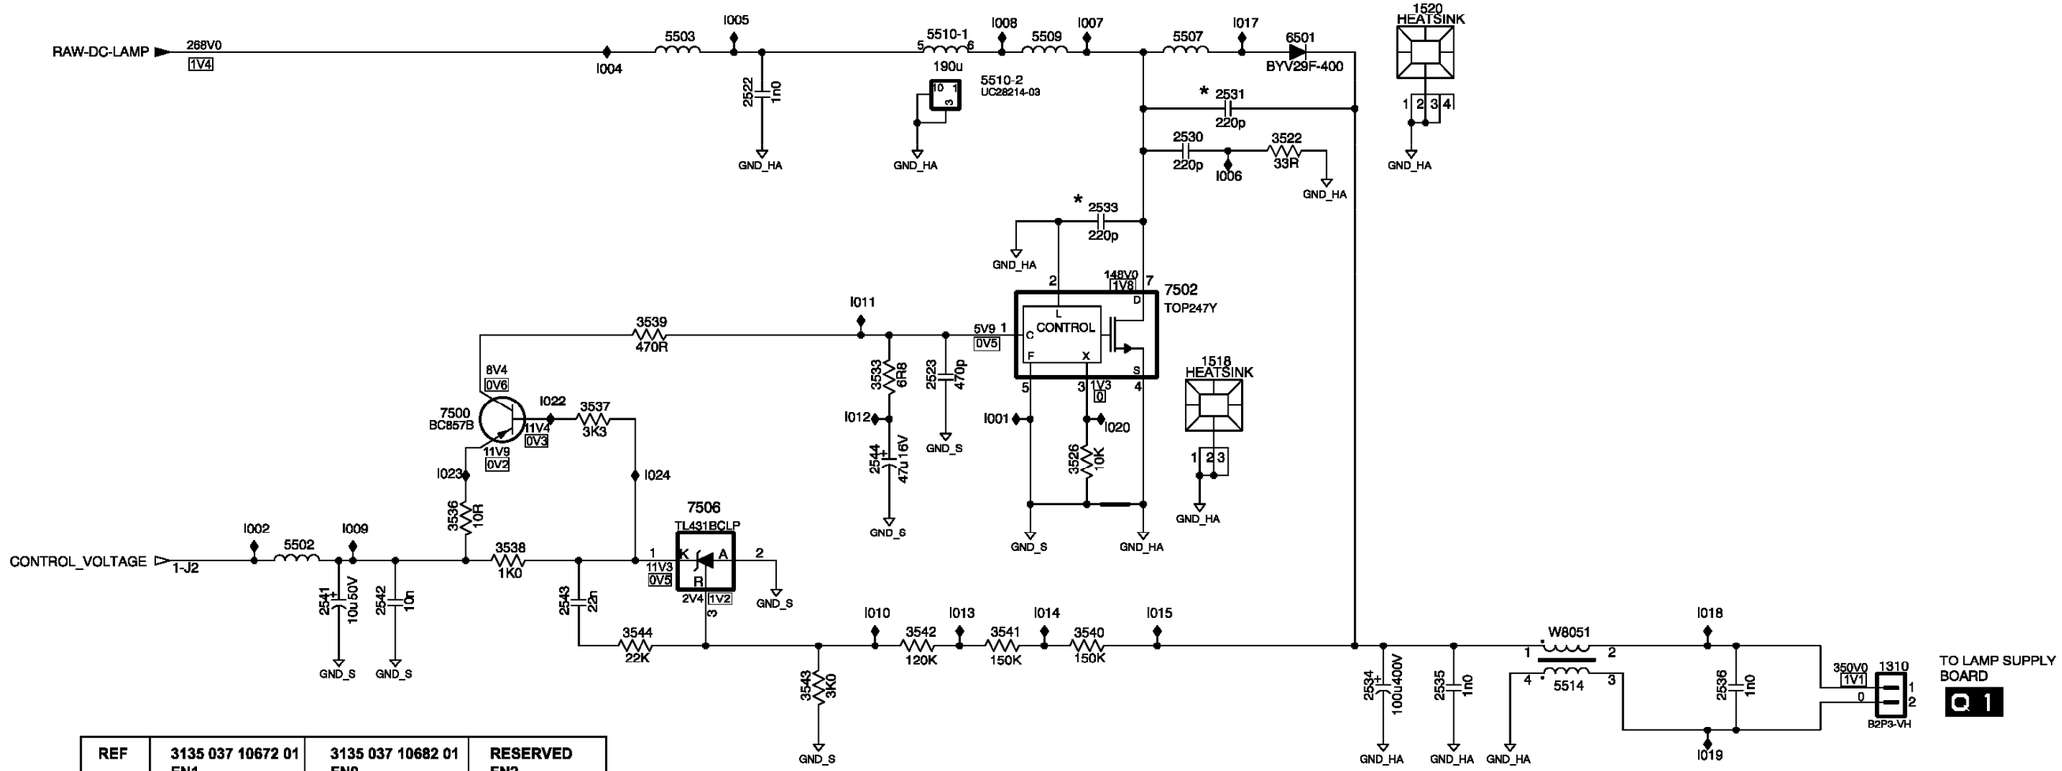

REF	3135 037 10672 01 FN1 NAFTA	3135 037 10682 01 FN0 EURO	RESERVED FN2
2531	NOT USED	NOT USED	3198 019 62210 220p
2533	NOT USED	NOT USED	3198 019 62210 220p

3135 033 33512 01

1310 F 13
1518 D 9
1520 B 10
2522 B 6
2523 D 7
2530 C 9
2531 B 9
2533 C 8
2534 F 10
2535 F 10
2536 F 12
2541 F 3
2542 F 4
2543 F 5
2544 E 7
3522 C 9
3526 E 8
3533 D 7
3536 E 4
3537 D 5
3538 E 4
3539 D 5
3540 F 8
3541 F 7
3542 F 7
3543 F 6
3544 F 5
5502 E 3
5503 B 5
5507 B 9
5510-2 B 7
5509 B 8
5510-1 B 7
5514 F 11
6501 B 9
7500 E 4
7502 D 8
7506 E 6

U 1 LCOS MAIN POWER BOARD

	ALL COMMON	NOT USED
3135_037_10863_01	X	
RESERVED		X

Ref Des	3135_037_10863_01	RESERVED
2224	NOT USED	319801951010 100p
2225	NOT USED	202001293458 1m0
2229	NOT USED	319801964710 470p
2231	NOT USED	202002191411 1m0
2334	NOT USED	202005490169 470p
2359	NOT USED	319801941010 100p
3220	NOT USED	319801102230 22K
5207	NOT USED	242253595363 10u
6203	NOT USED	934038000127 BY229X-200
9300	NOT USED	319803890319

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ⋆ FOR VALUE SEE TABLE.

3135 033 32955 2003-09-26

K 1 LCoS SYSTEM BOARD (1 OF 4)

REAR JACK PANEL

V 1

1fH CINCH

1220-1 ROW_A / 1220-2 ROW_B

MT1 MT2 52479-0540 / 62479-0540

O 1 SIDE JACK 1335 B11B-EH-A

O 1 SIDE JACK 1344 B5B-EH-A

O 1 SIDE JACK 1337 0-106451-1

C 3 PIP MOD 1200 B5B-EH-A

I T V 1245 95003-0961

L S 1 LED SENSOR 1214 B10B-EH-A

C 4 PIP MOD 1207 B4B-EH-A

S L 6 SCALER (MSB) 1210-1 ROW_A / 1210-2 ROW_B

C B 1 3D COMB 1008 09JL-BT-E

C B 1 3D COMB 1009 09JL-BT-E

B 1 EMG*SSB

Note: See SSB Schematic B1 for Voltages and Waveforms for Connector 1205

1205-A ROW_A / 1205-B ROW_B

87613-8001 AUDIO_GND

U 1 MAIN POWER 1313 B8P-VH

C 3 PIP MOD 1201 B10B-EH-A

U 1 MAIN POWER 1314 B8P-VH

W 1 INPUT POWER 1403 B12B-EH-A

TUNER

TUNER_GND

1203 UV1316-MK3

B 2 EMG* 3D COMB 1303 B5B-PH-K

B 5 EMG* SCART3 1402 B5B-PH-K

B 6 EMG* SCART3 1650 B6B-PH-K

B 6 EMG* 1681 B3B-PH-K

B 6 EMG* AUDIO DELAY 1683 05FMN-BTK-A

U 1 MAIN POWER 1312 B7B-EH-A

A A 1 AUDIO AMPLIFIER 1305 B7B-PH-K

A A 1 AUDIO AMPLIFIER 1700 B8B-EH-A

W 1 INPUT POWER 1217 0-106451-1

W 1 INPUT POWER 1218 0-106451-1

A A 1 AUDIO AMPLIFIER 1216 106957

P 1 KEYBOARD 1215 0-106451-1

I I C 1244 B3B-EH-A

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ★ FOR VALUE SEE TABLE.

3135 033 32996

K 2 LCoS SYSTEM BOARD (2 OF 4)

3135 033 32996

K 3

LCoS_SYSTEM_BOARD (3 OF 4)

D 1 2

LIGHTENGINE

1252 BM06B-SRSS-TBT

7118 NE555D

7111 NE555D

7116 TDA7309D-TR

7117 TDA1308

7113 TEA6422

T S 1

THERMAL SENSOR

1262 B3B-PH-K

1961 B4B-PH-K

7110 TLC0832CD

1251 B3B-EH-A

SYSTEM FAN

7121 BSN20

7120 BSN20

3135 033 32998

K 4 LCoS SYSTEM BOARD (4 OF 4)

VACATION_SW
1-C17,1-B2,1-E16,1-K18
F130
3362 100R
5107
2342 470p
3325 2K2
THERMO_CUTOFF
1-K18
5110
2347 470p
3310 2K2
DOOR_INTERLOCK
1-K18
F131
3373 100R
5111
2348 470p
3324 2K2
PWR_FAIL
2-J8,1-N13,1-M17
5112
3394 1K0
2346 470p
PWRFAIL_STDBY
2-J8,1-M17,1-N13
5113
3396 1K0
2350 470p
+5V_STDBY
3370 56K
3372 2K2
3371 10K
6300 BAS316
LAMP_FAULT
1-F18
7021 BC847B
4127
3375 15K
3378 39K
F141
7020 BC847B
6301 BAS316

7114 PCF8574T
LP FILTER
INTERRUPT LOGIC
I/O PORTS
BIT 8
SHIFT REGISTER
BUS C²I CONTROL
INPUT FILTER
POWER-ON RESET
INT 13
A0 1
A1 2
A2 3
SCL 14
SDA 15
VDD 16
VSS 8
P0 4
P1 5
P2 6
P3 7
P4 9
P5 10
P6 11
P7 12
VAC_SW I288
TH_CUT I283
D_SW I284
PWR_F I287
PWR_S I289
2118 100n
I293
I294
I295
4107
4108
4105
F122
4124
3381 10K
3389 10K
3386 10K
3387 10K
3383 4K7
3384 4K7
F121
1-I11
INT-EMG
7018 BC847B
3328 10K
3-M9,2-F18,1-I17,1-H4,1-L5,1-O11,1-I7,#2
SCL-EMG
3-L9,2-F18,1-G18,1-H4,1-L5,1-O11,#3
SDA-EMG

+9V
7112 74HC4053D 16
VDD MDX
4X1 4X2
VEE VSS
4119
4120
2400 10u 16V
2401 10u 16V
2402 10u 16V
2403 22n
2348 100n
AUDIO-L 1-K7
CENTER-IN 1-C8
AUDIO-R 1-K11
I138
3400 150R
3401 22K
3402 22K
3403 22K
3408 56K
3409 56K
3410 56K
AUDIO_GND
3404 22K
3405 22K
3411 56K
3412 56K
3458 10R
3457 10R
2404 220u 16V
2405 220u 16V
7026 BC847B
7027 BC847B
2406 16V 100u
2407 16V 100u
3413 100R
3414 100R
3415 75R
3416 75R
3417 75R
3418 75R
1-M19 L
1-N19 R
2408 22n
2409 22n

3135 033 32996

B 1 SIM CONNECTOR (MALE)

B 1

v1 G3	v6 G3	v11 G5	v16 G5	v21 G6	v26 G7	v31 G8	v38 G10	v43 G11	v48 G11	v53 G12	v58 G13	v63 G14	0002 C1	0007 D1	0012 E2	2902 G14	2907 G5	2912 G2	5904 F2	5914 F14	5920 F5	9902 F3	9907 F4	9912 G3	9917 G4	9922 G5	9928 G6	9934 G5	9939 F12	9945 G6	9950 G7	9955 G8	9962 G7
v2 G3	v7 G4	v12 G5	v17 G6	v22 G6	v27 G7	v32 G8	v39 G10	v44 G11	v49 G12	v54 G12	v59 G13	v64 G14	0003 C1	0008 D2	0013 E2	2903 G14	2908 G1	5900 F1	5910 F14	5915 F8	6926 G6	9903 F3	9908 F4	9913 G3	9918 G2	9923 G5	9929 G7	9935 F8	9940 G11	9946 G6	9951 G7	9958 G6	9963 G7
v3 G3	v8 G4	v13 G5	v18 G6	v23 G7	v28 G7	v35 G9	v40 G10	v45 G11	v50 G12	v55 G12	v60 G13	v65 G8	0004 C2	0009 E1	1000 H2	2904 G10	2909 G1	5901 F1	5911 F14	5917 F10	6956 G6	9904 F3	9909 F3	9914 G3	9919 F5	9924 G5	9930 G5	9936 G8	9941 G11	9947 G6	9952 G7	9959 G6	9964 G7
v4 G3	v9 G4	v14 G5	v19 G6	v24 G7	v29 G8	v36 G9	v41 G10	v46 G11	v51 G12	v56 G13	v61 G13	v71 G12	0005 D1	0010 E1	2900 G14	2905 G8	2910 G1	5902 F2	5912 F9	5918 F9	6957 G6	9905 F3	9910 G3	9915 G4	9920 F5	9925 G6	9931 G6	9937 F11	9942 G12	9948 G7	9953 G8	9960 G7	9965 G8
v5 G3	v10 G4	v15 G5	v20 G6	v25 G7	v30 G8	v37 G10	v42 G10	v47 G11	v52 G12	v57 G13	v62 G14	0001 C1	0006 D1	0011 E1	2901 G13	2906 G9	2911 G2	5903 F2	5913 F13	5919 F10	9901 F3	9906 F4	9911 G3	9916 G4	9921 F5	9927 F5	9932 G7	9938 F11	9944 G6	9949 G7	9954 G8	9961 G7	9966 G8

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

A B C D E F G H

0001 SOLDERLAND 0002 SOLDERLAND 0003 SOLDERLAND 0004 SOLDERLAND

0005 SOLDERLAND 0006 SOLDERLAND 0007 SOLDERLAND 0008 SOLDERLAND

0009 SLOT 1.2x3.2 0010 SLOT 1.2x3.2 0011 SLOT 1.2x3.2 0012 SLOT 1.2x3.2 0013 SLOT 1.2x3.2

2908 100n 2909 100n 2910 100n 2911 100n 2912 100n

5900 5901 5902 5903 5904

+5V +5V +5V +8V +8V

+5V_CON +5V_VDP +5V_AUD +8V_AUD +8V_VDP

B5-63 P50 SCT-STATUS

B5-141 STANDBY

B5-152 IRQ-DIGITAL P-P-MONO

B5-88 SDA-F B5-89 SCL-F B5-90 SDA-S B5-91 SCL-S B5-92 FOR B5-93 SOUND-ENABLE

+3V3_SIM

B6-94 L-SC1_AV1-IN B6-95 L-SC2_AV2-IN B6-96 L-SC2-OUT B6-97 L-SC1_AV-OUT B6-98 R-SC2_AV2-IN B6-99 R-SC2-OUT B6-100 R-SC1_AV1-IN B6-101 R-SC1_AV-OUT B5-102 FRONT-DETECT

B6-105 L-FRONT-IN B6-106 R-FRONT-IN B6-107 HEADPHONE-L B6-108 HEADPHONE-R B5-109 L-CL_VI-OUT B6-110 R-CL_VI-OUT B6-111 GND-AUD B6-112 AUDIO-SL B6-113 AUDIO-C B6-114 AUDIO-SW B6-115 AUDIO-L B6-116 AUDIO-F

B5-116 ON-OFF-LED B5- RC B5-117 KEYBOARD B5-118 DEGAUSSING

B4-64 CUTOFF B4-65 GND-RGB-CRT B4-66 B-CRT B4-67 G-CRT B4-68 R-CRT B4-69 LINEDRIVE1 B4-70,B4-75 GND-LINEDRIVE B4-71 FRAMEDRIVE+ FRAMEDRIVE- B4-72 EW-DRIVE B4-73 HFB_X-RAY-PROT B4-74,B4-139,B4-140 EHT-INFO B4-76 DYN-FASE-COR B4-77 TILT B4-78 LIGHT-SENSOR B4-79 IRC-DIGITAL B4-152 IRQ-DIGITAL B4-155 Y-SCAVEM

B4-84 SDA-F B4-85 SCL-F B4-86 SDA-F B4-87 SCL-F B4-88 SDA-F B4-89 SCL-F

B3-82 SDA-F B3-83 SCL-F

B2-80 SDA-F B2-81 SCL-F

B2-50 B-SC1-IN_U-IN B2-51 G-SC1-IN_Y-IN B2-52 R-SC1_V-IN B2-53 FBL-SC1-IN B2-54 Y-CVBS-SC2_AV2-IN B2-55 C-SC2_SVHS-IN B2-56 CVBS-SC2_MON-OUT B2-57 CVBS-SC1_AV1-IN B2-58 CVBS-TER-OUT B2-59 IF-TER B2-60 AGC B2-150 CVBS-PIP_TUNI-2-CVBS-IN B2-61 SC1-STATJS B2-62 SEL-SVHS-IRR_STATUS2 B2-103 CVBS-FRONT-IN B2-104 C-FRONT-IN

9609 9910 9911 9912 9913 9604 9605 9606 9607 9608 9915 9916 9917 9609 9918 9919 9920 9921 9922 9923 9924 9925 9926 9927 9928 9929 9930 9931 9932 9933 9934 9935 9936 9937 9938 9939 9940 9941 9942 9943 9944 9945 9946 9947 9948 9949 9950 9951 9952 9953 9954 9955 9956 9957 9958 9959 9960 9961 9962 9963 9964 9965 9966 9967 9968 9969 9970 9971 9972 9973 9974 9975 9976 9977 9978 9979 9980 9981 9982 9983 9984 9985 9986 9987 9988 9989 9990 9991 9992 9993 9994 9995 9996 9997 9998 9999

6926 BZX384-C6V8 6956 BZX384-C6V8 6957 BZX384-C6V8

2806 100p 2807 100p 2904 100p 2905 100p 2906 100p

5915 600R 5917 600R 5918 600R 5912 600R 5919 600R

2901 100p 2902 100p 2903 100p 2300 100p

5913 600R 5914 600R 5911 600R 5910 600R

+5V2 +8V +5V

B6 AUDIO DEMODULATOR

B5 OTC

B4 VDP-HOP

B3a/b/c FEATURE-BOX

B2 VDP-HIP

TO 1205 A6 (SIM CON. FEMALE)

1000

F201 F202 F203 F204 F205 F206 F207 F208 F209 F210 F211 F212 F213 F214 F215 F216 F217 F218 F219 F220 F221 F222 F223 F224 F225 F226 F227 F228 F229 F230 F231 F232 F233 F234 F235 F236 F237 F238 F239 F240 F241 F242 F243 F244 F245 F246 F247 F248 F249 F250 F251 F252 F253 F254 F255 F256 F257 F258 F259 F260 F261 F262 F263 F264 F265 F266 F267 F268 F269 F270 F271 F272 F273 F274 F275 F276 F277 F278 F279 F280

B2 IF,I/O VIDEOPROCESSING

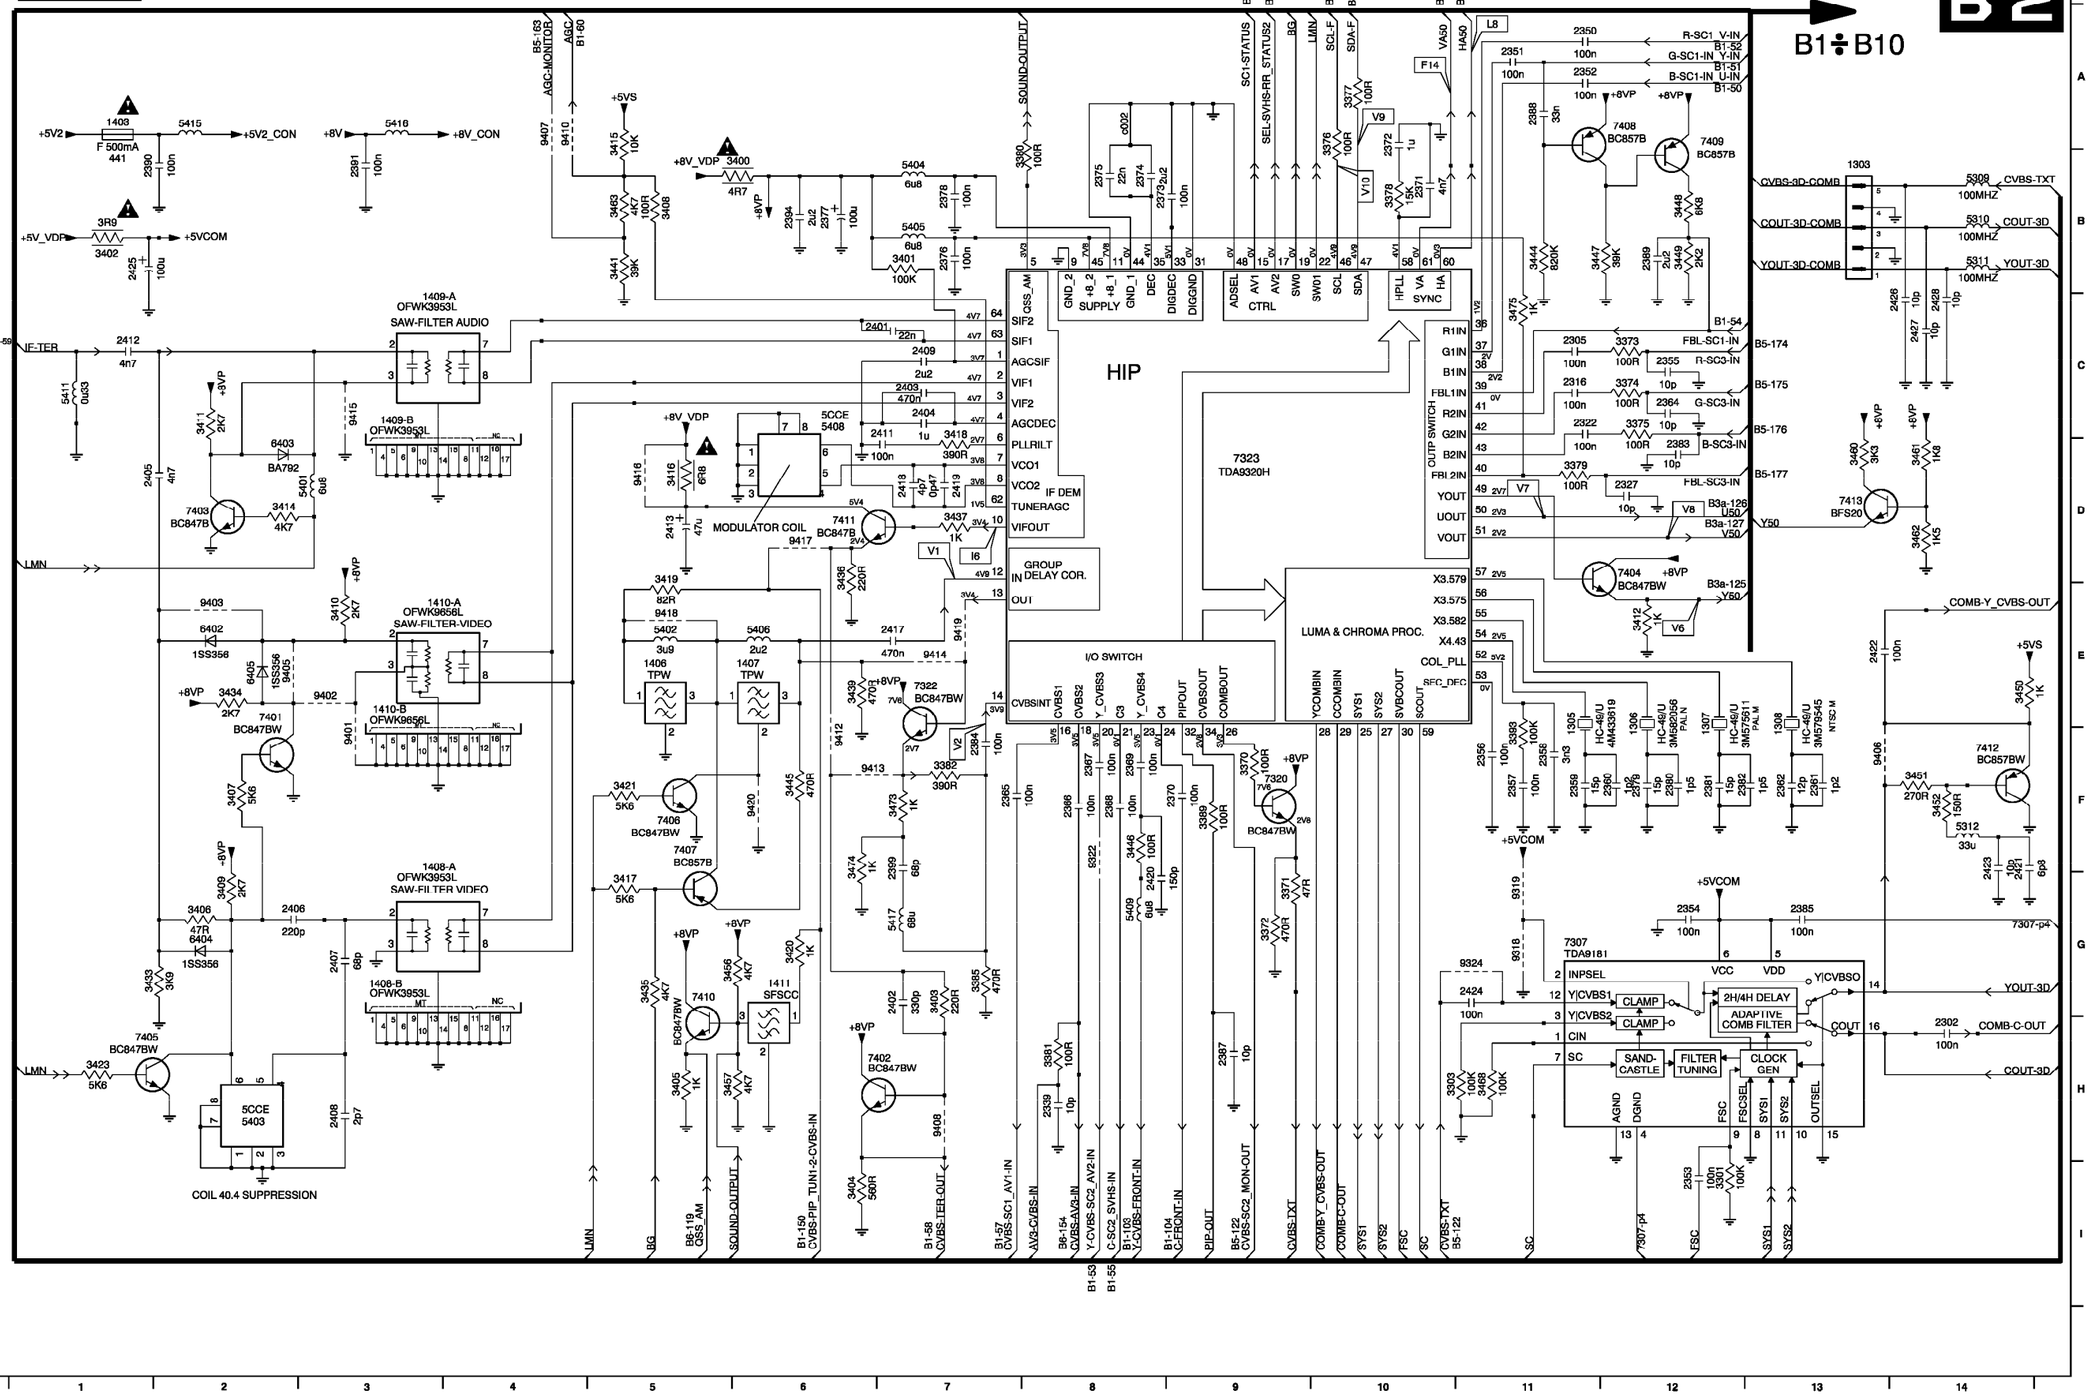

1303 B13	3412 E12
1305 E11	3414 D2
1306 E12	3415 A5
1307 E12	3416 D5
1308 E13	3417 G5
1403 A1	3418 C7
1406 E5	3419 D5
1407 E6	3420 G6
1408-A F4	3421 F5
1408-B G3	3423 H1
1409-A B4	3433 G1
1409-B C3	3434 E2
1410-A E4	3435 G5
1410-B E3	3436 D6
1411 G6	3437 D7
2302 H14	3439 E6
2305 C11	3441 B5
2316 C11	3444 B11
2322 C11	3445 F6
2327 D12	3446 F8
2339 H8	3447 B11
2350 A11	3448 B12
2351 A11	3449 B12
2352 A11	3450 E14
2353 I12	3451 F14
2354 G12	3452 F14
2355 C12	3456 G5
2356 F11	3457 H5
2357 F11	3460 D13
2358 F11	3461 D14
2359 F11	3462 D14
2360 F12	3463 B5
2361 F13	3468 H11
2362 F13	3473 F7
2364 C12	3474 F6
2365 F7	3475 C11
2366 F8	5309 B14
2367 F8	5310 B14
2368 F8	5311 B14
2369 F8	5312 F14
2370 F9	5401 D3
2371 B10	5402 E5
2372 A10	5403 I2
2373 B8	5404 B7
2374 B8	5405 B7
2375 B8	5406 E6
2376 B7	5408 C6
2377 B6	5409 G8
2378 B7	5411 C1
2379 F12	5415 A2
2380 F12	5416 A3
2381 F12	5417 G7
2382 F13	6402 E2
2383 D12	6403 D2
2384 F7	6404 G2
2385 G13	6405 E2
2387 H9	7307 G11
2388 A11	7320 F9
2389 B12	7322 E7
2390 B1	7323 D9
2391 B3	7401 E2
2394 B6	7402 H7
2399 F7	7403 D2
2401 C7	7404 D12
2402 G7	7405 H1
2403 C7	7406 F5
2404 C7	7407 F5
2405 D1	7408 A12
2406 G2	7409 A12
2407 G3	7410 G5
2408 H3	7411 D6
2409 C7	7412 F14
2411 C7	7413 D13
2412 C1	9318 G11
2413 D5	9319 G11
2417 E7	9322 F8
2418 D7	9324 G11
2419 D7	9401 F3
2420 G8	9402 E3
2421 F14	9403 E2
2422 E13	9405 E2
2423 F14	9406 F13
2424 G11	9407 A4
2425 B1	9408 H7
2426 C14	9410 A4
2427 C14	9412 F6
2428 C14	9413 F6
3301 I12	9414 E7
3303 H10	9415 C3
3370 F9	9416 D5
3371 G9	9417 D6
3372 G9	9418 E5
3373 C12	9419 E7
3374 C12	c002 A8
3375 C12	
3376 A10	
3377 A10	
3378 B10	
3379 D11	
3380 B8	
3381 H8	
3382 F7	
3383 G7	
3389 F9	
3393 F11	
3400 B6	
3401 B7	
3402 B1	
3403 G7	
3404 I6	
3405 H5	
3406 G2	
3407 F2	
3408 B5	
3409 G2	
3410 E3	
3411 C2	

B3A PICNIC

B3A

FBX SOFTWARE

PROM

7714
MS81V04160-25TB
FM1

MICRO-PROCESSOR
PSP

BACK END
PEAKING
MUX

MID END
HISTOGRAM
NOISE REDUCTION
TBC/SRC
MUX

3 X DAC

7713
PICNIC
SAA4978H

ANALOG PROCESSING

3 X ADC

FRONT END

PLL

OSC

BST

TO B3c*

TO B3c**

TO B3b

B1 ÷ B10

* SEE MAPPING I1 ON B3c

** SEE MAPPING G1 ON B3c

8204 000 81248
2003-03-27

0018 K15	3754 B5	F157 A3
0019 K15	3755 D3	F158 B3
1701 J5	3756 D4	F159 C3
1702 K5	3758 E6	F160 H6
1710 K4	3759 H5	F161 H5
2700 A2	3760 J5	F162 H4
2701 B2	3762 J12	F163 H4
2702 B2	3763 J12	F164 I4
2703 B2	3764 E9	F165 I4
2704 B2	3765 E10	F166 I4
2705 B2	5700 B2	F700 B11
2706 C2	5701 B2	F701 C11
2707 C2	5702 C2	F702 H15
2708 C2	5706 L1	F703 I15
2713 F1	5707 F2	F705 I15
2714 F2	5710 B6	F706 B5
2718 H2	5711 C6	F707 B5
2719 H2	5712 D4	F708 C5
2720 I2	5713 E4	F709 C4
2721 I2	5714 G5	F710 J5
2722 J1	5729 H15	F784 D6
2723 D1	5731 I15	F785 E6
2724 E1	5733 I15	F786 E7
2728 L2	5736 I5	F787 E6
2729 L2	5737 C11	F788 G6
2730 L3	5744 B11	
2740 H4	7703 D2	
2741 H4	7706 K2	
2742 H4	7707 C3	
2743 B4	7708 B5	
2744 B5	7709 C4	
2745 B6	7710 C5	
2746 C6	7711 B7	
2748 E5	7712 D6	
2749 E5	7713 H8	
2750 E5	7714 D15	
2751 G5	7715 G3	
2752 H5	7734 G2	
2753 I5	7736 G1	
2755 G5	9700 A5	
2756 J5	9701 F5	
2757 H5	9702 D5	
2758 K4	9703 F5	
2759 K5	9704 K5	
2760 L8	9705 K3	
2761 L9	9706 K3	
2762 J13	9707-A I12	
2763 H13	9707-B I13	
2764 E12	9707-C I13	
2765 E10	9707-D I13	
2766 E8	9708-A H12	
2767 C11	9708-B I13	
2769 D13	9708-C I13	
2773 F15	9708-D I13	
2775 F16	9709-A H12	
2777 F17	9709-B H13	
2778 F17	9709-C H13	
2779 D17	9709-D H13	
2781 C15	9710-A G12	
2823 B6	9710-B G13	
2824 C6	9710-C G13	
2831 G4	9710-D G13	
2834 G4	9711 G13	
2836 F2	9725 D3	
2870 B11	9726 E3	
2871 H15	9727 F4	
2872 H16	9728 F2	
2874 J15	9729 G2	
2877 I15	9730 B6	
2878 H16	9731 B6	
2881 I5	9732 C9	
3703 A2	9733 C6	
3704 B2	9734 E4	
3705 C2	9735 D4	
3706 A3	9736 A1	
3707 B3	9737 B1	
3708 C3	9738 C1	
3709 E2	9739 G17	
3710 E2	9760 C15	
3712 L6	9761 F15	
3713 G1	F100 A1	
3714 H1	F101 B1	
3715 I1	F102 C1	
3716 H2	F103 B2	
3717 H2	F104 D1	
3718 I2	F105 E1	
3719 F3	F108 G1	
3720 G3	F109 H1	
3721 E2	F110 I1	
3722 E2	F112 I1	
3725 I3	F114 E2	
3726 J2	F115 E2	
3727 I3	F118 H6	
3728 I2	F119 I1	
3729 D2	F120 C2	
3730 I2	F122 K5	
3731 D2	F123 K5	
3733 D2	F124 K5	
3734 E2	F125 L5	
3735 E2	F126 L5	
3736 B4	F127 L5	
3737 C4	F128 E5	
3738 C4	F129 F5	
3739 D4	F139 J13	
3741 D4	F140 J13	
3742 D4	F145 B5	
3743 D5	F147 L3	
3746 C5	F148 F13	
3747 B4	F149 G13	
3748 B4	F150 G13	
3749 C3	F151 E9	
3750 D5	F152 K6	
3751 A5	F153 F2	
3752 B5	F155 F5	
3753 B5	F156 G5	

	OKI	PHILIPS
4721	X	
4722		X
4723	X	
4724		X
4712	X	
4713		X
4714	X	
4715		X

FALCONIC
7718
SAA4992

COMPRESS
DECOMPRESS
DEINTERLACER
PIXEL PEAK
VECTORS
MOTION ESTIMATOR
LEFT MPRAM
RIGHT MPRAM
UPCONVERSION
VERTICAL PEAKING
VERTICAL ZOOM
DNR
SNERT INTER
CONTROL
BST

FB(11) FB(10) FB(09) FB(08) FB(07) FB(06) FB(05) FB(04) FB(03) FB(02) FB(01) FB(00) FB(12)
+3V3FA 2899 100n
+2V5FB +3V3FA 2802 100n 2801 100n
+2V5FB 2800 100n
FE(12) FE(00) FE(01) FE(02) FE(03) FE(04) FE(05) FE(06) FE(07) FE(08) FE(09) FE(10) FE(11)

160 159 158 157 156 155 154 153 152 151 150 149 148 147 146 145 144 143 142 141 140 139 138 137 136 135 134 133 132 131 130 129 128 127 126 125 124 123 122 121

VSS-B2 YB0 YB1 YB2 YB3 YB4 YB5 VDD-B YB6 YB7 UVB0 UVB1 UVB2 UVB3 WE-B VSS-B1 VSS-K VDD-K VDD-7 VSS-7 VSS-E2 IE-E UVE3 UVE2 UVE1 UVE0 YE7 YE6 YE5 YE4 YE3 YE2 YE1 YE0 VSS-E1

1	VSS-C1		
2	YC0	YC0	
3	YC1	YC1	
4	YC2	YC2	
5	YC3	YC3	
6	YC4	YC4	
7	YC5	YC5	
8	YC6	YC6	
9	YC7	YC7	
10	UVC0	UVC0	
11	UVC1	UVC1	
12	UVC2	UVC2	
13	UVC3	UVC3	
14	REC	RE-C	
15		VSS-C2	
16			
17		VSS-1	
18		VDD-1	
19		JUMP0	
20		JUMP1	
21			
22		VDD-2	
23		VSS-2	
24		RAMTSTL	
25	RSTR	SN-RST	
26	SN-DA	SN-DA	
27	SN-CL	SN-CL	
28		VSS-S	
29		RAMTST2	
30		TEST	
31	TRST	TRST	
32	TMS	TMS	
33	TDI	TDI	
34	TDO	TDO	
35	TCK	TCK	
36		VSS-AL	
37		UVA0	
38		UVA1	
39		UVA2	
40		UVA3	

2785 100n +3V3FA
2786 100n +2V5FB
9716
+3V3FA 3766 47K 20
9717 +3V3FA 3767 RES 47K +3V3FA 2788 100n
+2V5FB 100n 22
2787 100n 23
3782 47K 3740 1K +3V3FA
+3V3FA 3773 47K TRST
+3V3FA 3781 47K 9720 RES TMS
TDO
TDOA
+3V3FA 3783 47K
TCK +3V3FA 3774 47K

41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80

UVA4 UVA5 UVA6 UVA7 YA0 YA1 YA2 YA3 YA4 YA5 YA6 YA7 RE-A VSS-A2 VSS-3 VDD-3 VDD-4 VSS-4 VSS-FL RE-F YF7 YF6 YF5 YF4 YF3 YF2 YF1 YF0 VDD-F UVF7 UVF6 UVF5 UVF4 UVF3 UVF2 UVF1 UVF0 VSS-F2 CLK32 VSS-CLK

ME(01) ME(02) ME(03) ME(04) ME(08) ME(07) ME(08) ME(09) ME(10) ME(11) ME(12) ME(13) ME(14) ME(15) ME(16) ME(17) ME(18)
2789 100n +2V5FB
RE_F
YF(7) YF(6) YF(5) YF(4) YF(3) YF(2) YF(1) YF(0)
2790 100n +3V3FA
UVF(7) UVF(6) UVF(5) UVF(4) UVF(3) UVF(2) UVF(1) UVF(0)
CLK32

120	VSS-D2		
119	YD0	YD0	
118	YD1	YD1	
117	YD2	YD2	
116	YD3	YD3	
115	YD4	YD4	
114	YD5	YD5	
113	VDD-D		2798 100n +3V3FA
112	YD6	YD6	
111	YD7	YD7	
110	UVD0	UVD0	
109	UVD1	UVD1	
108	UVD2	UVD2	
107	UVD3	UVD3	
106	WE-D	WED	
105	VSS-DI		
104	VSS-6		
103	VDD-6		+2V5FB
102			+3V3FA 2797 100n 2796 100n
101	VDD-5		
100	VSS-5		
99	VSS-G2		
98	UVG0	UVG(0)	
97	UVG1	UVG(1)	
96	UVG2	UVG(2)	
95	UVG3	UVG(3)	
94	UVG4	UVG(4)	
93	UVG5	UVG(5)	
92	UVG6	UVG(6)	
91	UVG7	UVG(7)	
90	VDD-G		2795 100n +3V3FA
89	YG0	YG(0)	
88	YG1	YG(1)	
87	YG2	YG(2)	
86	YG3	YG(3)	
85	YG4	YG(4)	
84	YG5	YG(5)	
83	YG6	YG(6)	
82	YG7	YG(7)	
81	VSS-G1		

5716 +3V3_INT
2784 100n F782
9713 9712 RES

7717 MSM54V12222A FIELD MEMORY FM2

1	VSS1	VSS3	40
2	NC1	VCC3	39
3	DIN11	DOUT11	38 YC0
4	DIN10	DOUT10	37 YC1
5	DIN9	DOUT9	36 YC2
6	DIN8	DOUT8	35 YC3
7	DIN7	DOUT7	34 YC4
8	DIN6	DOUT6	33 YC5
9	DIN5	DOUT5	32 YC6
10	DIN4	DOUT4	31 YC7
11	DIN3	DOUT3	30 UVC0
12	DIN2	DOUT2	29 UVC1
13	DIN1	DOUT1	28 UVC2
14	DIN0	DOUT0	27 UVC3
15	SWCK	SRCK	26 CLK32FM2
16	RSTW	RSTR	25 RSTR
17	WE	RE	24 REC
18	IE	OE	23
19	NC2	VSS2	22
20	VCC1	VCC2	21

FB(11) FB(10) FB(09) FB(08) FB(07) FB(06) FB(05) FB(04) FB(03) FB(02) FB(01) FB(00) CLK32FM2 RSTR FB(12)

2780 100n 9715 9714 RES 2782 100n
CLK32 9769 CLK32FM2

FROM B3a

+3V3FA F780 5719 +3V3_FBX
2794 10u 2793 100n

+2V5FB F781 5718 +2V5B
2792 10u 2791 100n

5717 +3V3_INT
F783 2799 100n
9721 RES

7719 MSM54V12222A FIELD MEMORY FM3

1	VSS1	VSS3	40
2	NC1	VCC3	39
3	DIN11	DOUT11	38 FE(11)
4	DIN10	DOUT10	37 FE(10)
5	DIN9	DOUT9	36 FE(09)
6	DIN8	DOUT8	35 FE(08)
7	DIN7	DOUT7	34 FE(07)
8	DIN6	DOUT6	33 FE(06)
9	DIN5	DOUT5	32 FE(05)
10	DIN4	DOUT4	31 FE(04)
11	DIN3	DOUT3	30 FE(03)
12	DIN2	DOUT2	29 FE(02)
13	DIN1	DOUT1	28 FE(01)
14	DIN0	DOUT0	27 FE(00)
15	SWCK	SRCK	26 CLK32FM3
16	RSTW	RSTR	25 RSTR
17	WE	RE	24 FE(12)
18	IE	OE	23
19	NC2	VSS2	22
20	VCC1	VCC2	21

YD0 YD1 YD2 YD3 YD4 YD5 YD6 YD7 UVD0 UVD1 UVD2 UVD3 CLK32FM3 RSTR WED

9722 9723 RES
2776 100n 9724 2819 100n
CLK32 9768 CLK32FM3

8204 000 81248
2003-03-04

2776 I12
2780 I1
2782 I3
2784 E1
2785 D4
2786 E4
2787 F4
2788 E4
2789 I6
2790 I8
2791 E14
2792 E13
2793 D14
2794 D13
2795 G11
2796 E11
2797 E11
2798 C11
2799 E14
2800 B8
2801 B7
2802 B7
2819 I14
2899 B5
3740 G4
3766 E4
3767 E3
3773 G3
3774 H3
3781 G3
3782 G4
3783 H4
5716 E1
5717 E14
5718 D14
5719 C14
7717 F1
7718 C7
7719 F13
9712 F3
9713 F2
9714 I2
9715 I2
9716 E4
9717 E3
9720 G4
9721 F14
9722 F14
9723 H14
9724 I14
9768 I13
9769 I2
F780 C13
F781 D13
F782 E2
F783 E14

B3C EAGLE

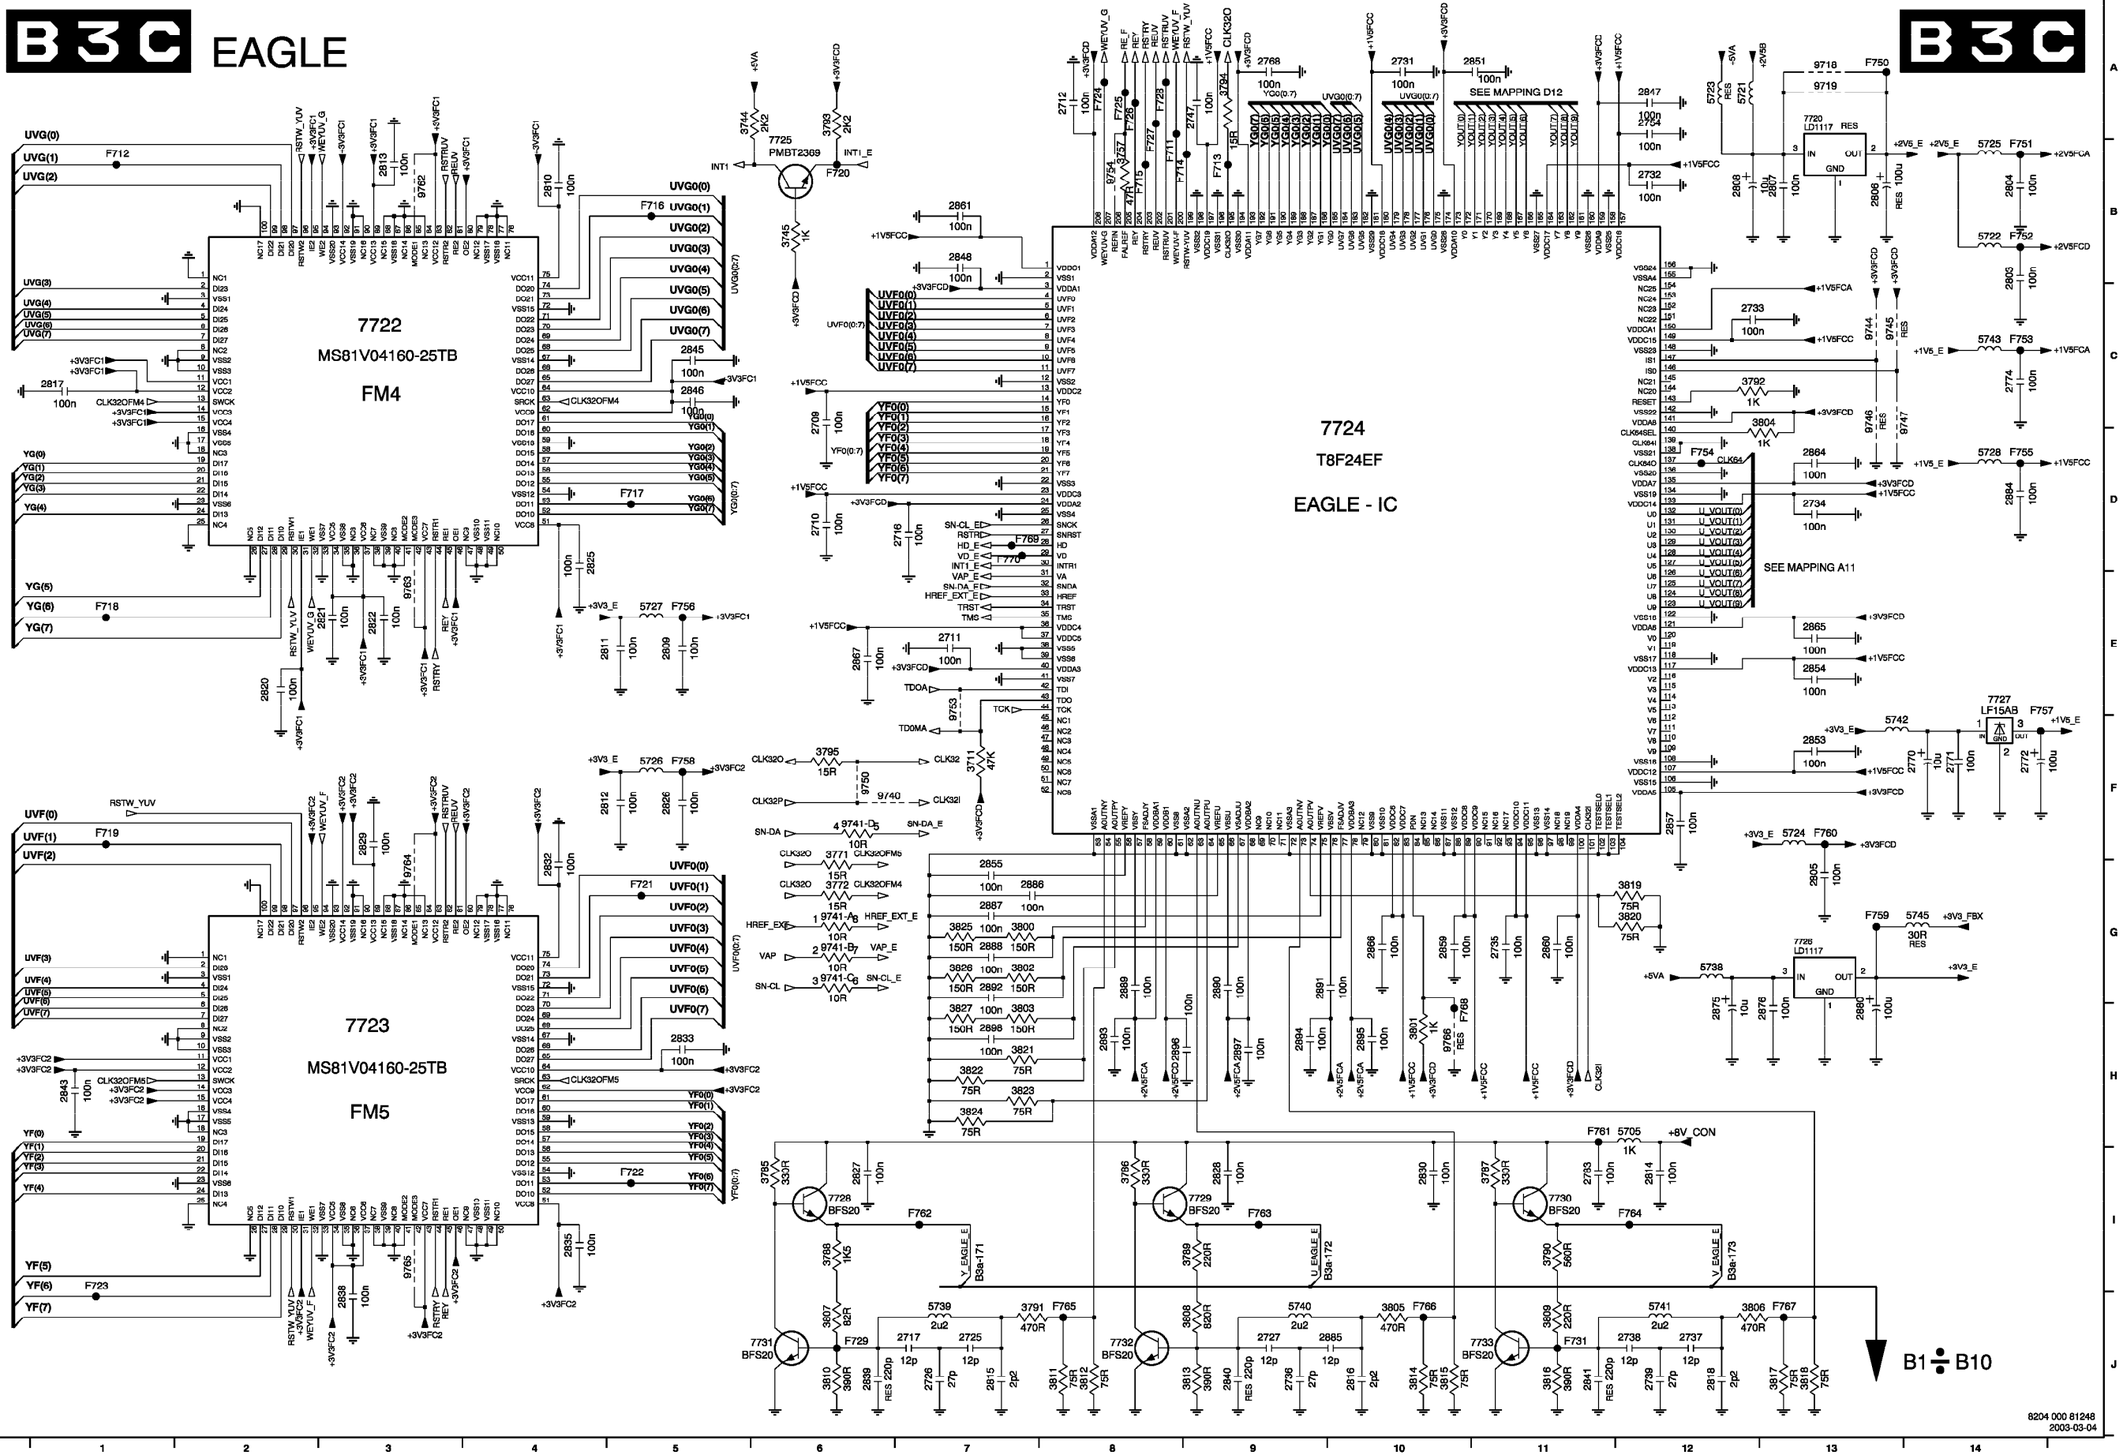

2709 C6	3795 F6	F762 I7
2710 D6	3800 G7	F763 I9
2711 E7	3801 H10	F764 I12
2712 A8	3802 G7	F765 J8
2716 D7	3803 H7	F766 J10
2717 J7	3804 C13	F767 J13
2725 J7	3805 J10	F768 H10
2726 J7	3806 J12	F769 D7
2727 J9	3807 J6	F770 D7
2731 A10	3808 J9	
2732 B12	3809 J11	
2733 C12	3810 J6	
2734 D13	3811 J8	
2735 G11	3812 J8	
2736 J9	3813 J9	
2737 J12	3814 J10	
2738 J12	3815 J10	
2739 J12	3816 J11	
2747 A9	3817 J13	
2754 A12	3818 J13	
2768 A9	3819 G12	
2770 F14	3820 G12	
2771 F14	3821 H7	
2772 F14	3822 H7	
2774 C14	3823 H7	
2783 I11	3824 H7	
2803 B14	3825 G7	
2804 B14	3826 G7	
2805 G13	3827 H7	
2806 B13	5705 H12	
2807 B13	5721 A12	
2808 B12	5722 B14	
2809 E5	5723 A12	
2810 B4	5724 F13	
2811 E5	5725 B14	
2812 F5	5726 F5	
2813 B3	5727 E5	
2814 I12	5728 D14	
2815 J7	5738 G12	
2816 J10	5739 J7	
2817 C1	5740 J9	
2818 J12	5741 J12	
2820 E2	5742 F13	
2821 E3	5743 C14	
2822 E3	5745 G14	
2825 D4	7720 A13	
2826 F5	7722 C3	
2827 I6	7723 H3	
2828 I9	7724 D10	
2829 F3	7725 B6	
2830 I10	7726 G13	
2832 G4	7727 E14	
2833 H5	7728 I6	
2835 I4	7729 I9	
2838 J3	7730 I11	
2839 J6	7731 J6	
2840 J9	7732 J8	
2841 J11	7733 J11	
2843 H1	9718 A13	
2845 C5	9719 A13	
2846 C5	9740 F6	
2847 A12	9741-A G6	
2848 B7	9741-B G6	
2851 A11	9741-C G6	
2853 F13	9741-D F6	
2854 E13	9744 C13	
2855 G7	9745 C13	
2857 F12	9746 C13	
2859 G10	9747 C13	
2860 G11	9750 F6	
2861 B7	9753 E7	
2864 D13	9754 B8	
2865 E13	9762 B3	
2866 G10	9763 E3	
2867 E6	9764 G3	
2875 H12	9765 I3	
2876 H13	9766 H10	
2880 H13	F711 B8	
2884 D14	F712 B1	
2885 J10	F713 B9	
2886 G7	F714 B8	
2887 G7	F715 B8	
2888 G7	F716 B5	
2889 G8	F717 D5	
2890 G9	F718 E1	
2891 G9	F719 F1	
2892 G7	F720 B6	
2893 H8	F721 G5	
2894 H9	F722 I5	
2895 H10	F723 I1	
2896 H8	F724 A8	
2897 H9	F725 A8	
2898 H7	F726 A8	
3711 F7	F727 B8	
3744 A5	F728 A8	
3745 B6	F729 J6	
3757 B8	F731 J11	
3771 F6	F750 A13	
3772 G6	F751 B14	
3785 I6	F752 B14	
3786 I8	F753 C14	
3787 I11	F754 D12	
3788 I6	F755 D14	
3789 I9	F756 E5	
3790 I11	F757 E14	
3791 J7	F758 F5	
3792 C12	F759 G13	
3793 A6	F760 F13	
3794 A9	F761 H11	

B 4 HOP

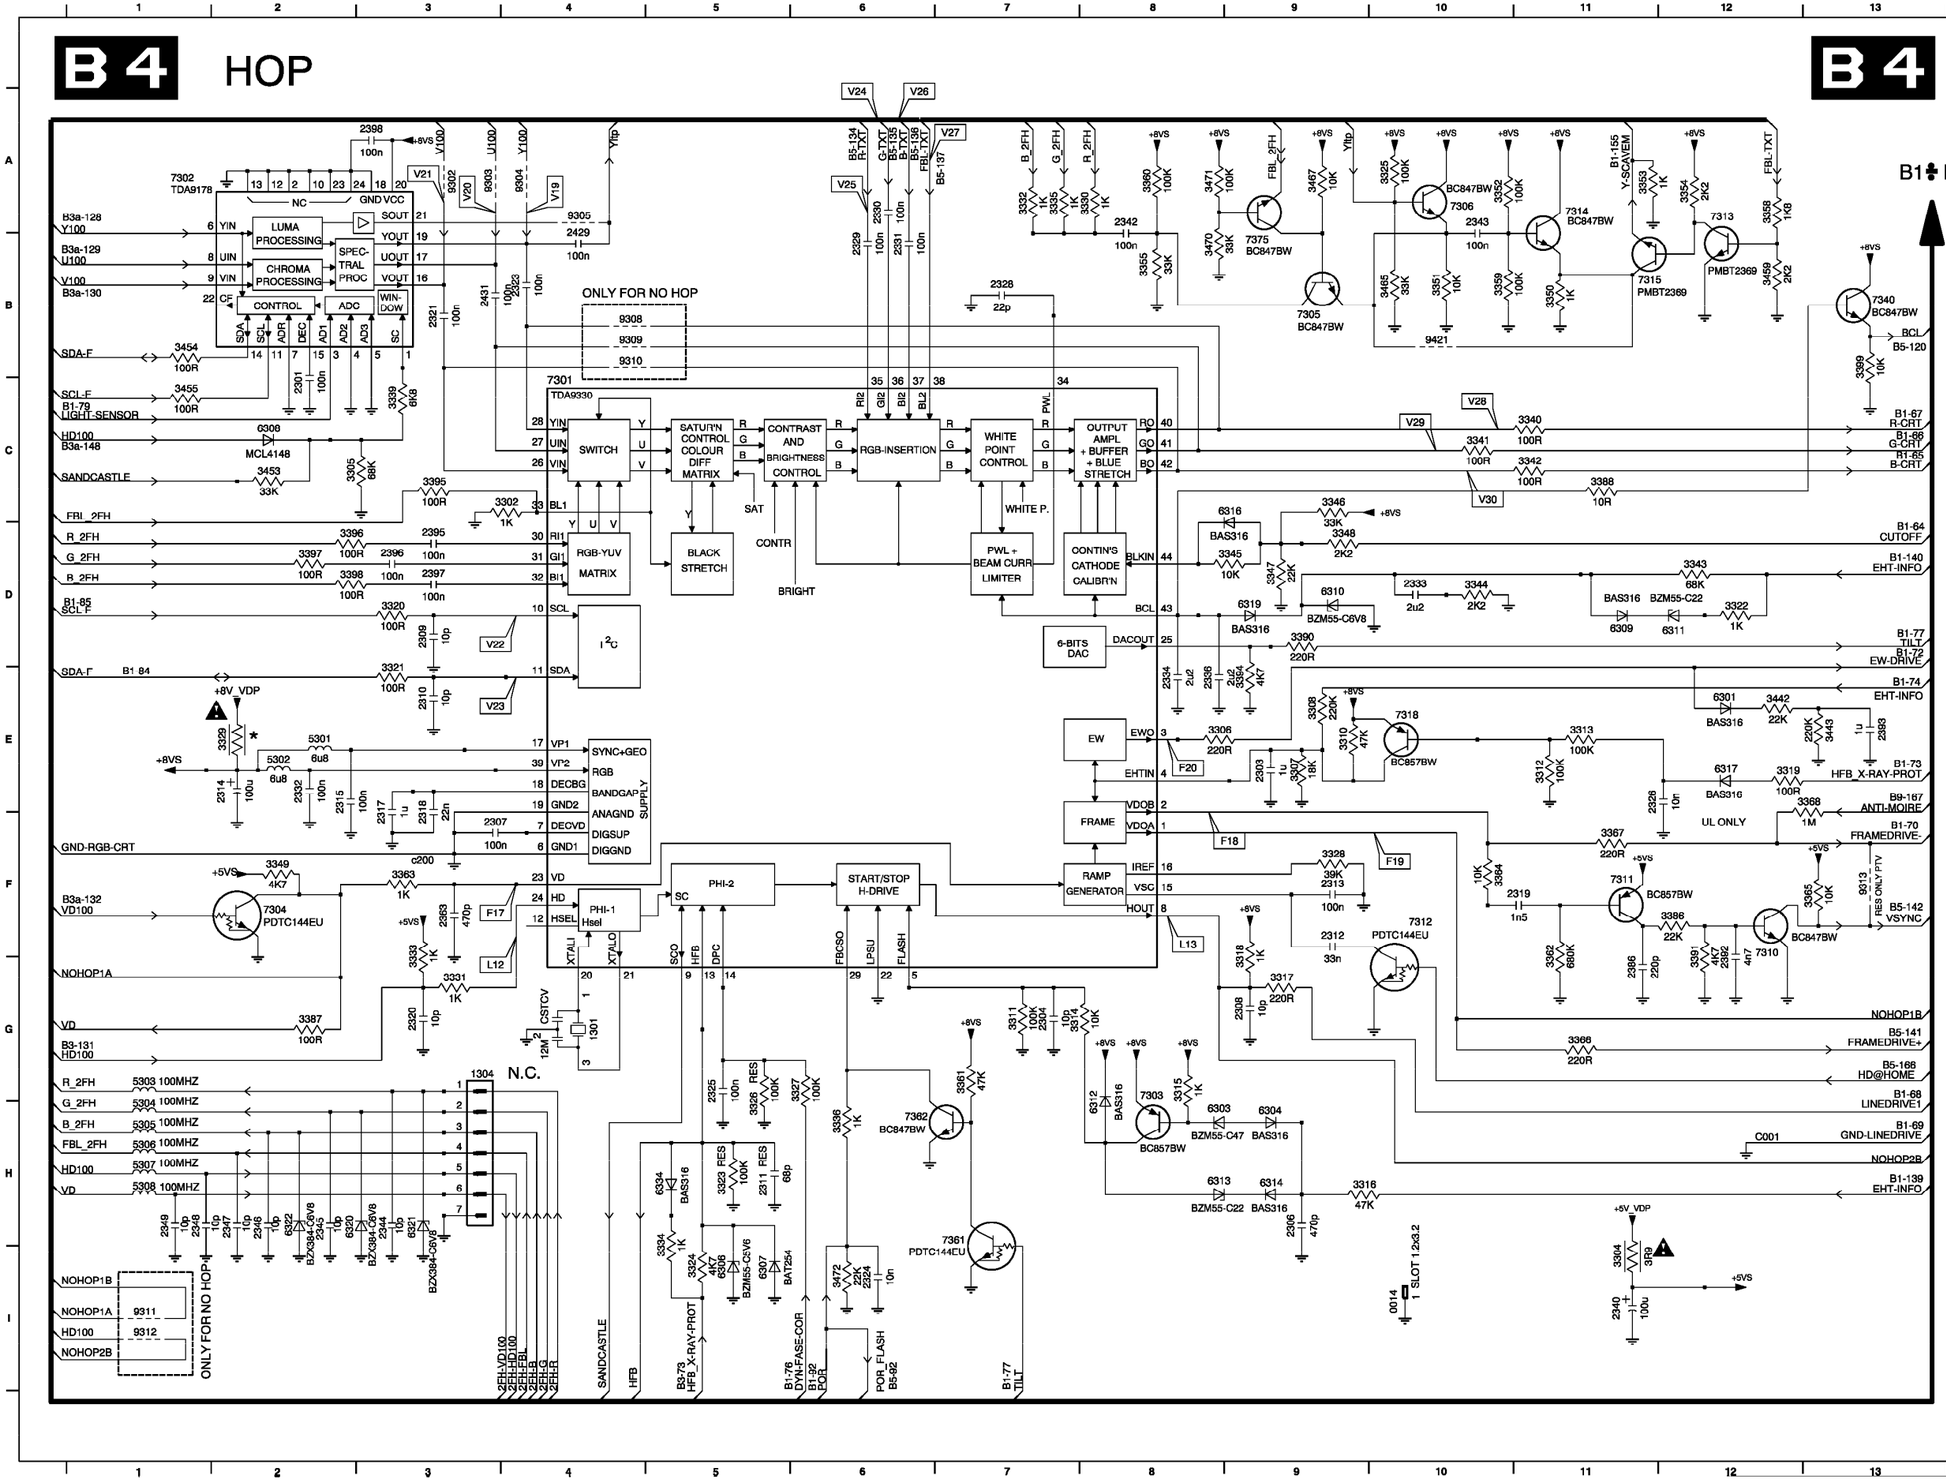

0014 I10	3348 D9	9313 F13
1301 G4	3349 F2	9421 B10
1304 G3	3350 B11	C001 H12
2301 C2	3351 B10	c200 F3
2303 E9	3352 A10	
2304 G7	3353 A11	
2306 H9	3354 A12	
2307 F3	3355 B8	
2308 G9	3358 A12	
2309 D3	3359 B10	
2310 E3	3360 A8	
2311 H5	3361 G7	
2312 F9	3362 F11	
2313 F9	3363 F3	
2314 E2	3364 F10	
2315 E2	3365 F13	
2317 F3	3366 G11	
2318 F3	3367 F11	
2319 F11	3368 E13	
2320 G3	3386 F12	
2321 B3	3387 G2	
2323 B4	3388 C11	
2324 I6	3390 D9	
2325 G5	3391 F12	
2326 E11	3394 E9	
2328 B7	3395 C3	
2329 B6	3396 D2	
2330 A6	3397 D2	
2331 B6	3398 D2	
2332 E2	3399 B13	
2333 D10	3442 E12	
2334 E8	3443 E13	
2336 E8	3453 C2	
2340 I11	3454 B1	
2342 A8	3455 C1	
2343 A10	3459 B12	
2344 H3	3465 B10	
2345 H2	3467 A9	
2346 H2	3470 B8	
2347 H2	3471 A8	
2348 H1	3472 I6	
2349 H1	5301 E2	
2363 F3	5302 E2	
2386 G11	5303 G1	
2392 G12	5304 H1	
2393 E13	5305 H1	
2395 D3	5306 H1	
2396 D3	5307 H1	
2397 D3	5308 H1	
2398 A3	6301 E12	
2429 B4	6303 H8	
2431 B3	6304 H9	
3302 C4	6306 I5	
3304 I11	6307 I5	
3305 C2	6308 C2	
3306 E8	6309 D11	
3307 E9	6310 D9	
3308 E9	6311 D12	
3310 E9	6312 H8	
3311 G7	6313 H8	
3312 E11	6314 H9	
3313 E11	6316 C9	
3314 G7	6317 E12	
3315 G8	6319 D9	
3316 H9	6320 H2	
3317 G9	6321 H3	
3318 F9	6322 H2	
3319 E12	6334 H5	
3320 D3	7301 B4	
3321 E3	7302 A1	
3322 D12	7303 G8	
3323 H5	7304 F2	
3324 I5	7305 B9	
3325 A10	7306 A10	
3326 H5	7310 F12	
3327 G6	7311 F11	
3328 F9	7312 F10	
3329 E2	7313 A12	
3330 A8	7314 A11	
3331 G3	7315 B12	
3332 A7	7318 E10	
3333 F3	7340 B13	
3334 H5	7361 H7	
3335 A7	7362 H6	
3336 H6	7375 B9	
3339 C3	9302 A3	
3340 C11	9303 A3	
3341 C10	9304 A4	
3342 C11	9305 A4	
3343 D12	9308 B4	
3344 D10	9309 B4	
3345 D9	9310 B4	
3346 C9	9311 I1	
3347 D9	9312 I1	

B5 OTC

B5

7001 SAA5801H OTC

7006 LH28F320BJE PROGRAM FLASH-RAM (Set SW)

M29W400BT 7012 EPG-FLASH-RAM

MSM51V18165F 7007 DRAM (TXT)

M24C32 7011 NVM

7005 LD1117

1402 PH

TO 1402 OF H

EXTERNAL CODE AND DATA INTERFACE

OTC

CLOCK GENERATOR AND DISPLAY TIMING

DISPLAY INTERFACE

TXT CLOSE CAPTION EPG USA

B1 ÷ B10

0015 G1	3040 I2
1001 G3	3041 I1
1401 I13	3042 J1
1402 I10	3044 E2
2001 G3	3045 J12
2002 G3	3046-A J12
2003 J4	3046-B J12
2004 J4	3046-C I13
2005 J3	3046-D I13
2006 J3	3047 C2
2007 J3	3048-A B7
2008 H3	3048-B D7
2009 I8	3048-C A7
2010 I8	3048-D D7
2011 I9	3049-A B7
2012 I9	3049-B C7
2013 F12	3049-C B7
2014 I1	3049-D C7
2016 F13	3050-A B7
2017 G12	3050-B C7
2019 F10	3050-C B7
2020 D1	3050-D C7
2022 E2	3051-A B7
2023 A4	3051-B C7
2024 A5	3051-C B7
2025 A5	3051-D C7
2026 A5	3052-A D7
2027 A6	3052-B D7
2028 A6	3052-C D7
2029 A6	3052-D C7
2031 A9	3053 D7
2033 H8	3054-A G7
2034 H8	3054-B E7
2035 H8	3054-C F7
2036 H9	3054-D F7
2037 H9	3055-A G7
2038 E9	3055-B E7
2039 H12	3055-C F7
2040 A12	3055-D F7
2052 J12	3056-A G7
2053 J11	3056-B E7
2054 J13	3056-C F7
2055 J13	3056-D F7
2056 I13	3057-A G7
2057 I13	3057-B E7
2058 C2	3057-C E7
2059 C2	3057-D F7
2060 A4	3058 C1
2061 A3	3059 C1
3001 F3	3061 E9
3002 F4	3062 A10
3003 J3	3064-A F3
3004 F12	3064-B E4
3005 H1	3064-C E3
3008 J5	3064-D E4
3007-A J5	3065 G13
3007-B J6	3066 G13
3007-C J6	3067 H12
3007-D J6	3068 A2
3008-A I6	3069 E3
3008-B I7	3073-A C4
3008-C I7	3073-B C4
3008-D I7	3073-C B4
3009 J7	3073-D B4
3010 I7	3074-A F2
3011 I7	3074-B F3
3012-A I7	3074-C F3
3012-B I8	3074-D A3
3012-C I7	3075 C1
3012-D I8	3076-A D4
3013 F13	3076-B D3
3014 F12	3076-C D3
3015 G12	3076-D D4
3016 G12	3077 D3
3017 F13	3078-B C4
3018 A2	3078-C A3
3019 A2	3078-D B3
3020 A2	3079 E3
3021 B2	3080 A1
3024 D2	3081 A4
3025 E1	3088 E3
3026 E3	3090-A C3
3027 E2	3090-B C4
3029 D9	3090-C C3
3031 D9	3090-D C4
3033 C3	3091 C2
3034-A H6	3093 E12
3034-B H7	3094 H1
3034-C G7	3095 I1
3034-D G6	3096 J1
3035-A H7	3097 A3
3035-B H6	3098 J11
3035-C H7	3099-A B4
3035-D H6	3099-B B4
3039 B2	3099-C A4
	3099-D B4
	6001 E2
	6002 F12
	6003 E3
	6004 D2
	6005 A4
	7001 A6
	7002 F12
	7003 G13
	7004 G13
	7005 E13
	7006 A10
	7007 F10
	7008 E1
	7009 D3
	7010 C3
	7011 G2
	7012 A12
	7013 H13
	7014 G13
	7015 I2
	7016 J2
	9001 H2
	9002 I1
	9003 F1
	9004 G1
	9005 A4
	9006 A3
	9007 F12
	9008 J10
	9009 J12
	9010 I12
	9011 I12
	9012 I12
	9013 J12
	9014 C1
	9015 D1
	9016 C2
	F001 D9

B6 AUDIO DEMODULATOR

ANTI-PLOP CIRCUIT

MSP3452G

DEMODULATOR
NICAM DECODER

DSP

I2S INTERFACE

SCART Switching Facilities

AUDIO PLL

TO 1680
I/O 3d SCART

TO 1948
TUNER SIM/CONNECTOR

LOUDSPEAKER

HEADPHONE

for MSP3410D only
for MSP3415D only

* COMPONENTS WITH DIVERSITY

B1+B10

B5-147 RESET-AUDIO
B1-113 AUDIO-SW
SCL-F B1-89
B1-88 SDA-F
B2-164 SNDR-SC3-IN
B2-165 SNDL-SC3-IN
B2-154 CVBS-AV3-IN
STATUS_SC3
B5-160
HA50
VA50
B2-119 QSS_AM
PIP_AUDIO
PIP_AUD_IN
SNDR-SC3-IN B4-164
SNDL-SC3-IN B4-165
B1-106 R-FRONT-IN
B1-105 L-FRONT-IN
B1-90 R-SC2_AV2-IN
B1-95 L-SC2_AV2-IN
B1-100 R-SC1_AV1-IN
B1-94 L-SC1_AV1-IN

B1-112 AUDIO-C
B1-111 AUDIO-SL
B1-114 AUDIO-L
B1-109 R-CL_VL-OUT
B1-110 L-CL_VL-OUT
SELECT_AUDIO_LR
B1-115 AUDIO-R
B1-101 R-SC1_AV-OUT
B1-97 L-SC1_AV-OUT
B5-145 SEL_IN_2
B1-99 R-SC2-OUT
B1-96 L-SC2-OUT

B7-162 L-HEADPHONE
B7-161 R-HEADPHONE
B1-112 AUDIO-C

MUTE_SW
MUTE_SSB

0016 I1 0017 I1 1651 H8 1680 B2 1681 D2 1682 H8 1683 C7 2501 E4 2502 H2 2503 I2 2504 G2 2506 H2 2506 E2 2507 E2 2508 C8 2509 B12 2510 D13 2511 E13 2512 B9 2513 B10 2514 B8 2516 J9 2516 C6 2546 G13 2547 G13 2548 H13 2549 H13 2550 E3 2551 E2 2552 G2 2553 H2 2554 I2 2555 I2 2556 I1 2557 I7 2558 I8 2559 J7 2560 J7 2561 J8 2562 E1 2563 F1 2564 F1 2565 G1 2566 G1 2567 H1 2568 I1 2569 I1 2570 C2 2571 C2 2572 C14 2573 C15 2574 D14 2575 E14 2576 F14 2577 F14 2580 G14 2581 G14 2582 I13 2583 I13 2584 C5 2585 C5 2587 J8 2588 D1 2589 D1 2590 C6 2591 B6 2592 B1 2593 I3 2594 I3 2595 J3 2600 D11 2601 D11 2602 E11 2603 E11 2604 F11 2609 C8 2610 A4 2611 A4 2612 H9 2629 B11 2630 A13 2632 C5 2634 C5 2637 A11 2640 B7 2643 C10 2644 D9 2645 E9 2646 C10 2649 E9 2651 E4 2652 E4 2653 D2 2654 E3 2659 E2 2660 F2 2661 F3 2662 G2 2663 F2 2664 G2 2665 A3 2666 A4 2667 H7 2668 H8 2670 A9 2673 B11 2674 A11 2677 C6 2678 C8 2679 G9 2680 D9 2681 E4 2682 E3 2686 F9 2687 G10 2690 B9 2691 B6 2693 A5 2694 F9 2695 A1 2697 I3 2698 I3 2699 A11 3518 A7 3520 C12 3521 E13 3522 F13 3523 A7 3524 A9 3525 A9 3526 A10 3527 B10 3528 C14 3529 E14 3530 E14 3531 C1 3532 B7 3533 B5 3540 A6 3544 B11 3545 A12 3546 D11 3547 B13 3550 E3 3551 D2 3552 I4 3553 I5 3554 I5 3555 J5 3556 B14 3557 C13 3558 D14 3559 E13 3561 E13 3562 E1 3563 F13 3564 F1 3567 G1 3568 G14 3569 G14 3570 G1 3571 H1 3572 I11 3573 H13 3574 I1 3575 I13 3576 C1 3577 B2 3578 I14 3579 I14 3601 D12 3602 D12 3603 E12 3604 E12 3605 E12 3606 E12 3607 F12 3608 F12 3609 F12 3612 G13 3613 G13 3614 I14 3615 I14 3616 G14 3617 I9 3618 I9 3619 I9 3624 B4 3626 I4 3627 H4 3628 I5 3630 C5 3634 C4 3636 D10 3637 C10 3640 A11 3641 B11 3642 E9 3643 E9 3644 B8 3650 A2 3651 F2 3652 G2 3653 G2 3654 F2 3655 B3 3656 B3 3657 D10 3658 C10 3659 A13 3663 B14 3664 B14 3666 E10 3667 E10 3668 F10 3669 F10 3670 E10 3671 E10 3673 G12 3675 B12 3676 B11 3677 B13 3680 A14 3681 A11 3682 B12 3683 H14 3684 H3 3685 I2 3686 I2 3687 I2 3688 G2 3689 H2 3690 G2 3691 H2 3692 E9 3693 E2 3694 E2 3695 F2 3698 C10 3699 B5 3851 A3 3852 A3 3853 C8 3854 A5 3855 E4 3856 A1 3857 H7 3858 H7 3859 I7 3860 I7 3861 I7 3862 I7 3863 C1 3864 C6 3865 C6 3866 J7 3867 D1 3868 D1 3869 C7 3870 E10 3871 E10 3872 G12 3873 B12 3874 B11 3875 E4 3876 B11 3877 B13 3880 A14 3881 A11 3882 B12 3883 H14 3884 H3 3885 I2 3886 I2 3887 I2 3888 G2 3889 H2 3890 G2 3891 H2 3892 E9 3893 E2 3894 E2 3895 F2 3898 C10 3899 B5 3951 A3 3952 A3 3953 C8 3954 A5 3955 E4 3956 A1 3957 H7 3958 H7 3959 I7 3960 I7 3961 I7 3962 I7 3963 C1 3964 C6 3965 C6 3966 J7 3967 D1 3968 D1 3969 I7 3970 I7 3971 I7 3972 I7 3973 I7 3974 I7 3975 I7 3976 I7 3977 I7 3978 I7 3979 I7 3980 I7 3981 I7 3982 I7 3983 I7 3984 I7 3985 I7 3986 I7 3987 I7 3988 G2 3989 H2 3990 G2 3991 H2 3992 E9 3993 E2 3994 E2 3995 F2 3998 C10 3999 B5 4851 A3 4852 A3 4853 C8 4854 A5 4855 E4 4856 A1 4857 H7 4858 H7 4859 I7 4860 I7 4861 I7 4862 I7 4863 C1 4864 C6 4865 C6 4866 J7 4867 D1 4868 D1 5672 J9 6650 A3 6651 E3 6652 C8 6653 C8 6654 B6 6656 A7 6657 A10 6658 A10 7651 D4 7652 H12 7653 D13 7654-A H4 7654-B I4 7655-A B12 7655-B B12 7663-A B14 7663-B B14 7664-A C10 7664-B C11 7665-A E10 7665-B E11 7666-A C4 7666-B B4 7667 I5 7668 A6 7669 H10 7670 I9 7674 B6 7675-A A8 7675-B A9 7677 C14 7678-A E14 7678-B E14 7679-A I14 7679-B I14 7680 G13 9520 A8 9521 A8 9522 B9 9523 A7 9600 A3 9604 A2 9606 A1 9607 I5 9608 I6 9609 I6 9610 D13 9611 G11 9632 H13 9642 D13 9643 F13 9652 E1 9676 J12 9677 J12 9682 H7 9683 H7 9684 I7 9685 I7 9686 I7 9687 I7 9688 C9 9689 A6 9691 C9 9692 A9 9693 A9 9694 C2 C100 J3

B9 ANTI-MOIRÉ

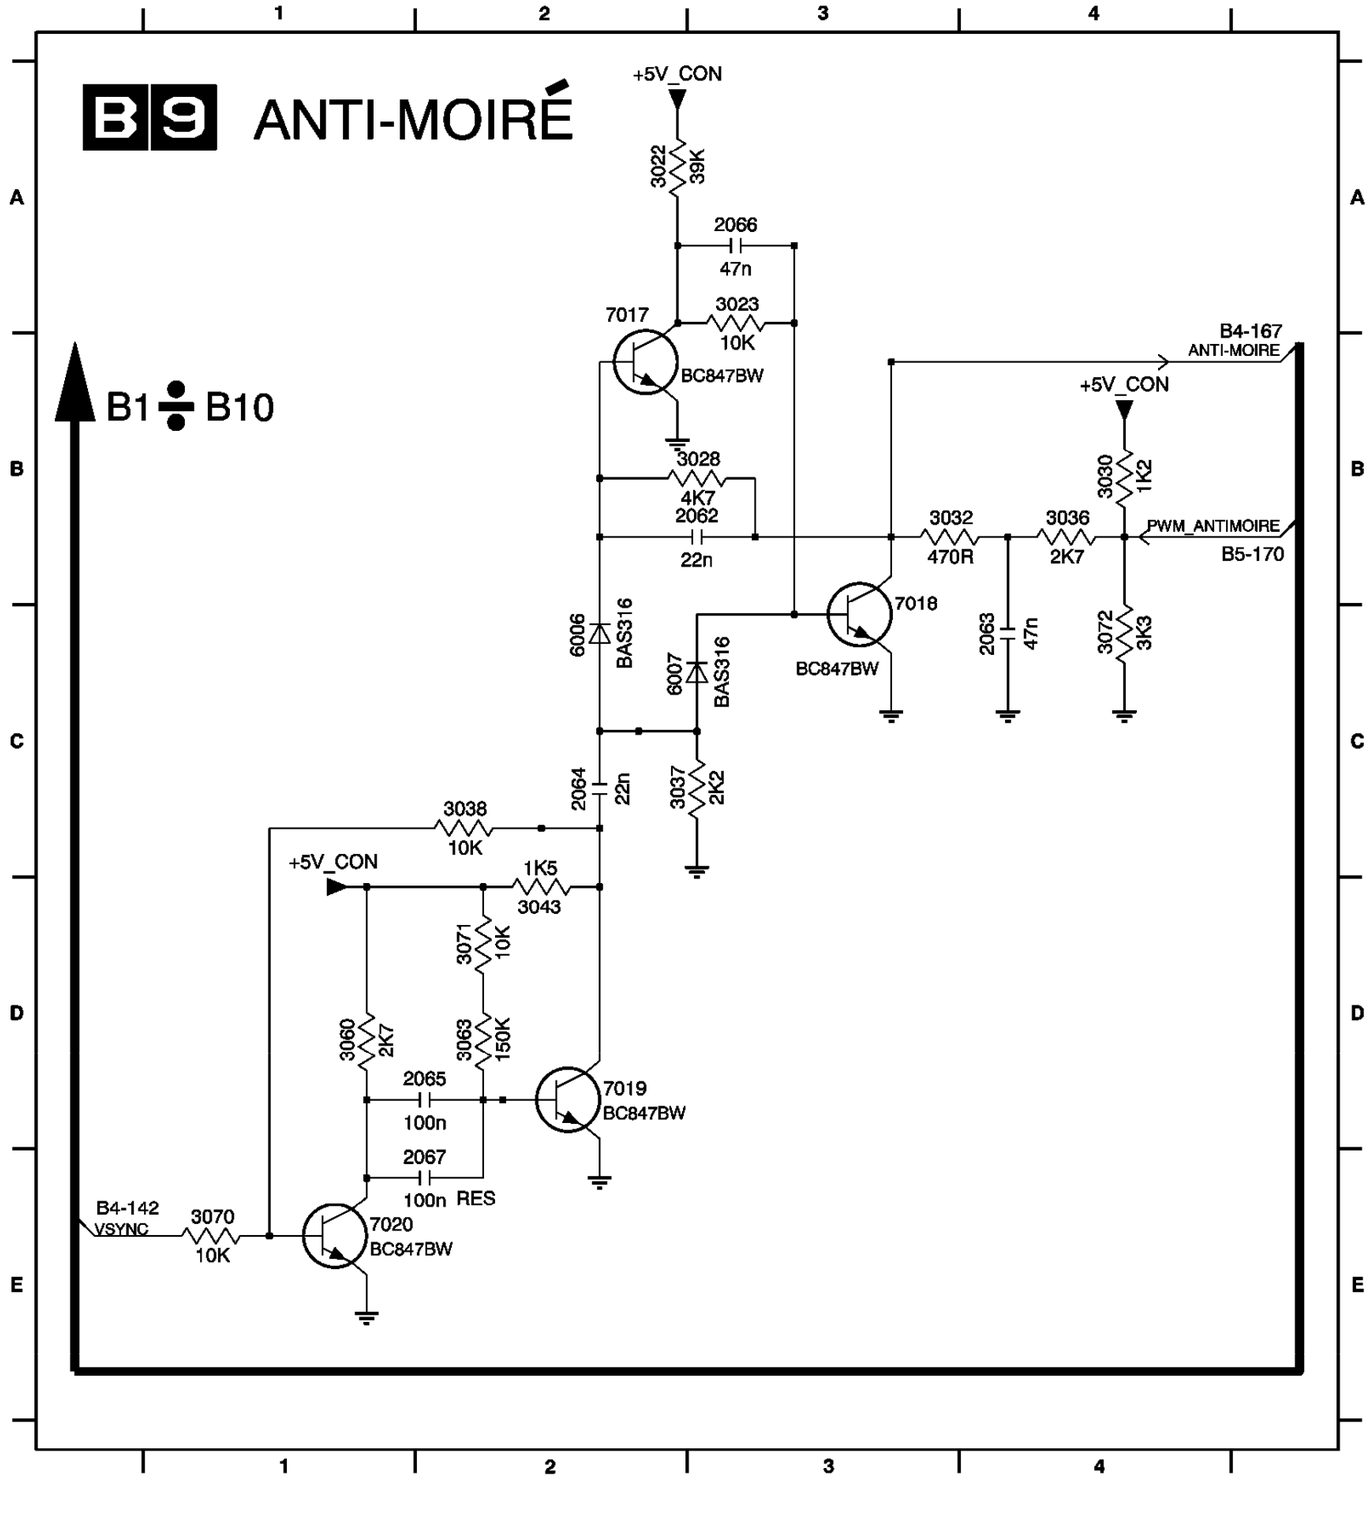

2062 B3
2063 C4
2064 C2
2065 D2
2066 A3
2067 E2
3022 A2
3023 A3
3028 B3
3030 B4
3032 B3
3036 B4
3037 C2
3038 C2
3043 D2
3060 D1
3063 D2
3070 E1
3071 D2
3072 C4
6006 C2
6007 C2
7017 A2
7018 C3
7019 D2
7020 E1

B10 HEADPHONE-AMPLIFIER

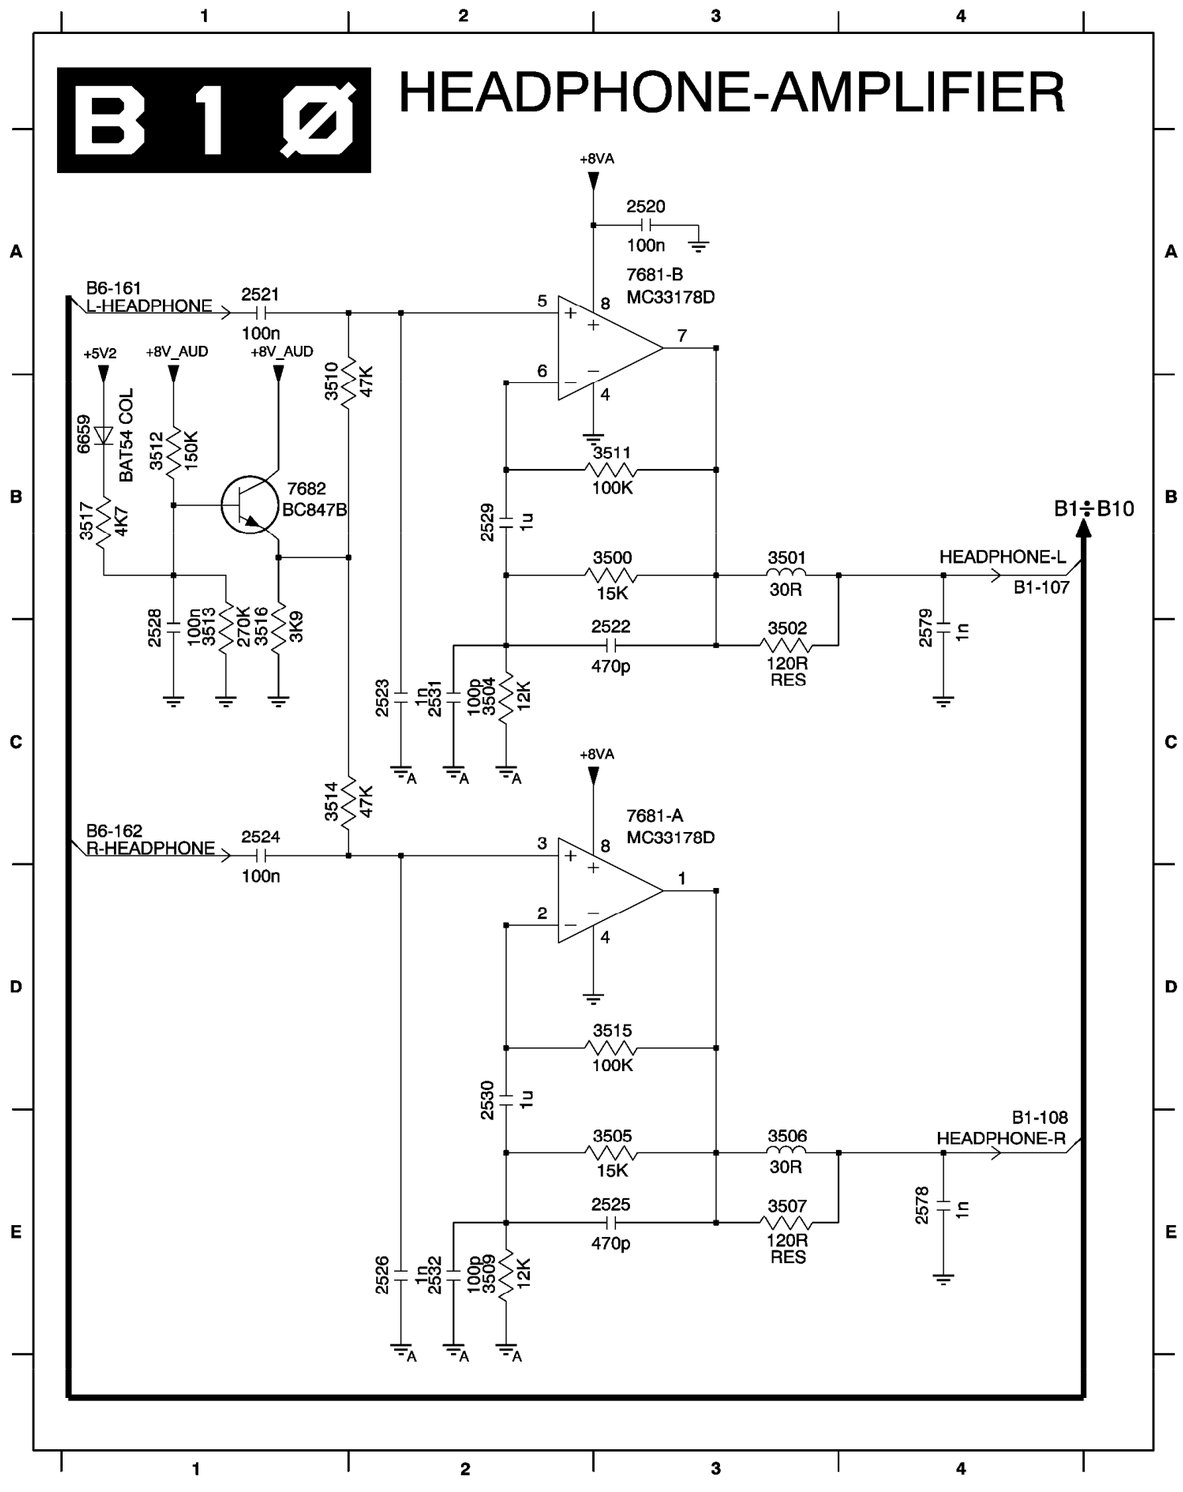

2520 A3
2521 A1
2522 C3
2523 C2
2524 C1
2525 E3
2526 E2
2528 C1
2529 B2
2530 D2
2531 C2
2532 E2
2578 E4
2579 C4
3500 B3
3501 B3
3502 C3
3504 C2
3505 E3
3506 E3
3507 E3
3509 E2
3510 B1
3511 B3
3512 B1
3513 C1
3514 C1
3515 D3
3516 C1
3517 B1
6659 B1
7681-A C3
7681-B A3
7682 B1

B 11 LVDS

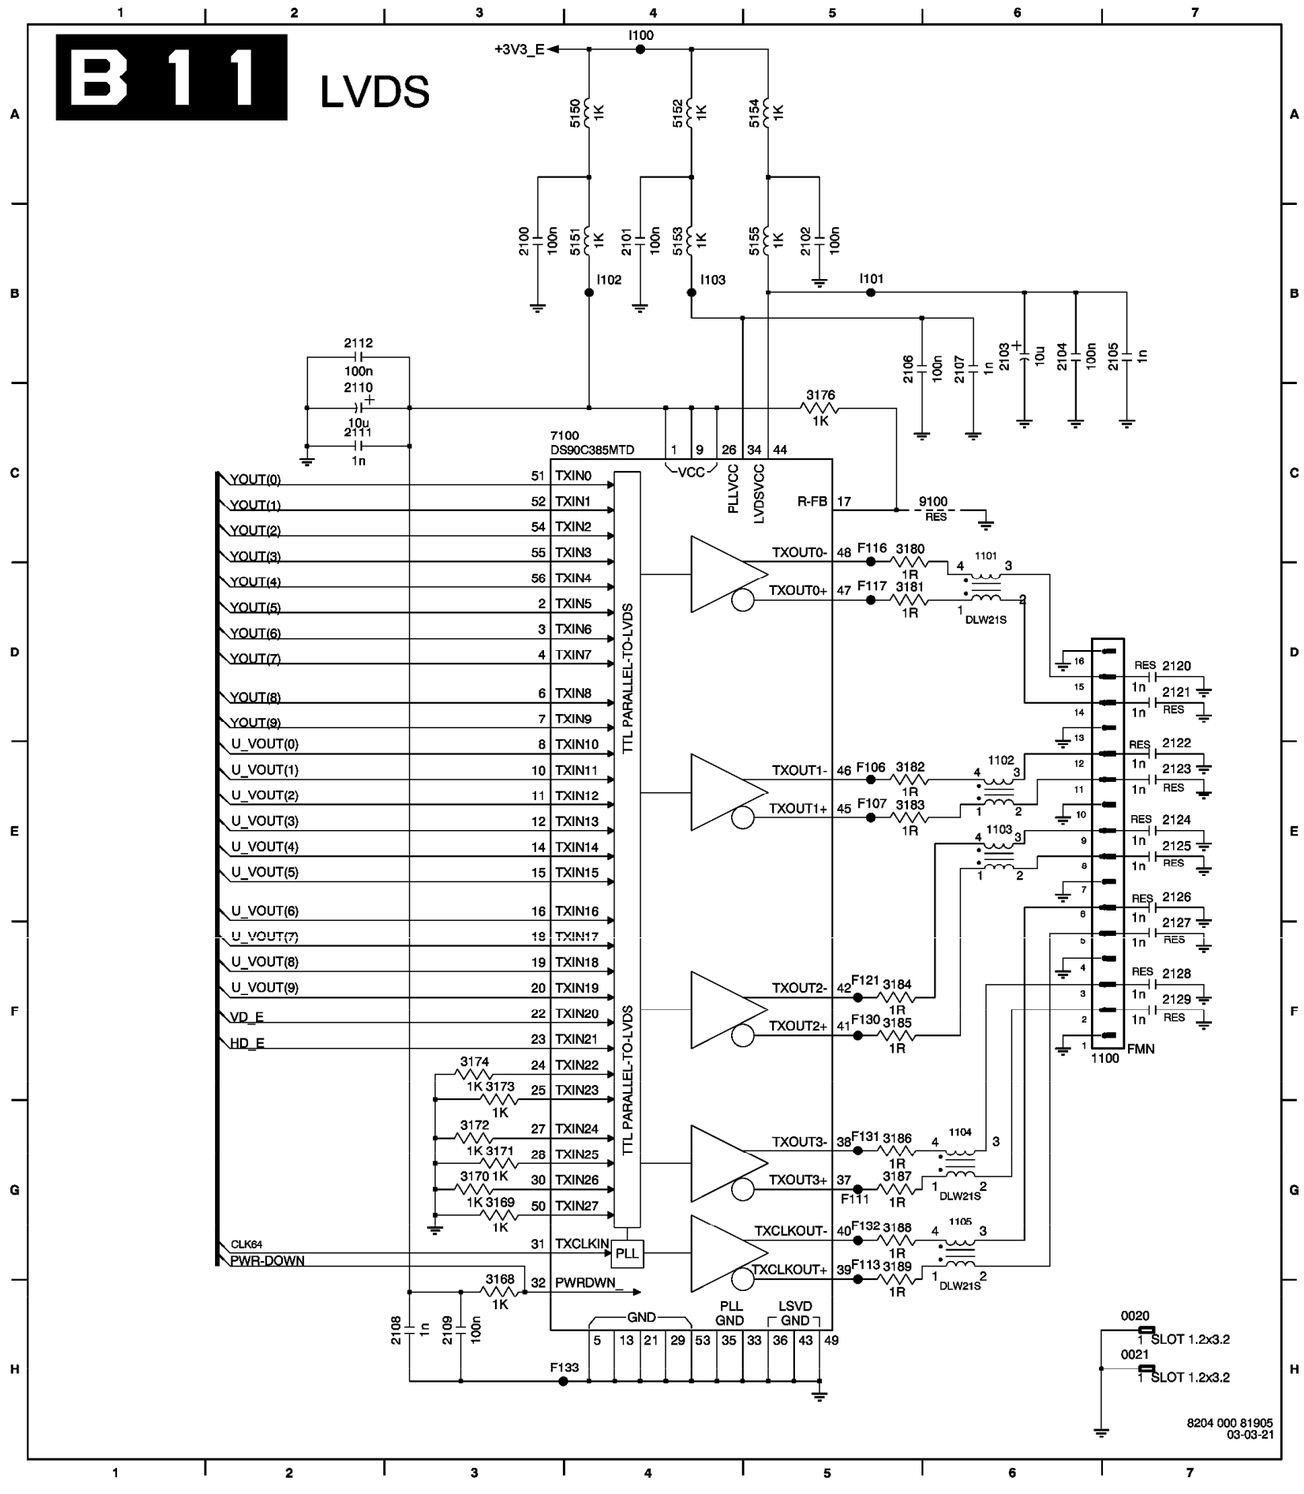

0020 H7
0021 H7
1100 F6
1101 C6
1102 E6
1103 E6
1104 G6
1105 G6
2100 B3
2101 B4
2102 B5
2103 B6
2104 B6
2105 B7
2106 B5
2107 B6
2108 H3
2109 H3
2110 C2
2111 C2
2112 B2
2120 D7
2121 D7
2122 E7
2123 E7
2124 E7
2125 E7
2126 E7
2127 F7
2128 F7
2129 F7
3168 H3
3169 G3
3170 G3
3171 G3
3172 G3
3173 F3
3174 F3
3176 C5
3180 C5
3181 D5
3182 E5
3183 E5
3184 F5
3185 F5
3186 G5
3187 G5
3188 G5
3189 G5
5150 A4
5151 B4
5152 A4
5153 B4
5154 A5
5155 B5
7100 C3
9100 C6
F106 E5
F107 E5
F111 G5
F113 G5
F116 C5
F117 D5
F121 F5
F130 F5
F131 G5
F132 G5
F133 H4
I100 A4
I101 B5
I102 B4
I103 B4

SL 1 A OSD INSERTION

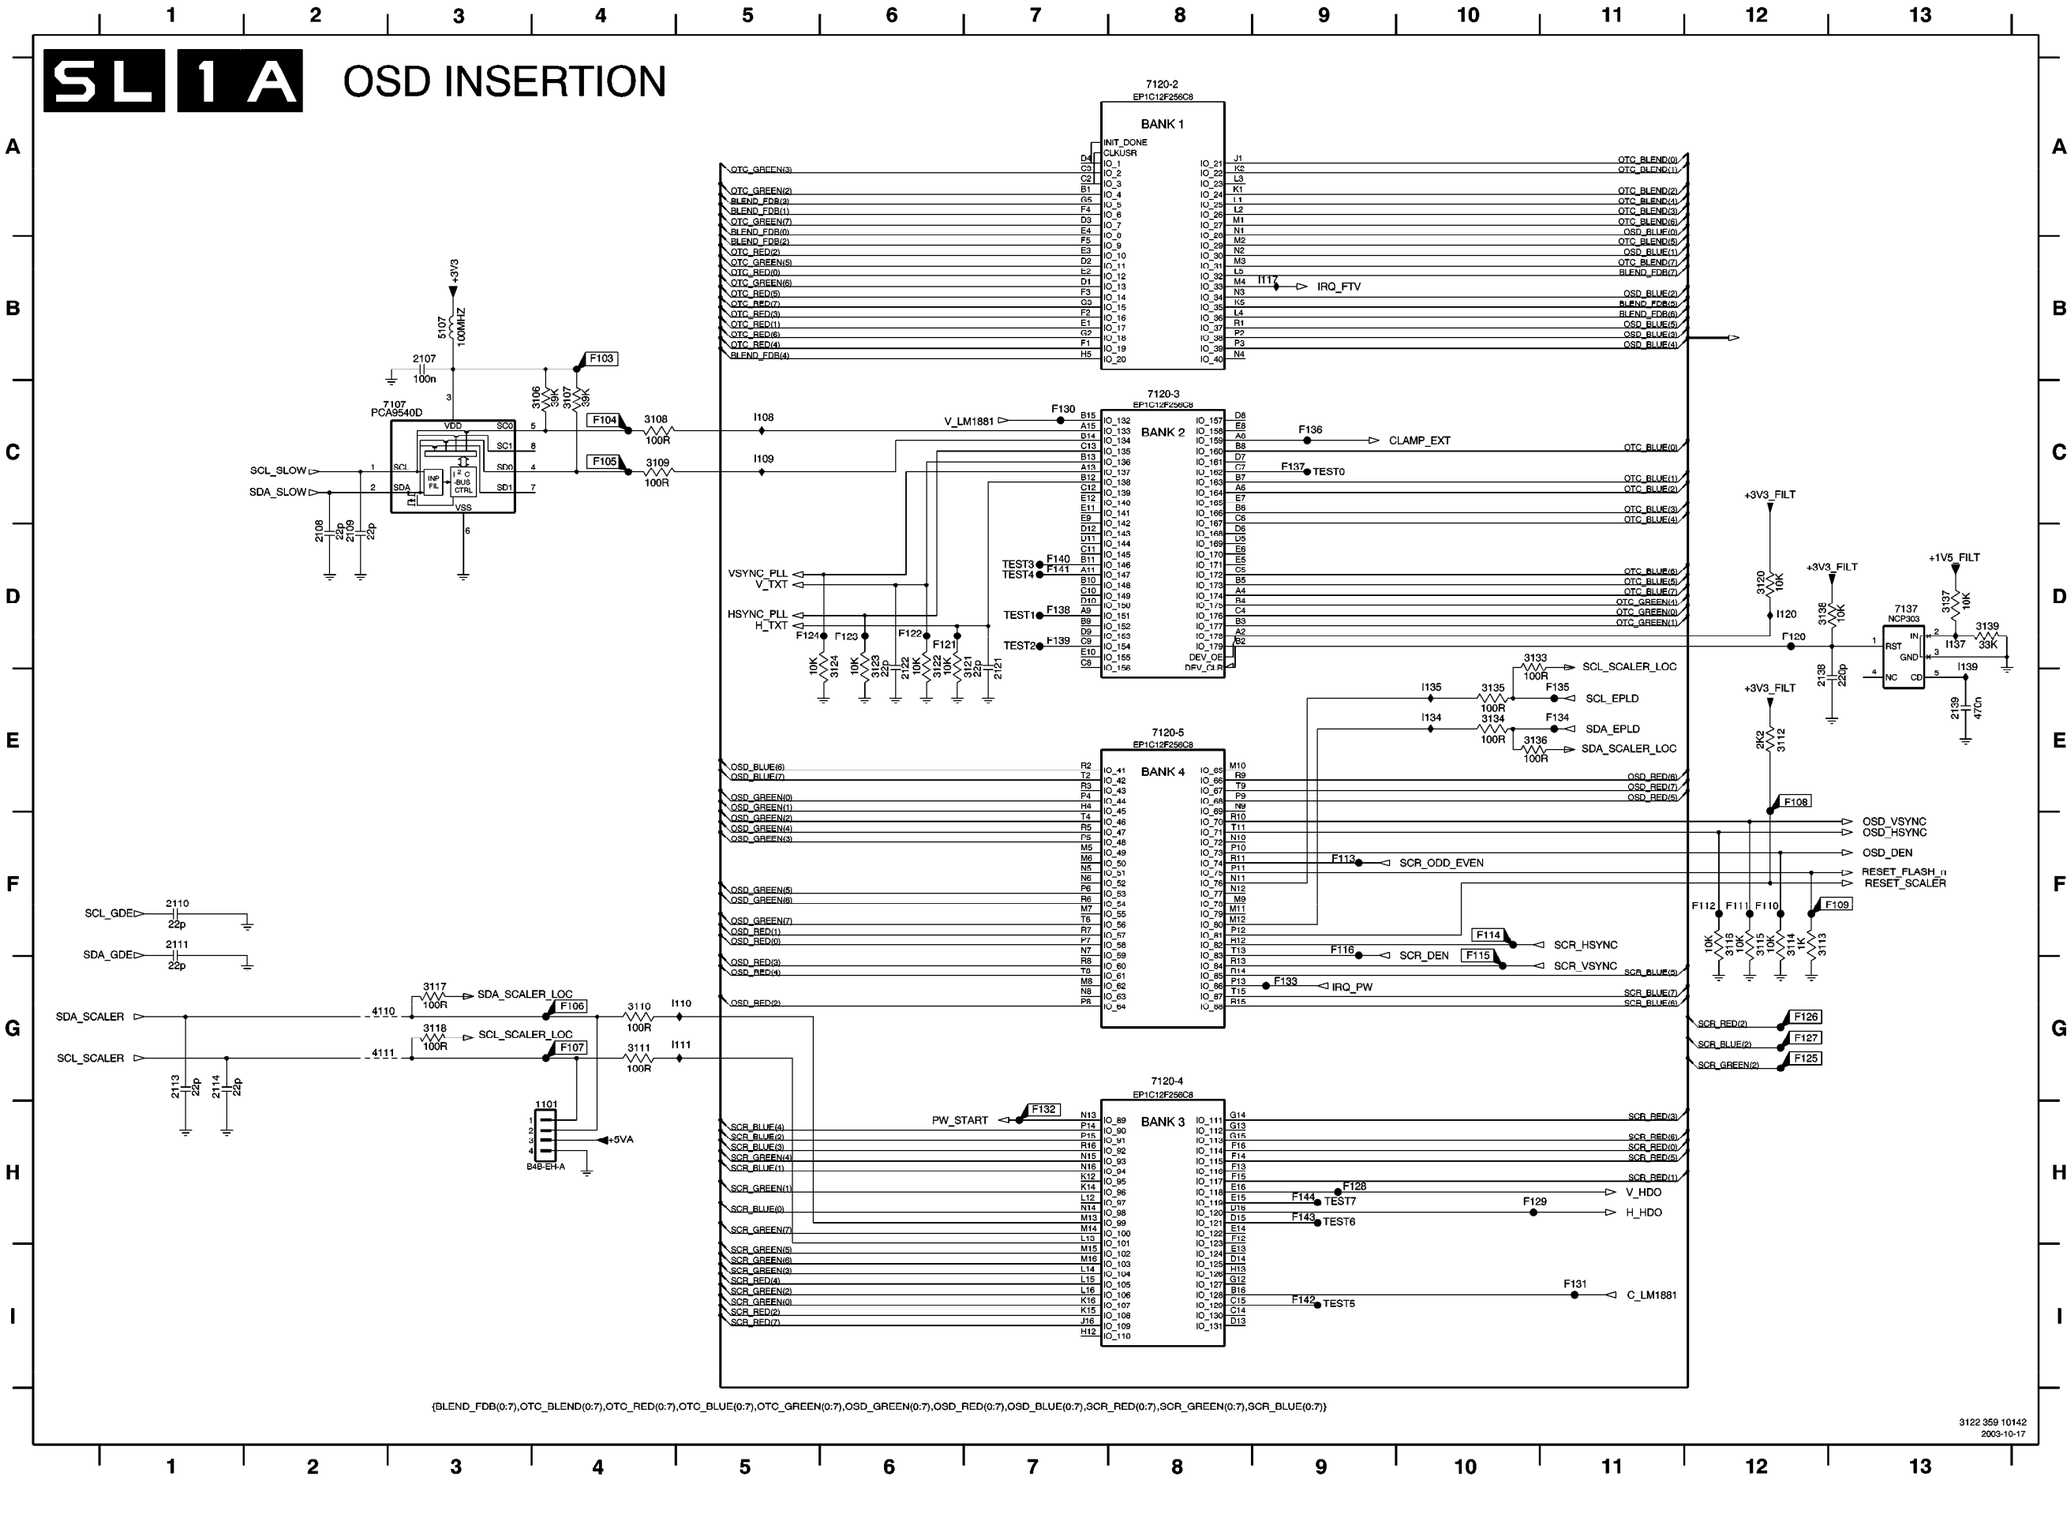

1101 H4
2107 B3
2108 D2
2109 D2
2110 F1
2111 F1
2113 G1
2114 G1
2121 E7
2122 E6
2138 E12
2139 E13
3106 C4
3107 C4
3108 C4
3109 C4
3110 G4
3111 G4
3112 E12
3113 F12
3114 F12
3115 F12
3116 F12
3117 G3
3118 G3
3120 D12
3121 D7
3122 D6
3123 D6
3124 D6
3133 D10
3134 E10
3135 E10
3136 E10
3137 D13
3138 D12
3139 D13
4110 G2
4111 G2
5107 B3
7107 C3
7120-2 A8
7120-3 C8
7120-4 G8
7120-5 E8
7137 D13
F103 B4
F104 C4
F105 C4
F106 G4
F107 G4
F108 E12
F109 F13
F110 F12
F111 F12
F112 F12
F113 F9
F114 F10
F115 F10
F116 F9
F120 D12
F121 D6
F122 D6
F123 D6
F124 D5
F125 G12
F126 G12
F127 G12
F128 H9
F129 H10
F130 C7
F131 I11
F132 H7
F133 G9
F134 E11
F135 E11
F136 C9
F137 C9
F138 D7
F139 D7
F140 D7
F141 D7
F142 I9
F143 H9
F144 H9
I108 C5
I109 C5
I110 G5
I111 G5
I117 B9
I120 D12
I134 E10
I135 E10
I136 E10
I137 D13
I139 D13

SL 1 B OSD INSERTION

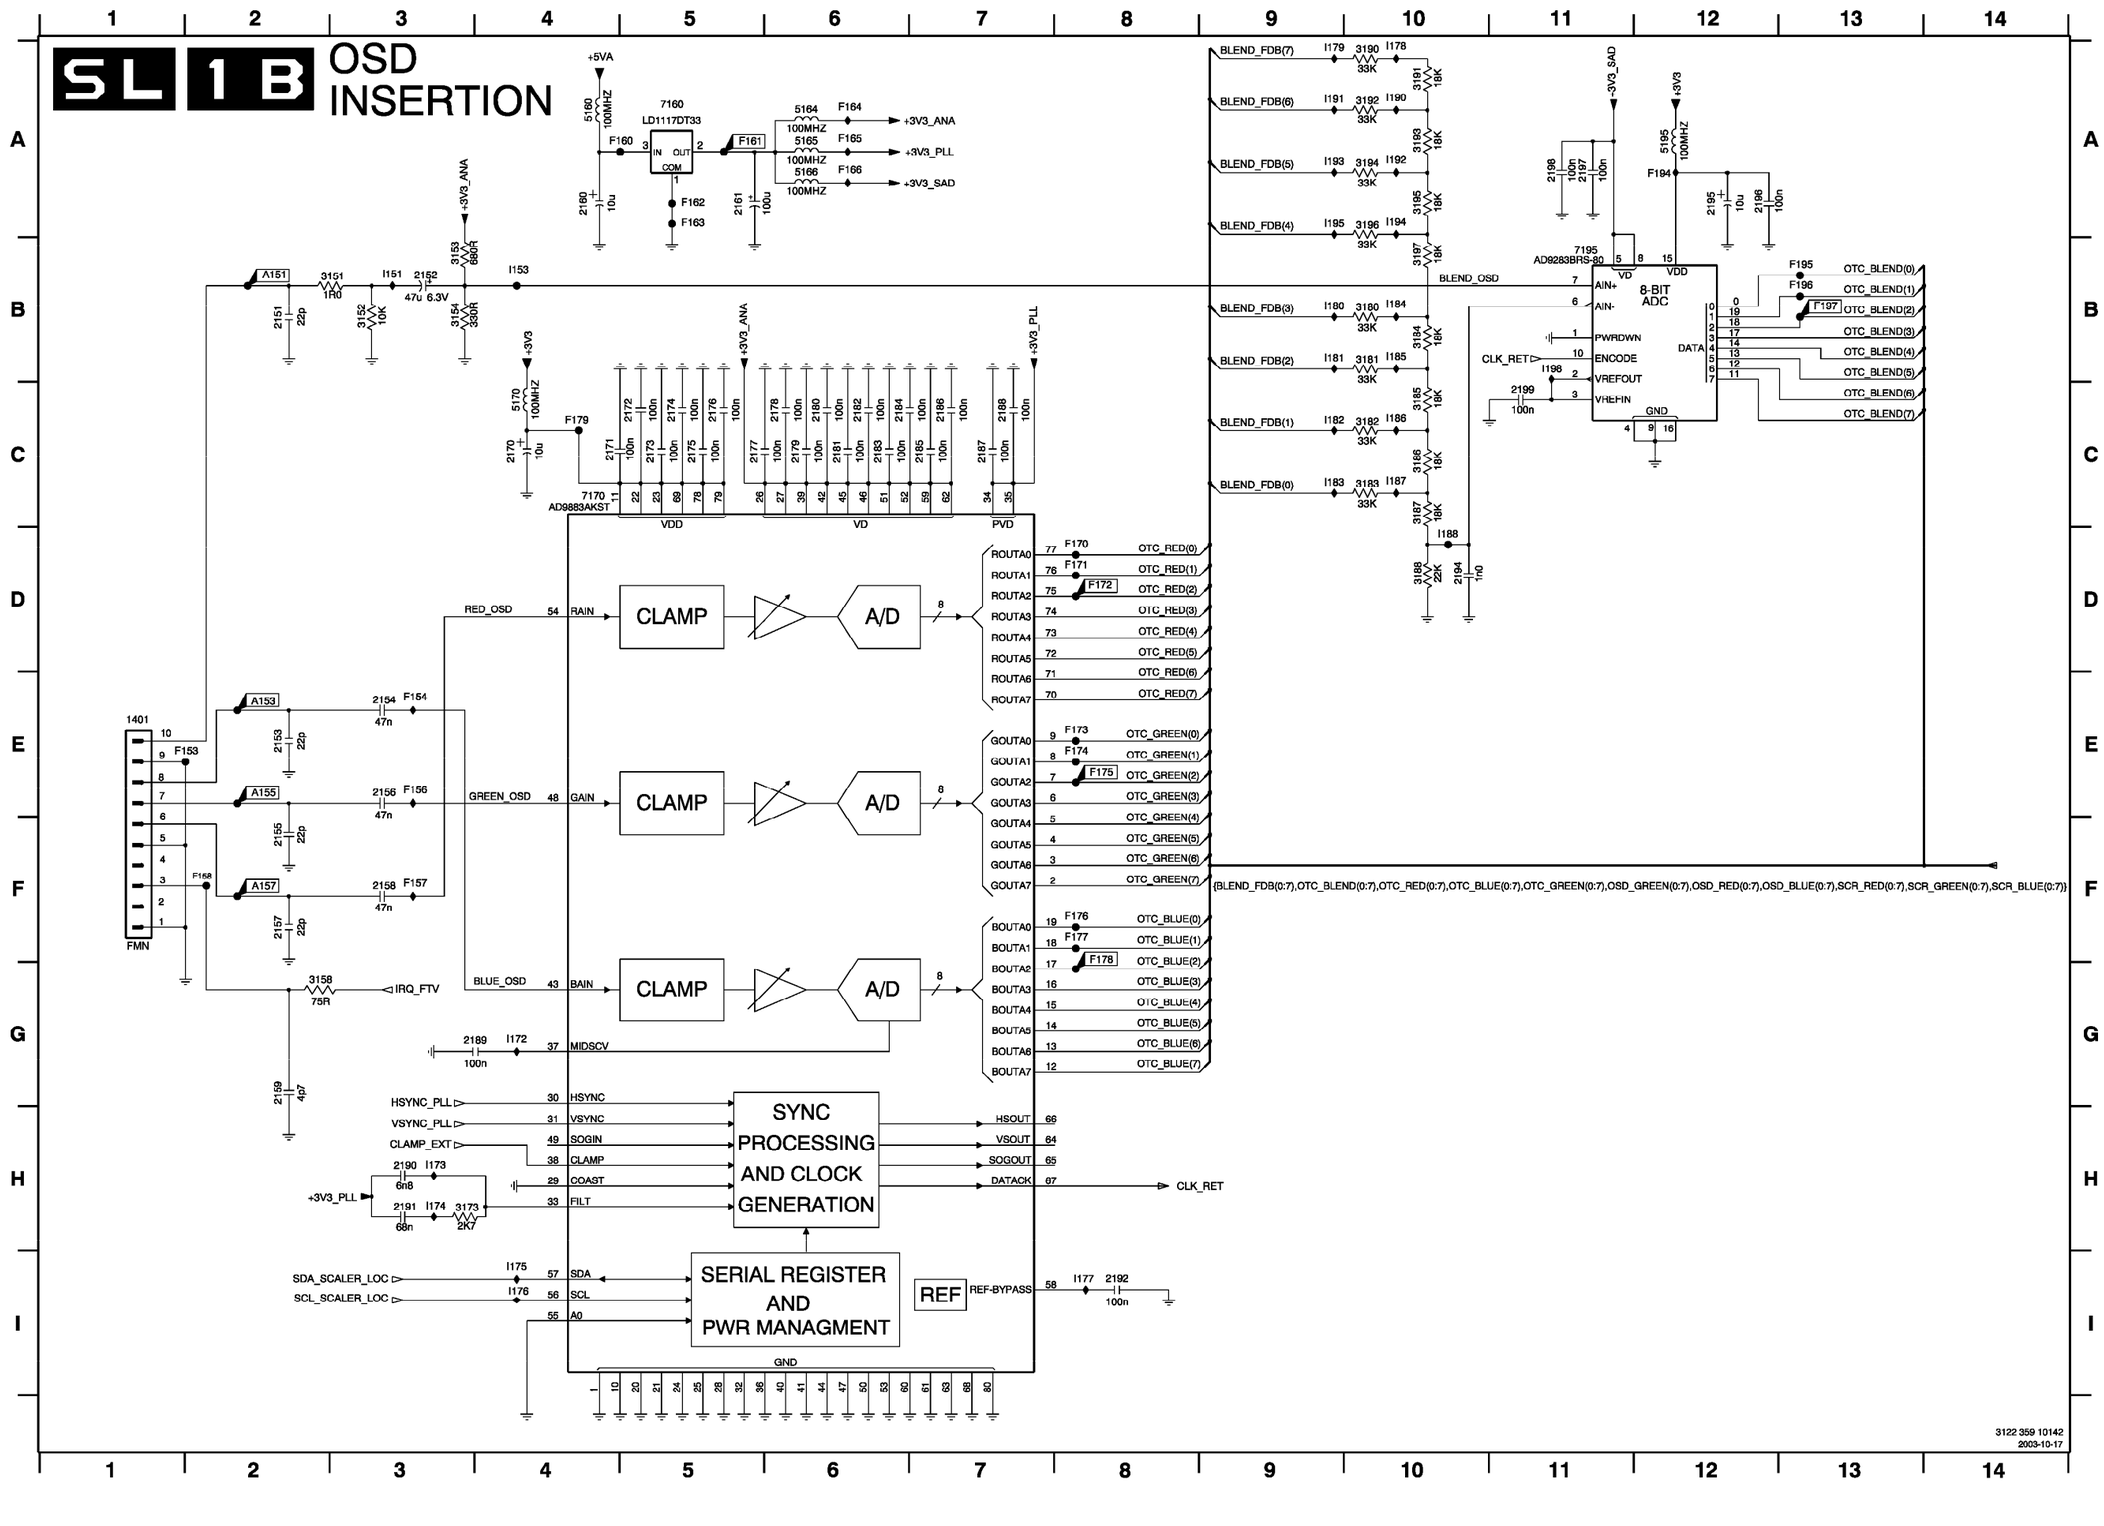

1401 E1
2151 B2
2152 B3
2153 E2
2154 E3
2155 F2
2156 E3
2157 F2
2158 F3
2159 G2
2160 A4
2161 A5
2170 C4
2171 C4
2172 C5
2173 C5
2174 C5
2175 C5
2176 C5
2177 C5
2178 C6
2179 C6
2180 C6
2181 C6
2182 C6
2183 C6
2184 C6
2185 C7
2186 C7
2187 C7
2188 C7
2189 G4
2190 H3
2191 H3
2192 I8
2194 D10
2195 A12
2196 A12
2197 A11
2198 A11
2199 C11
3151 B3
3152 B3
3153 B3
3154 B3
3158 G2
3173 H3
3180 B10
3181 B10
3182 C10
3183 C10
3184 B10
3185 C10
3186 C10
3187 C10
3188 D10
3190 A10
3191 A10
3192 A10
3193 A10
3194 A10
3195 A10
3196 A10
3197 B10
5160 A4
5164 A6
5165 A6
5166 A6
5170 C4
5195 A12
7160 A5
7170 C4
7195 B11
A151 B2
A153 E2
A155 E2
A157 F2
F153 E2
F154 E3
F156 E3
F157 F3
F158 F2
F160 A5
F161 A5
F162 A5
F163 A5
F164 A6
F165 A6
F166 A6
F170 D8
F171 D8
F172 D8
F173 E8
F174 E8
F175 E8
F176 F8
F177 F8
F178 F8
F179 C4
F194 A12
F195 B13
F196 B13
F197 B13
I151 B3
I153 B4
I172 G4
I173 H3
I174 H3
I175 I4
I176 I4
I177 I8
I178 A10
I179 A9
I180 B9
I181 B9
I182 C9
I183 C9
I184 B10
I185 B10
I186 C10
I187 C10
I188 D10
I190 A10
I191 A9
I192 A10
I193 A9
I194 A10
I195 A9
I198 B11

SL1C

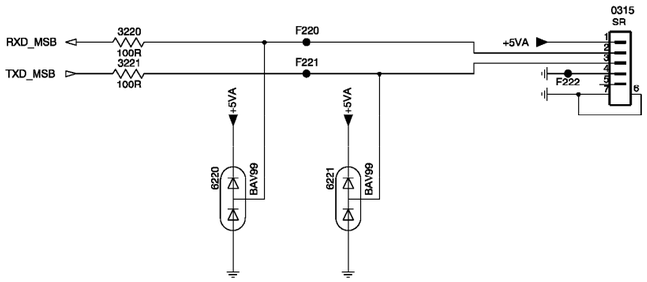

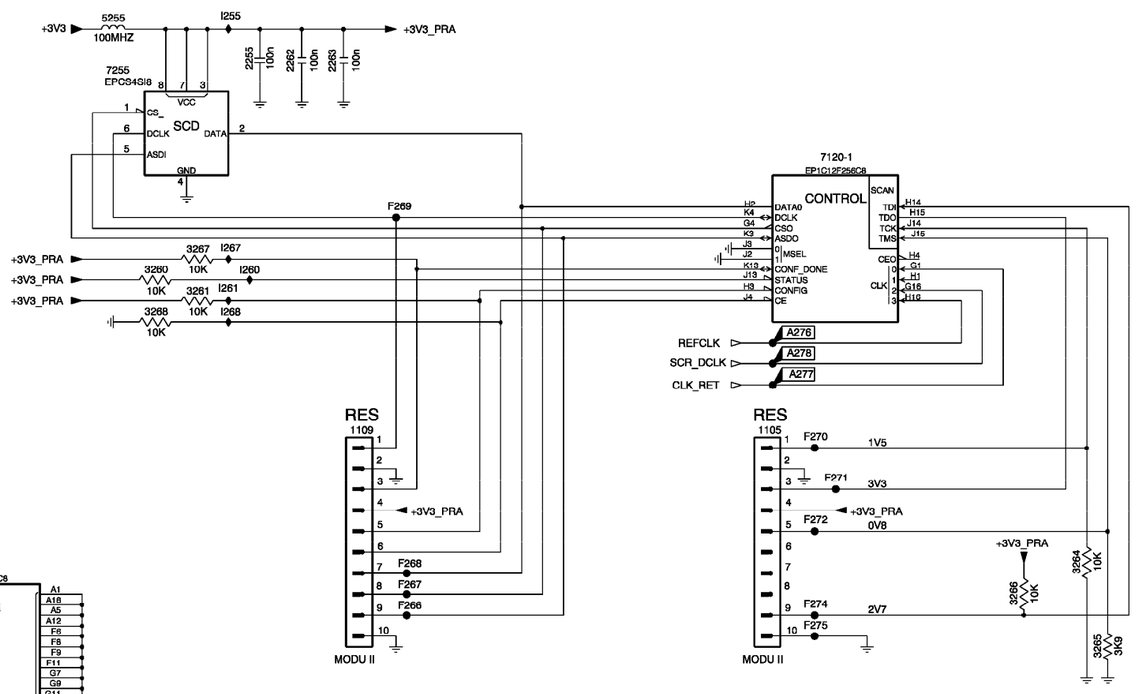

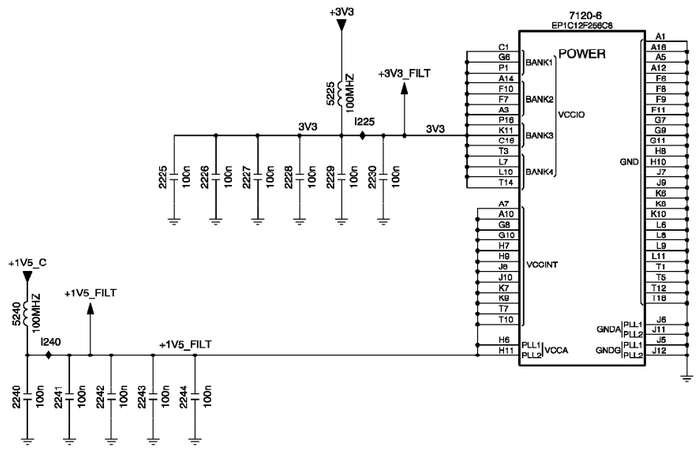

3122 359 10142
2003-10-17

0315 B5
1105 E11
1109 E8
2225 G2
2226 G2
2227 G3
2228 G3
2229 G3
2230 G4
2240 I1
2241 I1
2242 I2
2243 I2
2244 I2
2255 C7
2262 C7
2263 C7
3220 B2
3221 C2
3260 D6
3261 D7
3264 F13
3265 G13
3266 F12
3267 D7
3268 D6
5225 G3
5240 H1
5255 B6
6220 C2
6221 C3
7120-1 C11
7120-6 F5
7255 C6
A276 E11
A277 E11
A278 E11
F220 B3
F221 C3
F222 C5
F266 F8
F267 F8
F268 F8
F269 D8
F270 E11
F271 F11
F272 F11
F274 F11
F275 G11
I225 G4
I240 H1
I255 B7
I260 D7
I261 D7
I267 D7
I268 D7

SL2 TMDS - TX

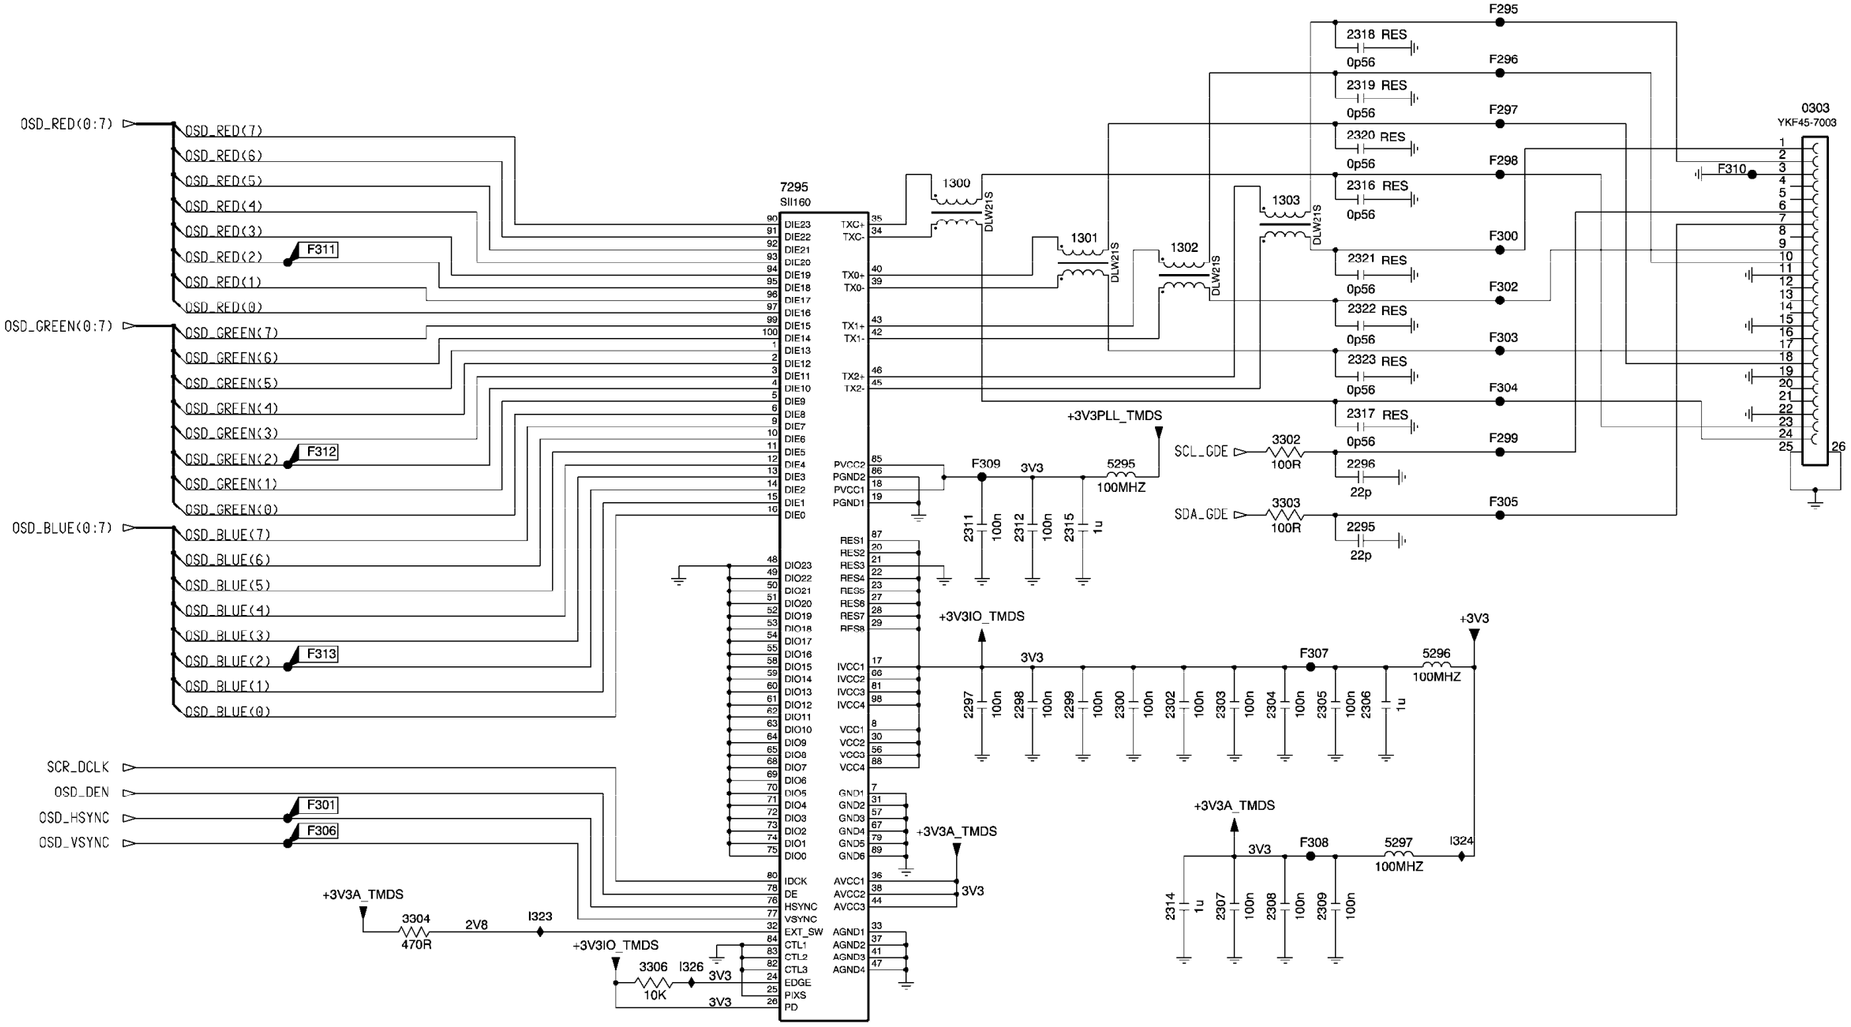

3122 359 10152
2003-10-17

0303 B12
1300 C7
1301 C7
1302 C8
1303 C8
2295 D9
2296 D9
2297 E7
2298 E7
2299 E7
2300 E8
2302 E8
2303 E8
2304 E9
2305 E9
2306 E9
2307 F8
2308 F9
2309 F9
2311 D7
2312 D7
2314 F8
2315 D7
2316 B9
2317 D9
2318 B9
2319 B9
2320 B9
2321 C9
2322 C9
2323 C9
3302 D9
3303 D9
3304 G4
3306 G5
5295 D8
5296 E9
5297 F9
7295 B6
F295 A10
F296 B10
F297 B10
F298 B10
F299 D10
F300 C10
F301 F3
F302 C10
F303 C10
F304 D10
F305 D10
F306 F3
F307 E9
F308 F9
F309 D7
F310 B11
F311 C3
F312 D3
F313 E3
I323 G4
I324 F10
I326 G5

SL 3A SCALER - 1

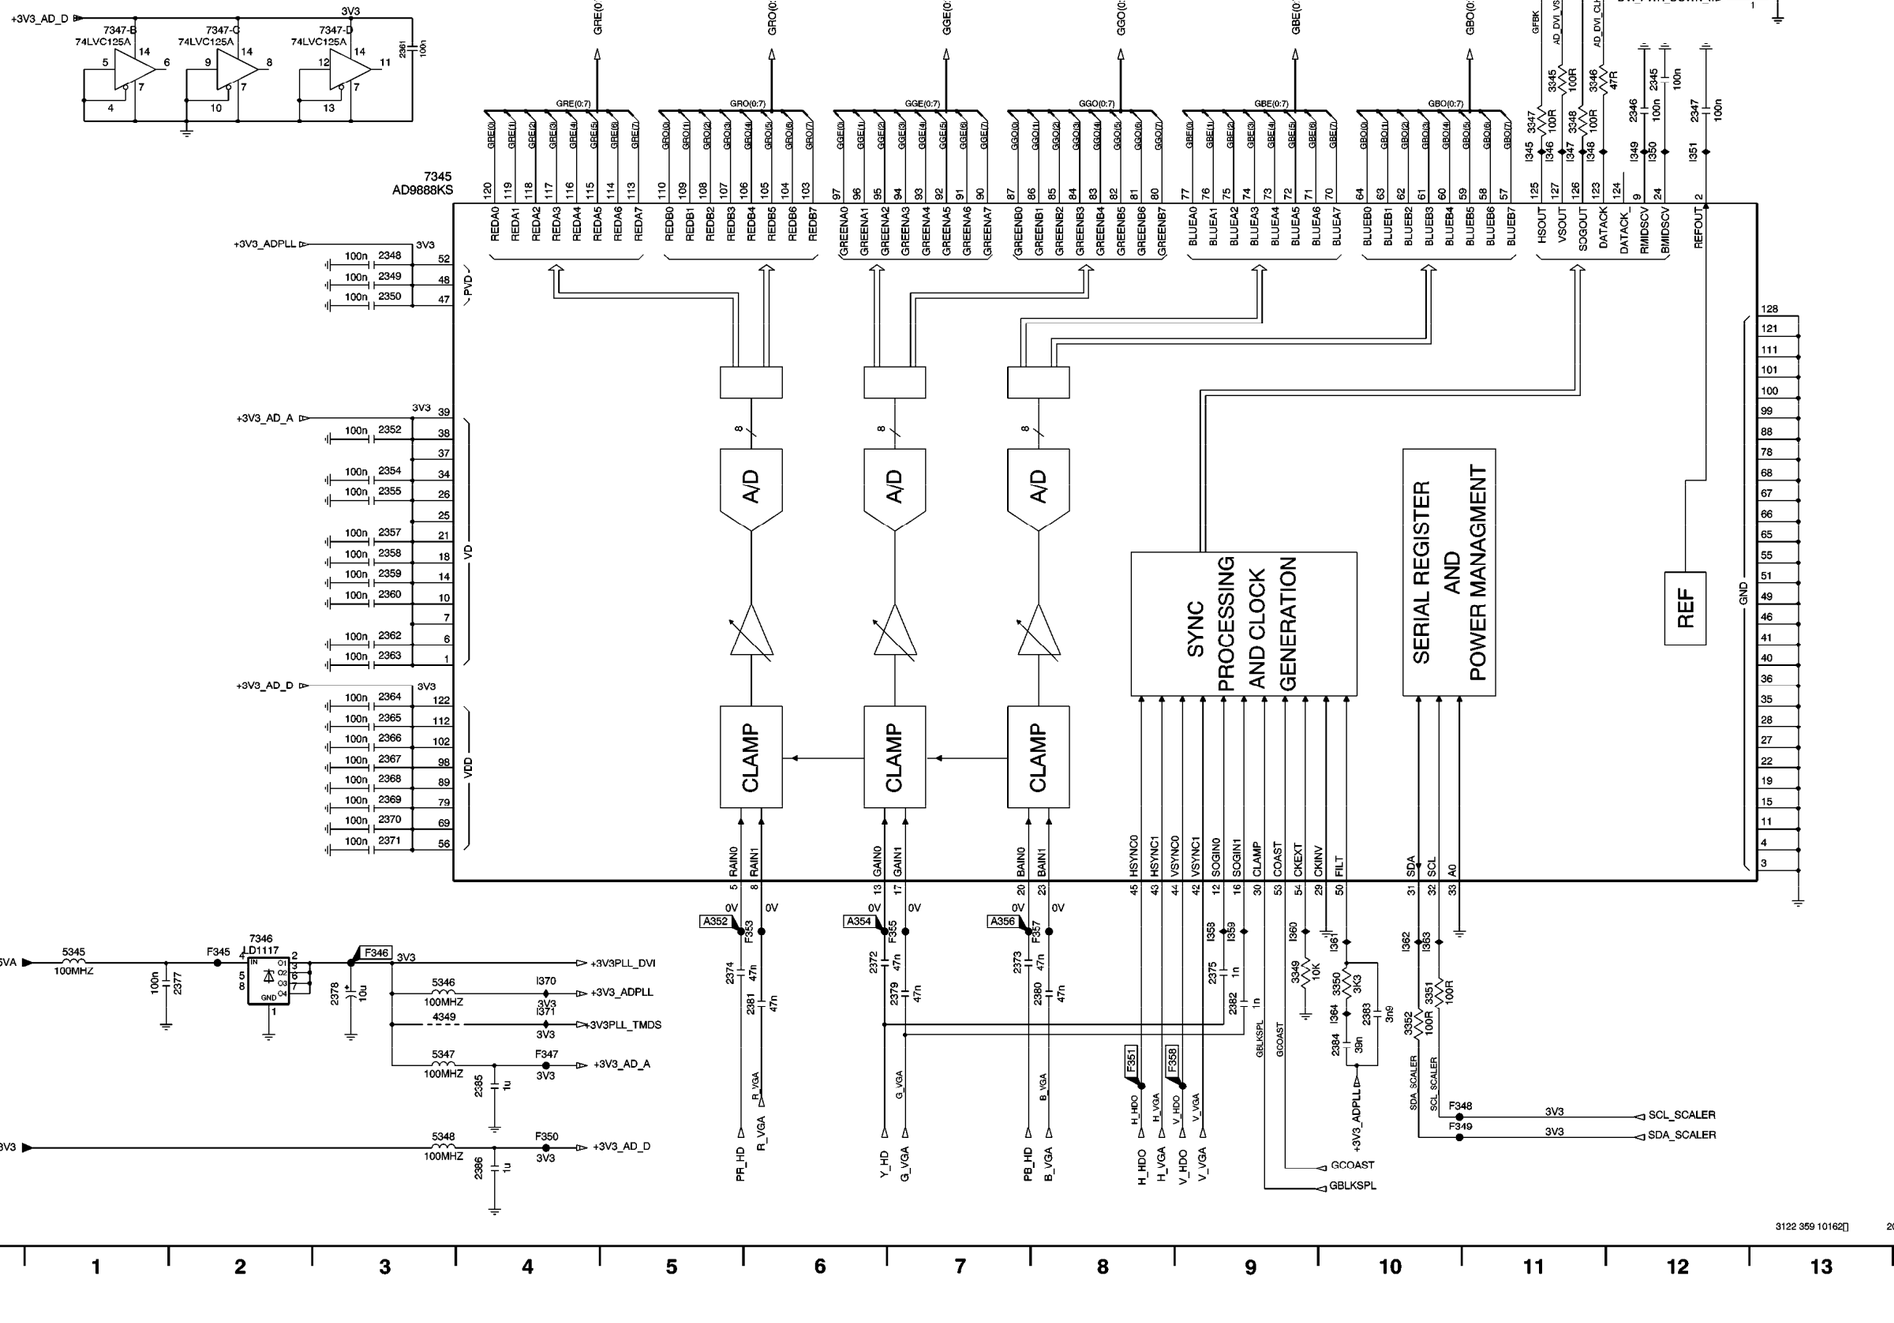

2345 B12
2346 B12
2347 B12
2348 C3
2349 C3
2350 C3
2352 D3
2354 E3
2355 E3
2357 E3
2358 E3
2359 E3
2360 E3
2361 B3
2362 F3
2363 F3
2364 F3
2365 F3
2366 F3
2367 G3
2368 G3
2369 G3
2370 G3
2371 G3
2372 H6
2373 H7
2374 H5
2375 H9
2377 H2
2378 H3
2379 H7
2380 H8
2381 H6
2382 H9
2383 H10
2384 I10
2385 I4
2386 I4
3345 B11
3346 B11
3347 B11
3348 B11
3349 H9
3350 H10
3351 H10
3352 H10
4349 H3
5345 H1
5346 H3
5347 I3
5348 I3
7345 B3
7346 H2
7347-A A12
7347-B A1
7347-C A2
7347-D A3
A352 H5
A354 H6
A356 H7
F345 H2
F346 H3
F347 I4
F348 I10
F349 I10
F350 I4
F351 I8
F353 H6
F355 H7
F357 H8
F358 I8
I345 B11
I346 B11
I347 B11
I348 B11
I349 B12
I350 B12
I351 B12
I358 H9
I359 H9
I360 H9
I361 H10
I362 H10
I363 H10
I364 H10
I365 A11
I366 A11
I367 A11
I368 A11
I370 H4
I371 H4

SL 3B SCALER - 2

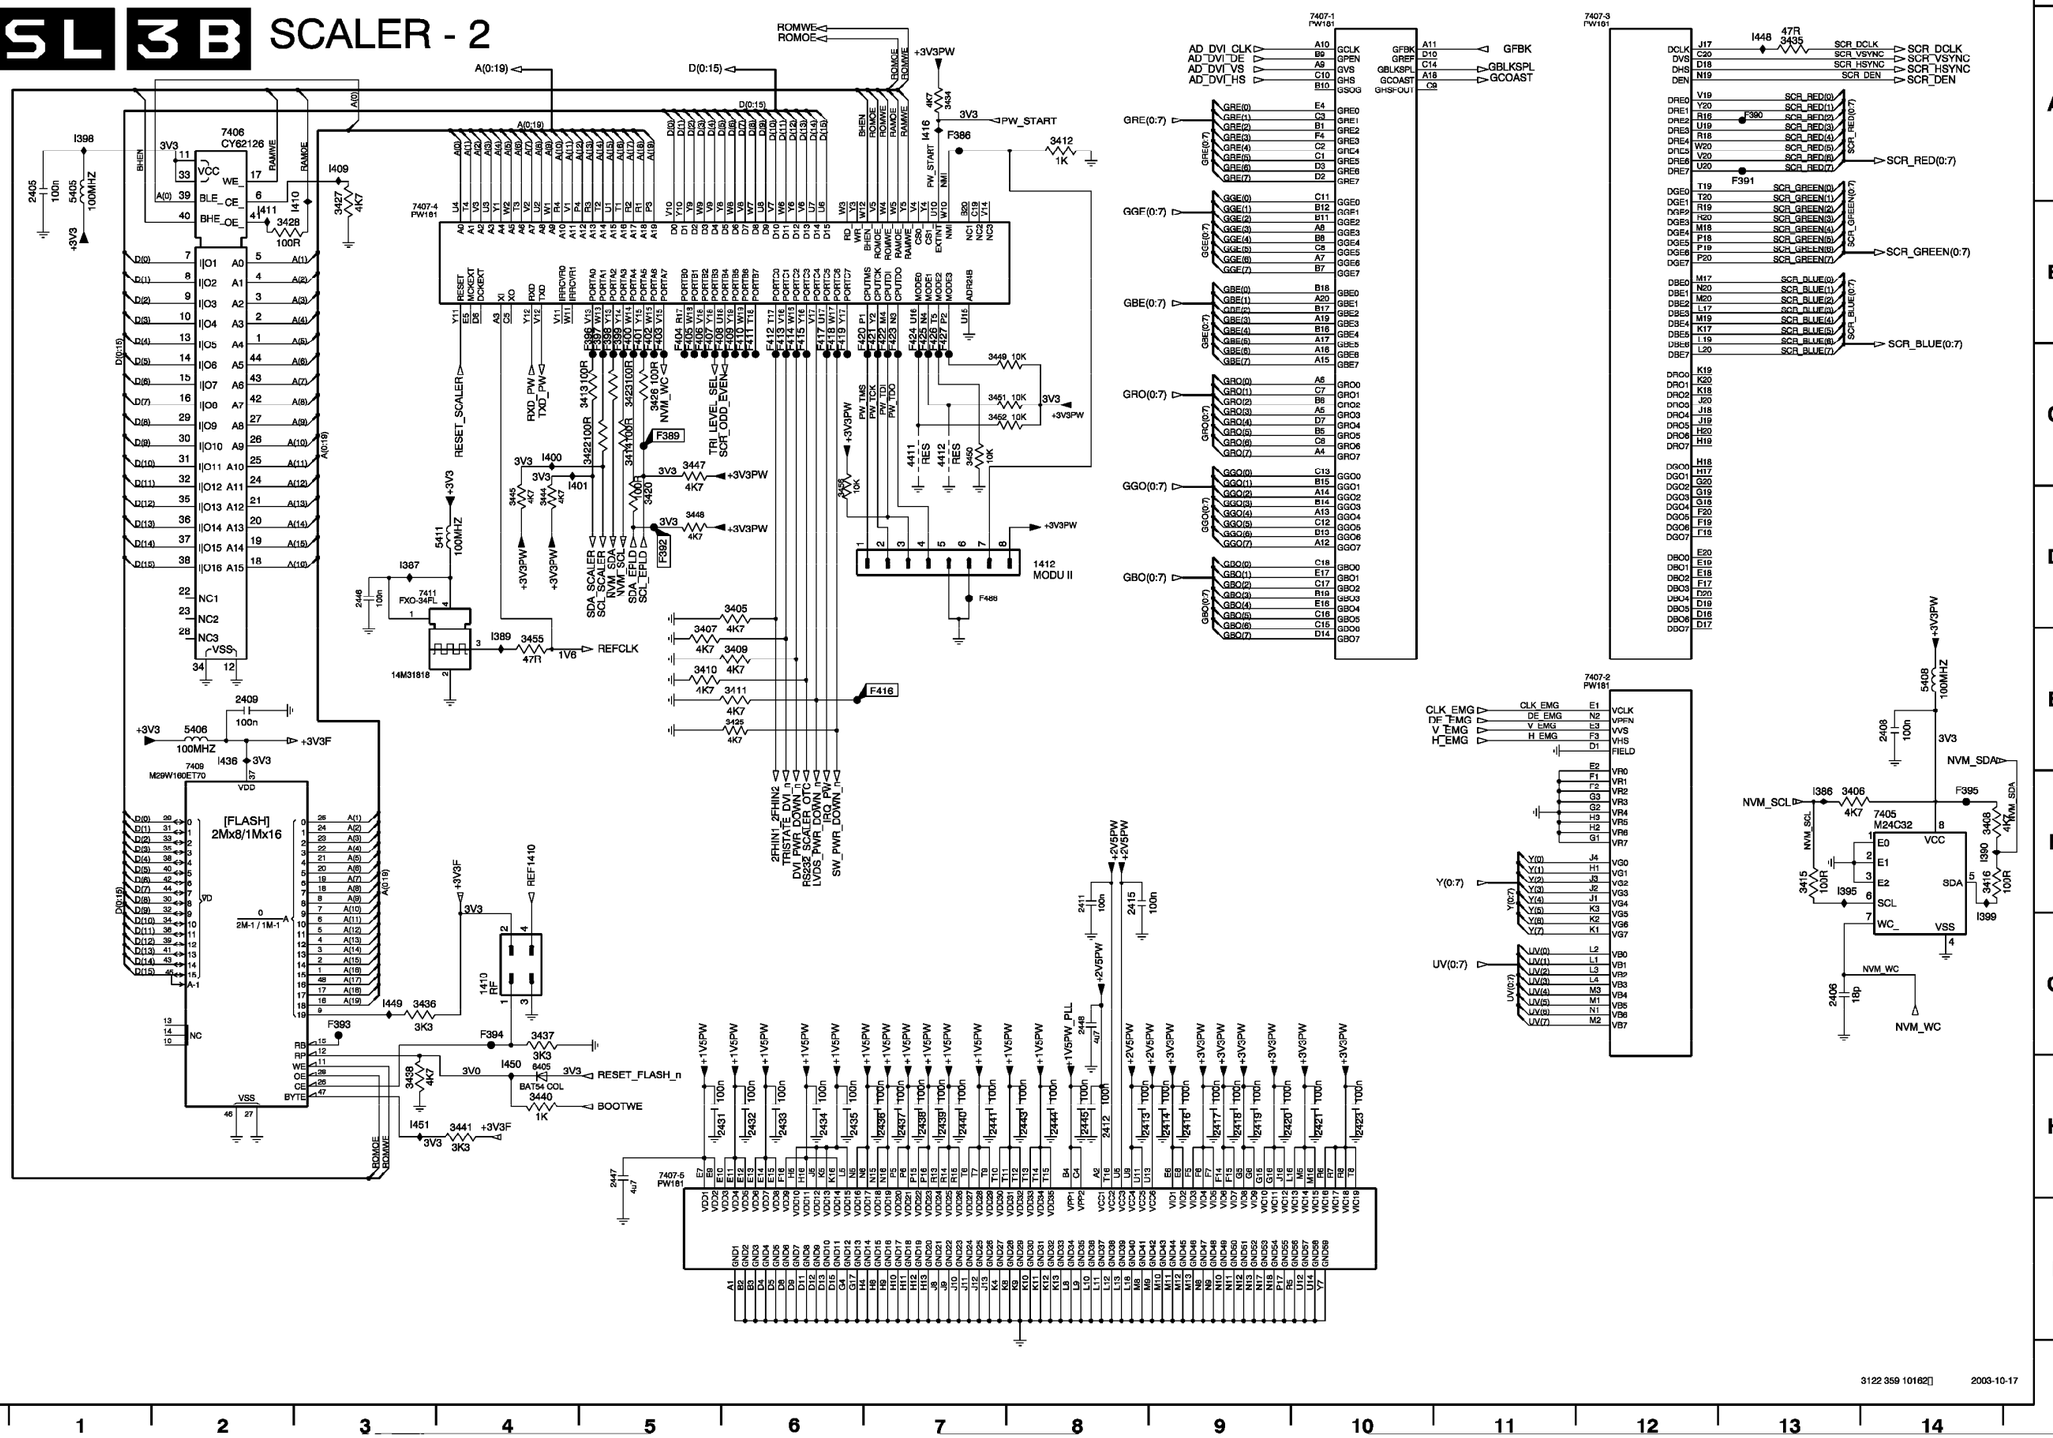

1410 G4	F419 B6
1412 D8	F420 B7
2405 A1	F421 B7
2406 G13	F422 B7
2408 E14	F423 B7
2409 E2	F424 B7
2411 F8	F425 B7
2412 H8	F426 B7
2413 H8	F427 B7
2414 H9	F486 D7
2415 F8	I386 F13
2416 H9	I387 D3
2417 H9	I389 E4
2418 H9	I390 F14
2419 H9	I395 F13
2420 H9	I398 A1
2421 H10	I399 G14
2423 H10	I400 C4
2431 H5	I401 C4
2432 H6	I409 A3
2433 H6	I410 B3
2434 H6	I411 B2
2435 H6	I416 A7
2436 H7	I436 E2
2437 H7	I448 A13
2438 H7	I449 G3
2439 H7	I450 H4
2440 H7	I451 H3
2441 H7	
2443 H8	
2444 H8	
2445 H8	
2446 D3	
2447 H5	
2448 G8	
3405 D6	
3406 F13	
3407 E6	
3408 F14	
3409 E6	
3410 E5	
3411 E6	
3412 A8	
3413 C5	
3414 C5	
3415 F13	
3416 F14	
3420 D5	
3422 C5	
3423 C5	
3425 E6	
3426 C5	
3427 B3	
3428 B2	
3434 A7	
3435 A13	
3436 G3	
3437 G4	
3438 H3	
3440 H4	
3441 H4	
3444 D4	
3445 D4	
3447 C5	
3448 D5	
3449 C7	
3450 C7	
3451 C7	
3452 C7	
3455 E4	
3456 D6	
4411 C7	
4412 C7	
5405 A1	
5406 E2	
5408 E14	
5411 D4	
6405 H4	
7405 F14	
7406 A2	
7407-1 A10	
7407-2 E12	
7407-3 A12	
7407-4 B4	
7407-5 H5	
7409 E2	
7411 D4	
F386 A7	
F389 C6	
F390 A13	
F391 A13	
F392 D5	
F393 G3	
F394 G4	
F395 F14	
F396 B5	
F397 B5	
F398 B5	
F399 B5	
F400 B5	
F401 B5	
F402 B5	
F403 B5	
F404 B5	
F405 B5	
F406 B5	
F407 B5	
F408 B6	
F409 B6	
F410 B6	
F411 B6	
F412 B6	
F413 B6	
F414 B6	
F415 B6	
F416 E7	
F417 B6	
F418 B6	

SL3C SCALER - 3

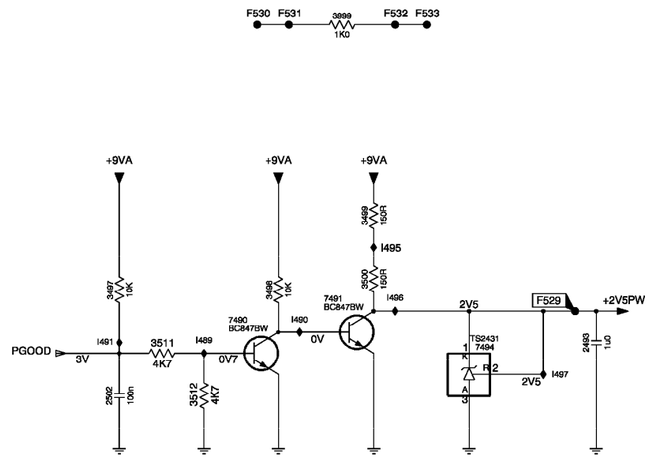

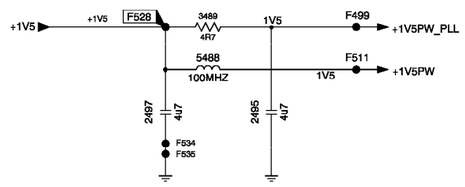



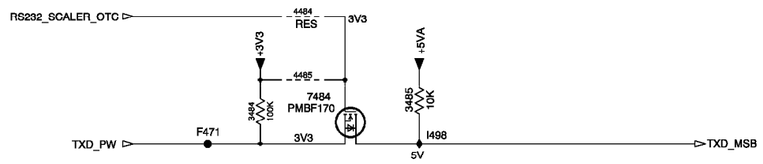

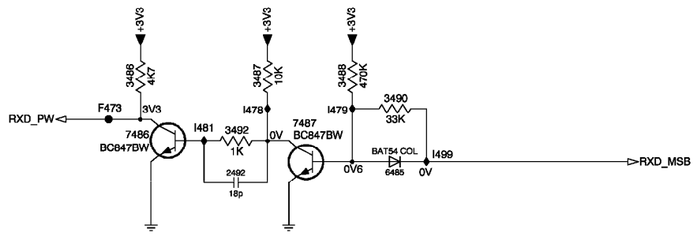

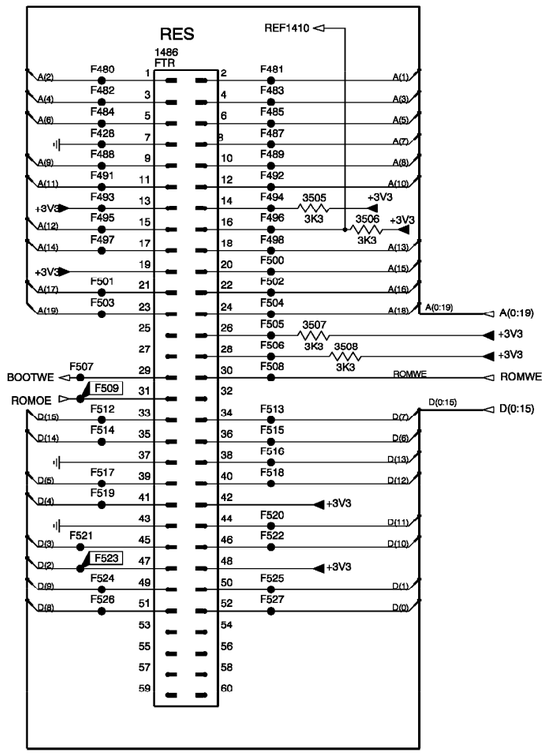

3122 359 10162 2003-10-17

1486 E7
2492 C7
2493 D5
2494 H2
2495 G3
2497 G2
2502 D1
3484 B7
3485 B8
3486 C8
3487 C7
3488 C8
3489 F3
3490 C8
3492 C7
3497 D1
3498 D2
3499 C3
3500 D3
3505 F8
3506 F8
3507 F8
3508 G8
3511 D2
3512 D2
3999 B3
4484 A7
4485 A7
5486 H2
5488 F3
6485 C8
7484 A7
7486 C7
7487 C8
7490 D2
7491 D3
7494 D4
F428 E6
F471 B6
F473 C6
F480 E6
F481 E8
F482 E6
F483 E8
F484 E6
F485 E8
F487 E8
F488 E6
F489 E8
F490 H3
F491 E6
F492 E8
F493 F6
F494 F8
F495 F6
F496 F8
F497 F6
F498 F8
F499 F4
F500 F8
F501 F6
F502 F8
F503 F6
F504 F8
F505 F8
F506 G8
F507 G6
F508 G8
F509 G7
F511 F4
F512 G6
F513 G8
F514 G6
F515 G8
F516 G8
F517 G6
F518 G8
F519 H6
F520 H8
F521 H6
F522 H8
F523 H7
F524 H6
F525 H8
F526 H6
F527 H8
F528 F2
F529 D4
F530 B2
F531 B2
F532 B3
F533 B3
F534 G3
F535 G3
I478 C7
I479 C8
I481 C7
I489 D2
I490 D3
I491 D1
I495 C3
I496 D3
I497 D4
I498 B8
I499 C9

SL 3D LVDS - RECEIVER

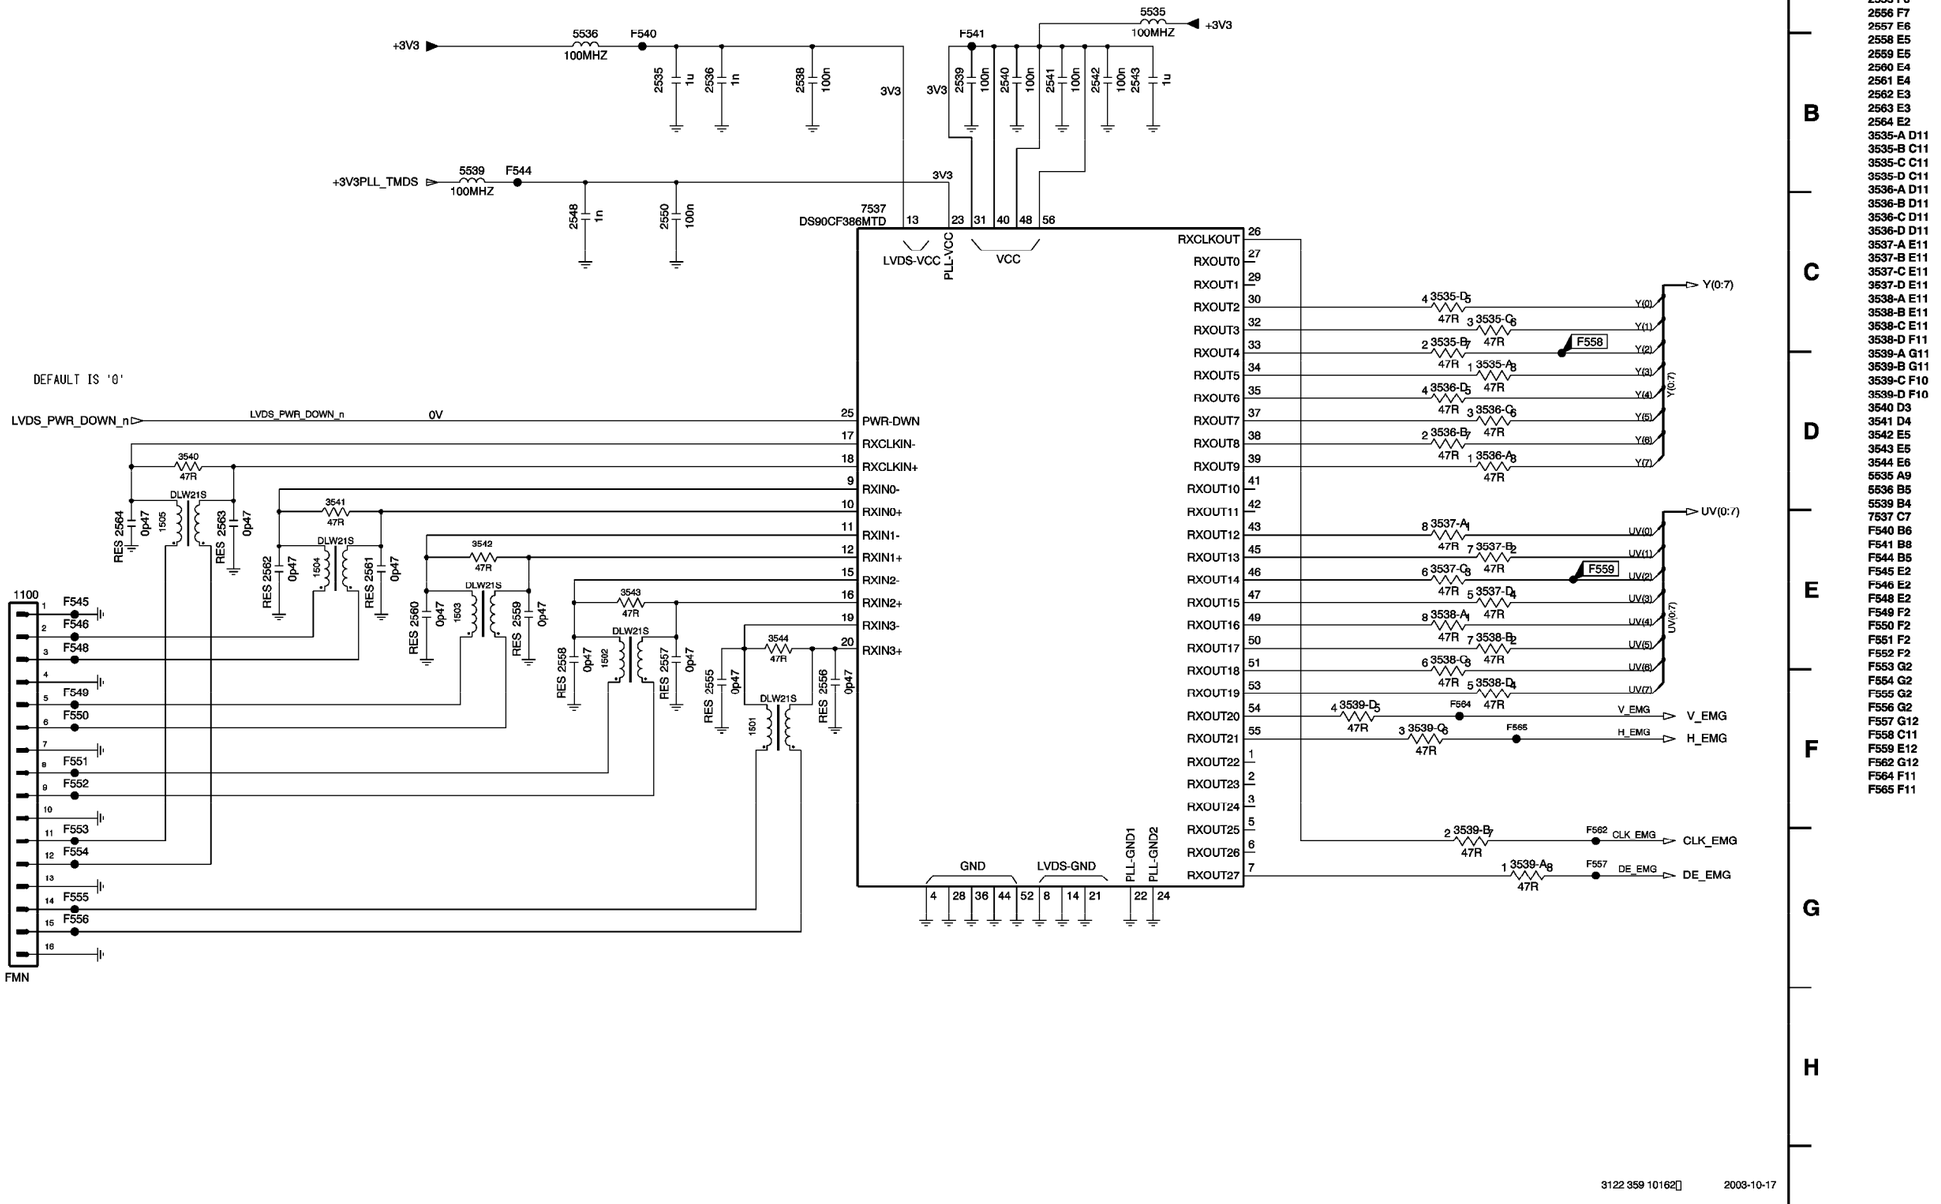

3122 359 10162 2003-10-17

1100 E2
1501 F6
1502 E5
1503 E4
1504 E3
1505 E2
2535 B6
2536 B6
2538 B7
2539 B8
2540 B8
2541 B8
2542 B8
2543 B9
2548 C5
2550 C6
2555 F6
2556 F7
2557 E6
2558 E5
2559 E5
2560 E4
2561 E4
2562 E3
2563 E3
2564 E2
3535-A D11
3535-B C11
3535-C C11
3535-D C11
3536-A D11
3536-B D11
3536-C D11
3536-D D11
3537-A E11
3537-B E11
3537-C E11
3537-D E11
3538-A E11
3538-B E11
3538-C E11
3538-D F11
3539-A G11
3539-B G11
3539-C F10
3539-D F10
3540 D3
3541 D4
3542 E5
3543 E5
3544 E6
5535 A9
5536 B5
5539 B4
7537 C7
F540 B6
F541 B8
F544 B5
F545 E2
F546 E2
F548 E2
F549 F2
F550 F2
F551 F2
F552 F2
F553 G2
F554 G2
F555 G2
F556 G2
F557 G12
F558 C11
F559 E12
F562 G12
F564 F11
F565 F11

SL 4A HD SYNC. SLICER

SYNC SEPARATOR

TRI-LEVEL SYNC SLICER

BI-LEVEL / TRI-LEVEL SELECTION

3122 359 10172
2003-10-17

2582 B7
2583 C6
2584 C5
2585 C5
2586 D1
2587 D3
2588 D5
2590 E8
2593 F11
2594 F8
2595 F6
2596 F7
2598 G4
2599 G5
2600 H11
3581 B6
3582 C2
3583 D1
3584 D2
3585 D2
3586 D2
3587 D8
3588 D5
3589 C3
3590 B4
3591 C4
3593 D3
3595 G5
3597 G5
3598 G4
3599 G5
3603 G5
3604 G10
3605 H11
3606 H12
3607 G12
4580 F11
5581 B8
5582 C5
5583 F11
5584 F8
5585 F6
6581 G10
7581-A B7
7581-B D7
7582 D2
7583 C4
7589-A A11
7589-B B11
7589-C G11
7592 F6
7593-B G9
7593-C G9
7593-D G7
7594 H12
F581 B4
F582 C8
F583 B7
F584 C6
F585 C4
F587 C3
F589 F11
F590 F8
F591 F5
F592 G10
F593 G7
F594 G10
F595 G12
F596 G11
I581 C6
I582 D1
I583 D3
I584 D3
I585 D2
I586 D2
I587 D5
I588 D8
I590 B3
I593 G4
I595 G5
I596 G5
I602 G8
I603 G5
I604 G10

SL 4B HD2 + VGA INPUT

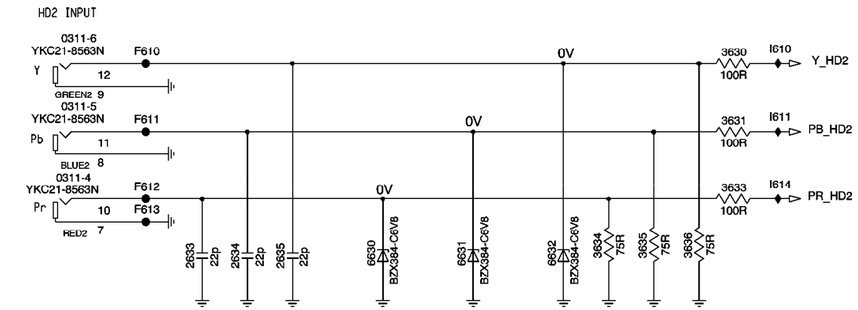

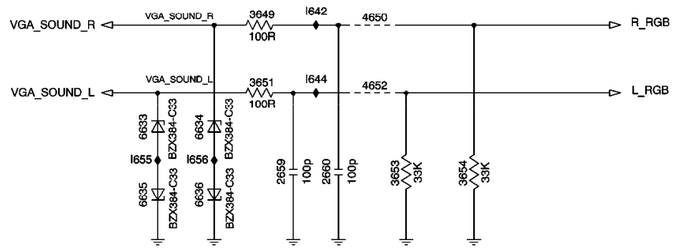

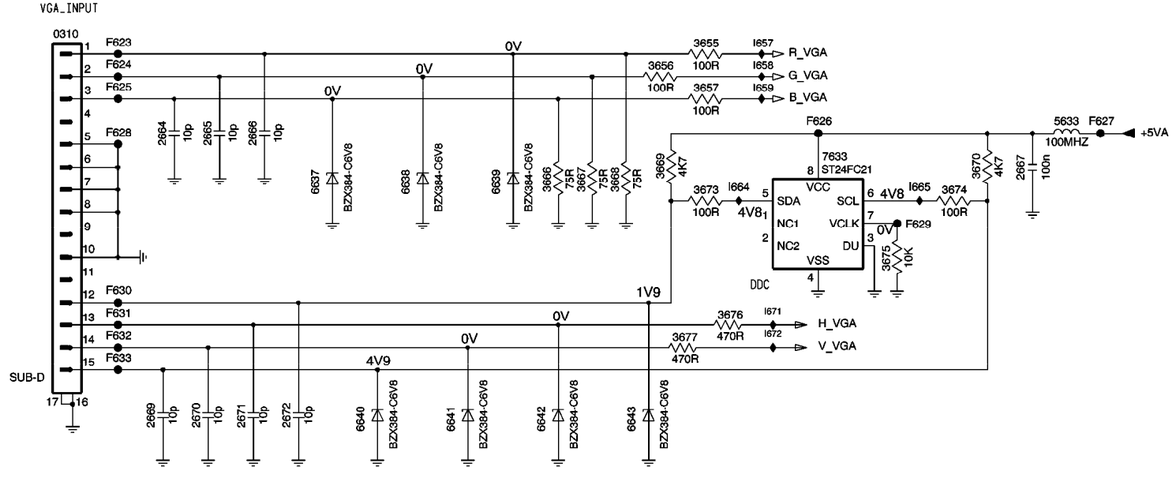

3122 359 10172

2003-10-17

0309-A D4
0309-B D4
0310 F4
0311-A B4
0311-B A4
0311-C A4
2633 B5
2634 B5
2635 B6
2659 E6
2660 E6
2664 F5
2665 F5
2666 F5
2667 G10
2669 H5
2670 H5
2671 H5
2672 H6
3630 A8
3631 A8
3633 B8
3634 B8
3635 B8
3636 B8
3649 D6
3650 D7
3651 D6
3652 D7
3653 E7
3654 E7
3655 F8
3656 F8
3657 F8
3666 G7
3667 G7
3668 G8
3669 G8
3670 G10
3673 G8
3674 G10
3675 G9
3676 H8
3677 H8
5633 F10
6630 B6
6631 B7
6632 B7
6633 E5
6634 E5
6635 E5
6636 E5
6637 G6
6638 G6
6639 G7
6640 H6
6641 H7
6642 H7
6643 H8
7633 G9
F610 A5
F611 A5
F612 B5
F613 B5
F615 D5
F617 D5
F618 E5
F623 F4
F624 F4
F625 F4
F626 F9
F627 F11
F628 F4
F629 G10
F630 G4
F631 H4
F632 H4
F633 H4
I610 A9
I611 A9
I614 B9
I642 D6
I644 D6
I655 E5
I656 E5
I657 F9
I658 F9
I659 F9
I664 G8
I665 G9
I671 H9
I672 H9

SL4C HD1 - 2 SELECTOR

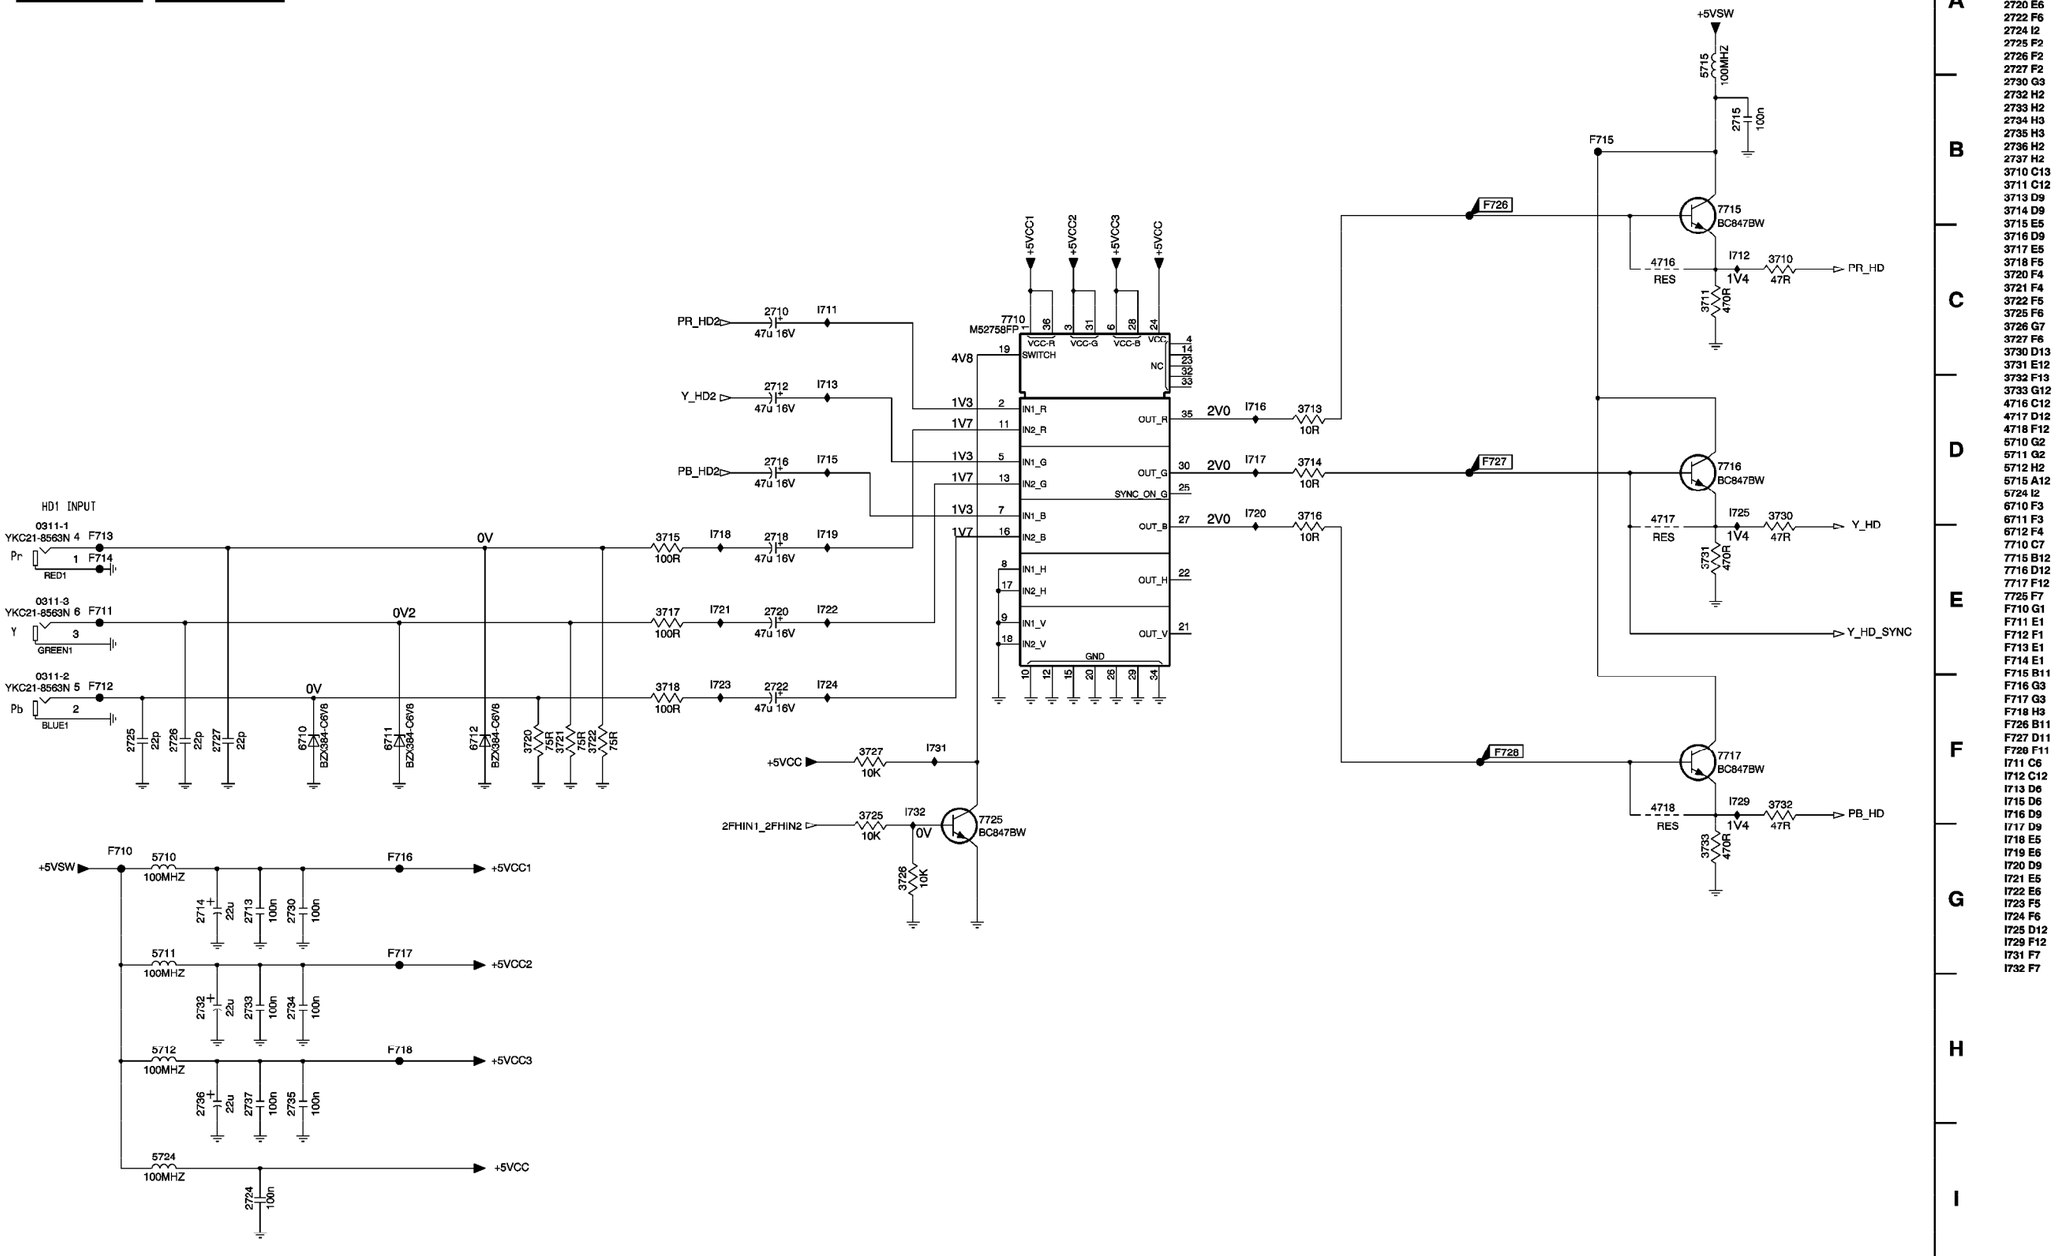

3122 359 10172
2003-10-17

0311-1 D1
0311-2 E1
0311-3 E1
2710 C6
2712 D6
2713 G2
2714 G2
2715 B12
2716 D6
2718 E6
2720 E6
2722 F6
2724 I2
2725 F2
2726 F2
2727 F2
2730 G3
2732 H2
2733 H2
2734 H3
2735 H3
2736 H2
2737 H2
3710 C13
3711 C12
3713 D9
3714 D9
3715 E5
3716 D9
3717 E5
3718 F5
3720 F4
3721 F4
3722 F5
3725 F6
3726 G7
3727 F6
3730 D13
3731 E12
3732 F13
3733 G12
4716 C12
4717 D12
4718 F12
5710 G2
5711 G2
5712 H2
5715 A12
5724 I2
6710 F3
6711 F3
6712 F4
7710 C7
7715 B12
7716 D12
7717 F12
7725 F7
F710 G1
F711 E1
F712 F1
F713 E1
F714 E1
F715 B11
F716 G3
F717 G3
F718 H3
F726 B11
F727 D11
F728 F11
I711 C6
I712 C12
I713 D6
I715 D6
I716 D9
I717 D9
I718 E5
I719 E6
I720 D9
I721 E5
I722 E6
I723 F5
I724 F6
I725 D12
I729 F12
I731 F7
I732 F7

SL5 DVI RECEIVER

PanelLink Receiver

Disable HSYNC de-jitter
Only for SiI169

Clock INV
Only for SiI169

HDCP key only for SiI159

3122 359 10182
2003-10-17

0305 D1	3800 A4
0308-1 I2	3801 A8
0308-2 I2	4745 C6
0308-3 H2	4747 A9
0308-4 H2	4748 A9
1700 G3	4749 A8
1701 F3	4750 B3
1702 E3	4751 B3
1703 C3	4752 C7
2752 I8	4762 G12
2753 I8	4765 G12
2754 I8	4778 H4
2755 I9	4780 H4
2756 I9	4793 C7
2757 I9	4794 C7
2758 F14	4795 C6
2759 A4	5746 H8
2760 I9	5747 A3
2761 I10	5748 F14
2762 I10	5749 A5
2764 C2	5751 H6
2766 I6	5780 A10
2767 B2	6745 G2
2769 I6	6746 G3
2770 I6	6747 F2
2771 I4	6748 F3
2772 I4	6749 E2
2773 I6	6750 E3
2775 E2	6751 C3
2780 A10	6752 B3
2781 A10	6753 D2
2782 G4	6754 D3
2783 G4	6755 A2
2784 F4	6756 A6
2785 F4	6757 H3
2786 E4	6758 H3
2787 E4	6759 I3
2788 D4	6760 I3
2789 D4	6761 A2
2790 A8	7746 A9
3745 A6	7747 A3
3746-A B12	7748 G14
3746-B B12	7749 B5
3746-C B12	7750 C5
3746-D B12	F615 I2
3747-A B12	F617 I2
3747-B B12	F618 I2
3747-C B12	F740 G1
3747-D B12	F741 G1
3748-A B12	F743 F1
3748-B B12	F744 F1
3748-C B12	F746 E2
3748-D C12	F748 E1
3749-A C12	F749 D1
3749-B C12	F750 D1
3749-C C12	F751 D1
3749-D C12	F752 E1
3750-A C12	F753 H10
3750-B C12	F754 C1
3750-C C12	F755 C1
3750-D C12	F756 F13
3751-A C12	F757 A3
3751-B C12	F759 G13
3751-C C12	F760 B4
3751-D C12	F764 H7
3752-A D12	F765 H2
3752-B D12	F766 H2
3752-C D12	F767 H2
3752-D D12	F770 G10
3753-A D12	F775 C14
3753-B D12	F776 C13
3753-C D12	F777 C13
3753-D D12	F778 C14
3754-A D12	F779 B13
3754-B D12	F780 B13
3754-C D12	F781 B14
3754-D D12	F782 B13
3755-A D12	F783 B13
3755-B D12	F784 E14
3755-C E12	F785 E13
3755-D E12	F786 E13
3756-A E12	F787 D14
3756-B E12	F788 D13
3756-C E12	F789 D13
3756-D E12	F790 D14
3757-A E12	F791 D13
3757-B E12	F792 D13
3757-C E12	F793 E13
3757-D E12	F794 E13
3758-A F11	F795 F13
3758-B F12	F796 F13
3758-C E12	F817 G12
3758-D E11	F818 G12
3759 F13	F861 F11
3760 C6	I740 B7
3761 C6	I748 C8
3762 F12	I752 B7
3763 G13	I755 B6
3764 G12	I756 C6
3765 F12	I769 A2
3766 F14	I770 E14
3767 A3	I771 C7
3768 B3	I775 B4
3769 B6	I776 G13
3770 C6	I777 G13
3777 H3	I780 B3
3779 H3	I782 A5
3781 I4	I784 A9
3782 I5	I789 A8
3790 C8	I791 B8
3792 A7	I795 H5
3793 A7	I798 H4
3794 A7	I799 H5
3795 A6	I804 E11
3797 A5	I805 H4
3798 B5	I807 H5
3799 B4	I812 I3
	I813 I3
	I814 C6
	I816 A10
	I819 G14

SL 6 DC - CONVERTER

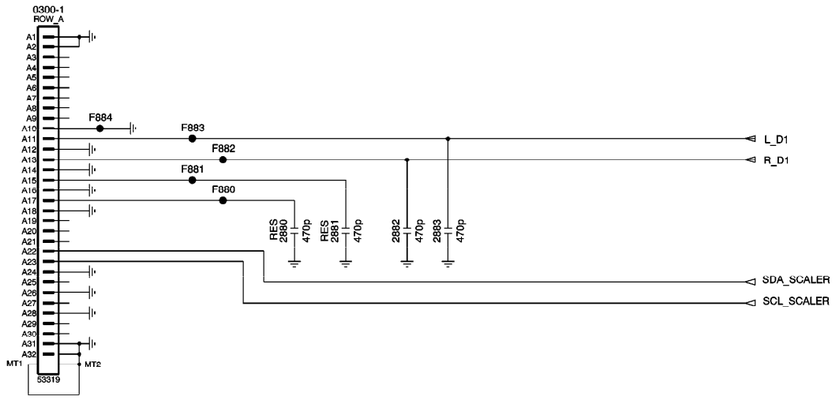



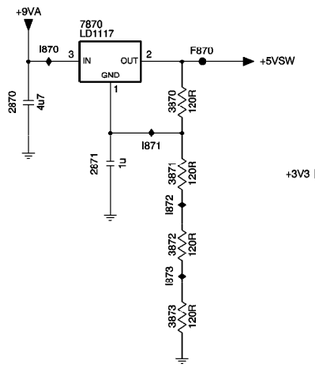

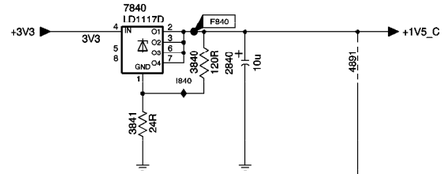

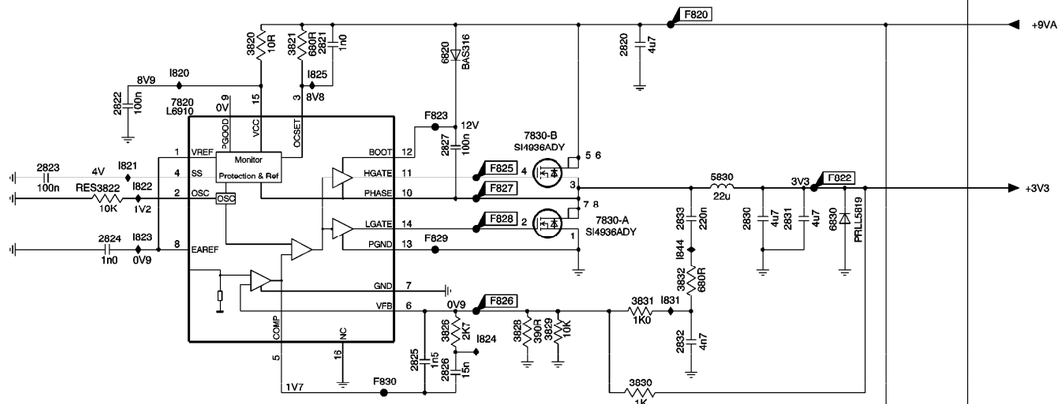

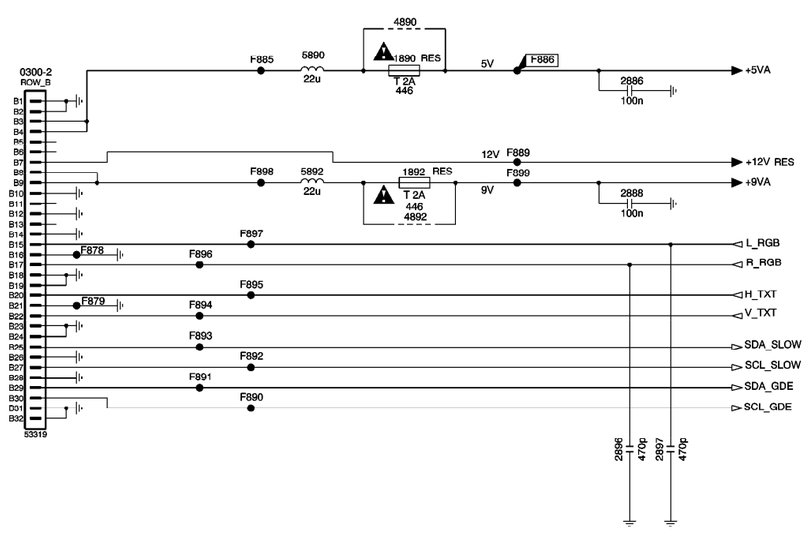

3122 359 10192
2003-10-17

0300-1 A1
0300-2 F1
1820 A8
1821 B8
1890 F4
1892 F4
2820 D11
2821 D9
2822 D8
2823 E7
2824 E8
2825 F10
2826 F10
2827 E10
2830 E12
2831 E13
2832 F12
2833 E12
2840 B13
2850 G11
2851 G9
2852 G8
2853 H7
2854 H8
2855 I10
2856 I10
2857 H10
2860 H12
2861 H13
2862 I12
2863 H12
2870 A9
2871 B10
2880 B3
2881 B3
2882 B4
2883 B4
2886 F6
2888 G6
2896 H5
2897 H6
3820 D9
3821 D9
3822 E8
3826 F10
3828 F11
3829 F11
3830 F12
3831 F12
3832 F12
3840 B13
3841 B12
3850 G9
3851 G9
3852 H8
3856 I10
3858 I11
3859 I11
3860 I11
3861 I12
3862 I12
3870 A11
3871 B11
3872 B11
3873 C11
4890 E4
4891 B14
4892 G4
5830 E12
5860 H12
5890 F3
5892 F3
6820 D10
6830 E13
6850 G10
6860 H13
7820 D8
7830-A E11
7830-B E11
7840 B12
7850 G8
7860-A H11
7860-B H11
7870 A10
F820 D12
F822 E13
F823 E10
F825 E11
F826 F11
F827 E11
F828 E11
F829 E10
F830 F10
F840 B13
F852 H13
F853 H10
F855 H11
F856 I11
F857 H11
F858 H11
F859 H10
F860 I10
F862 H13
F863 H12
F870 A11
F878 G2
F879 G2
F880 B3
F881 B2
F882 B3
F883 B2
F884 B2
F885 F3
F886 F5
F889 F5
F890 H3
F891 H3
F892 H3
F893 H3
F894 G3
F895 G3
F896 G3
F897 G3
F898 F3
F899 F5
I820 D8
I821 E8
I822 E8
I823 E8
I824 F10
I825 D9
I831 F12
I840 B13
I844 E12
I850 G9
I851 H8
I852 H8
I853 H8
I854 I10
I855 G9
I861 I12
I862 H12
I870 A10
I871 B10
I872 B11
I873 B11

F 1 DWPIP PANEL

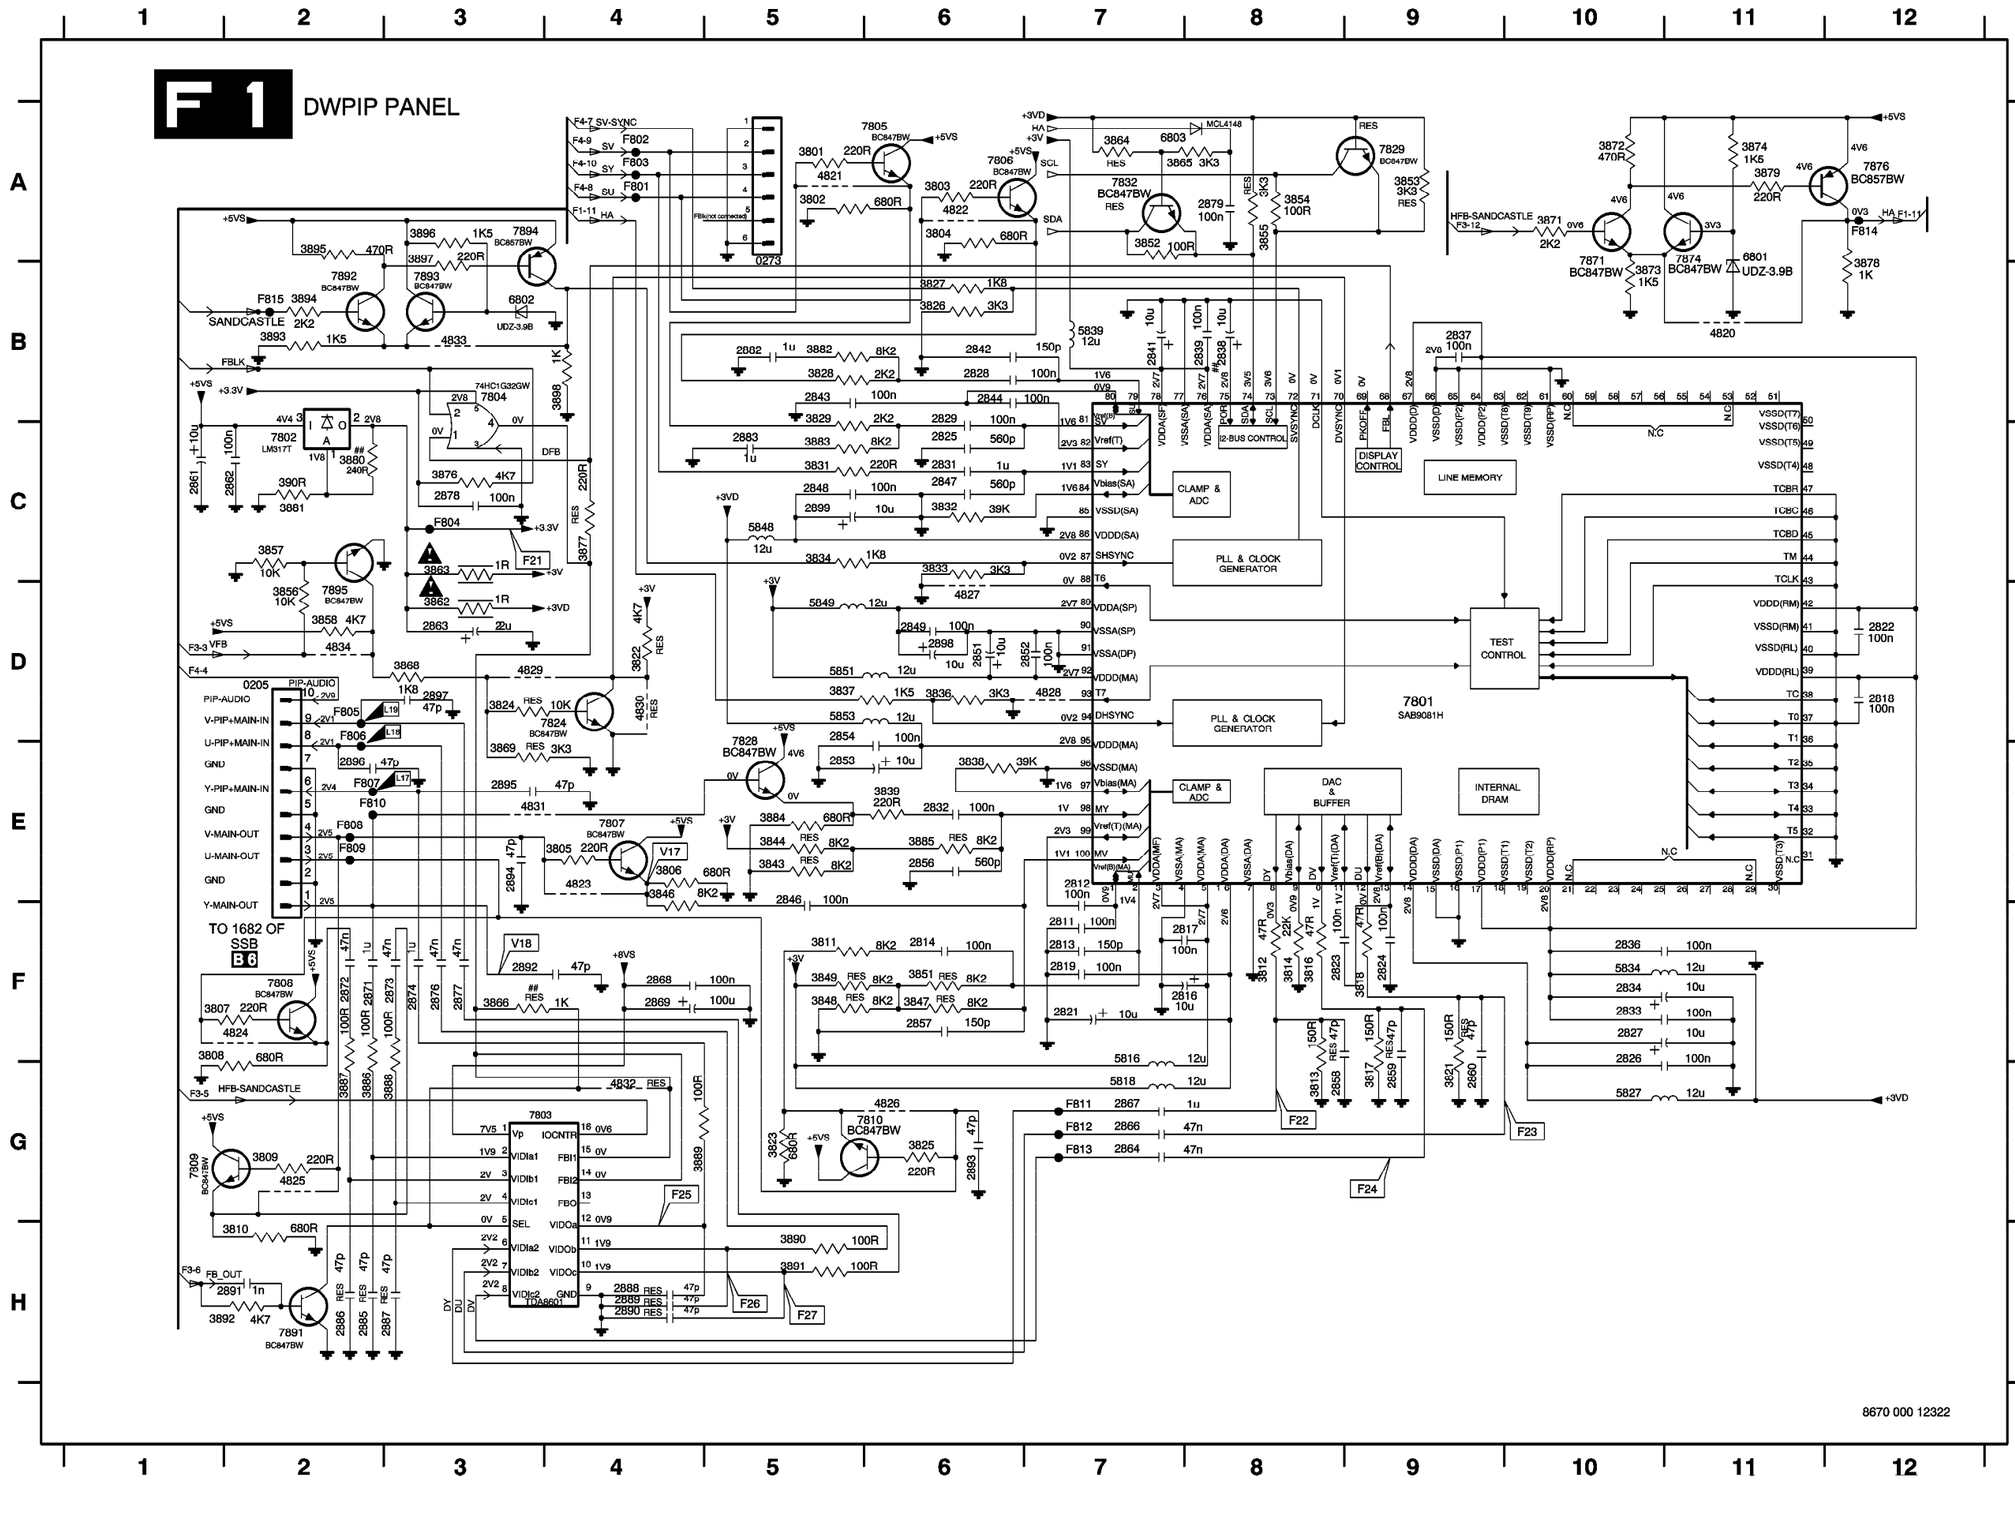

0205 D2	3832 C6	F801 A4
0273 B5	3833 C6	F802 A4
2811 F7	3834 C5	F803 A4
2812 E7	3836 D6	F804 C3
2813 F7	3837 D5	F805 D2
2814 F6	3838 E6	F806 D2
2816 F8	3839 E6	F807 E2
2817 F8	3843 E5	F808 E2
2818 D12	3844 E5	F809 E2
2819 F7	3846 E4	F810 E2
2821 F7	3847 F6	F811 G7
2822 D12	3848 F5	F812 G7
2823 F8	3849 F5	F813 G7
2824 F9	3851 F6	F814 A12
2825 C6	3852 A7	F815 B2
2826 G10	3853 A9	
2827 F10	3854 A8	
2828 B6	3855 A8	
2829 C6	3856 D2	
2831 C6	3857 C2	
2832 E6	3858 D2	
2833 F10	3862 D3	
2834 F10	3863 C3	
2836 F10	3864 A7	
2837 B9	3865 A7	
2838 B8	3866 F3	
2839 B8	3868 D3	
2841 B7	3869 E3	
2842 B6	3871 A10	
2843 B5	3872 A10	
2844 B6	3873 B10	
2846 F5	3874 A11	
2847 C6	3876 C3	
2848 C5	3877 C4	
2849 D6	3878 B12	
2851 D6	3879 A11	
2852 D7	3880 C2	
2853 E5	3881 C2	
2854 D5	3882 B5	
2856 E6	3883 C5	
2857 F6	3884 E5	
2858 G8	3885 E6	
2859 G9	3886 G2	
2860 G9	3887 G2	
2861 C1	3888 G3	
2862 C2	3889 G4	
2863 D3	3890 H5	
2864 G7	3891 H5	
2866 G7	3892 H1	
2867 G7	3893 B2	
2868 F4	3894 B2	
2869 F4	3895 A2	
2871 F2	3896 A3	
2872 F2	3897 B3	
2873 F3	3898 B4	
2874 F3	4820 B11	
2876 F3	4821 A5	
2877 F3	4822 A6	
2879 A8	4823 E4	
2882 B5	4824 F2	
2883 C5	4825 G2	
2885 H2	4826 G6	
2886 H2	4827 D6	
2887 H2	4828 D7	
2888 H4	4829 D3	
2889 H4	4830 D4	
2890 H4	4831 E3	
2891 H2	4832 G4	
2892 F3	4833 B3	
2893 G6	4834 D2	
2894 E3	5816 G7	
2895 E3	5818 G7	
2896 E2	5827 G10	
2897 D3	5834 F10	
2898 D6	5839 B7	
2899 C5	5848 C5	
3801 A5	5849 D5	
3802 A5	5851 D5	
3803 A6	5853 D5	
3804 A6	6801 A11	
3805 E4	6802 B3	
3806 E4	6803 A7	
3807 F1	7801 D9	
3808 F1	7802 C2	
3809 G2	7803 G3	
3810 H2	7804 B3	
3811 F5	7805 A5	
3812 F8	7806 A6	
3813 G8	7807 E4	
3814 F8	7808 F2	
3816 F8	7809 G1	
3817 G9	7810 G5	
3818 F9	7824 D3	
3821 G9	7828 D5	
3822 D4	7829 A9	
3823 G5	7832 A7	
3824 D3	7871 B10	
3825 G6	7874 B11	
3826 B6	7876 A12	
3827 B6	7891 H2	
3828 B5	7892 B2	
3829 C5	7893 B3	
3631 C5	7894 A3	
	7895 D2	

F2 TUNER

0255 C4
2261 C1
2262 C2
2265 A3
2269 D5
3263 A2
3264 A2
3265 B2
3267 D3
3268 D3
3270 C2
5262 B1
7201 B3
F201 A2

F4-13 AGC
3264 10K
F201
F1
2265 100u
3263 3K9 RES
3265 4K7 RES
+5VS
5262 5u6
2261 100u
2262 1n
0R RES 3270
2 0V 3 VT AS
6 8 NC
4V5 7 VSPLL
7201
UV1316/A I-2
IF1
11 0V
F2
IF-TER F4-15
IF2|GND 10
SCL SDA AGC VST GND
3V4 4
3V9 5
1V3 1
4V8
9
12 13 14 15
1 0255
100R 3268
100R 3267
SCL
SDA
33V
+33V
2269 47n

F3 I/O PROCESSING

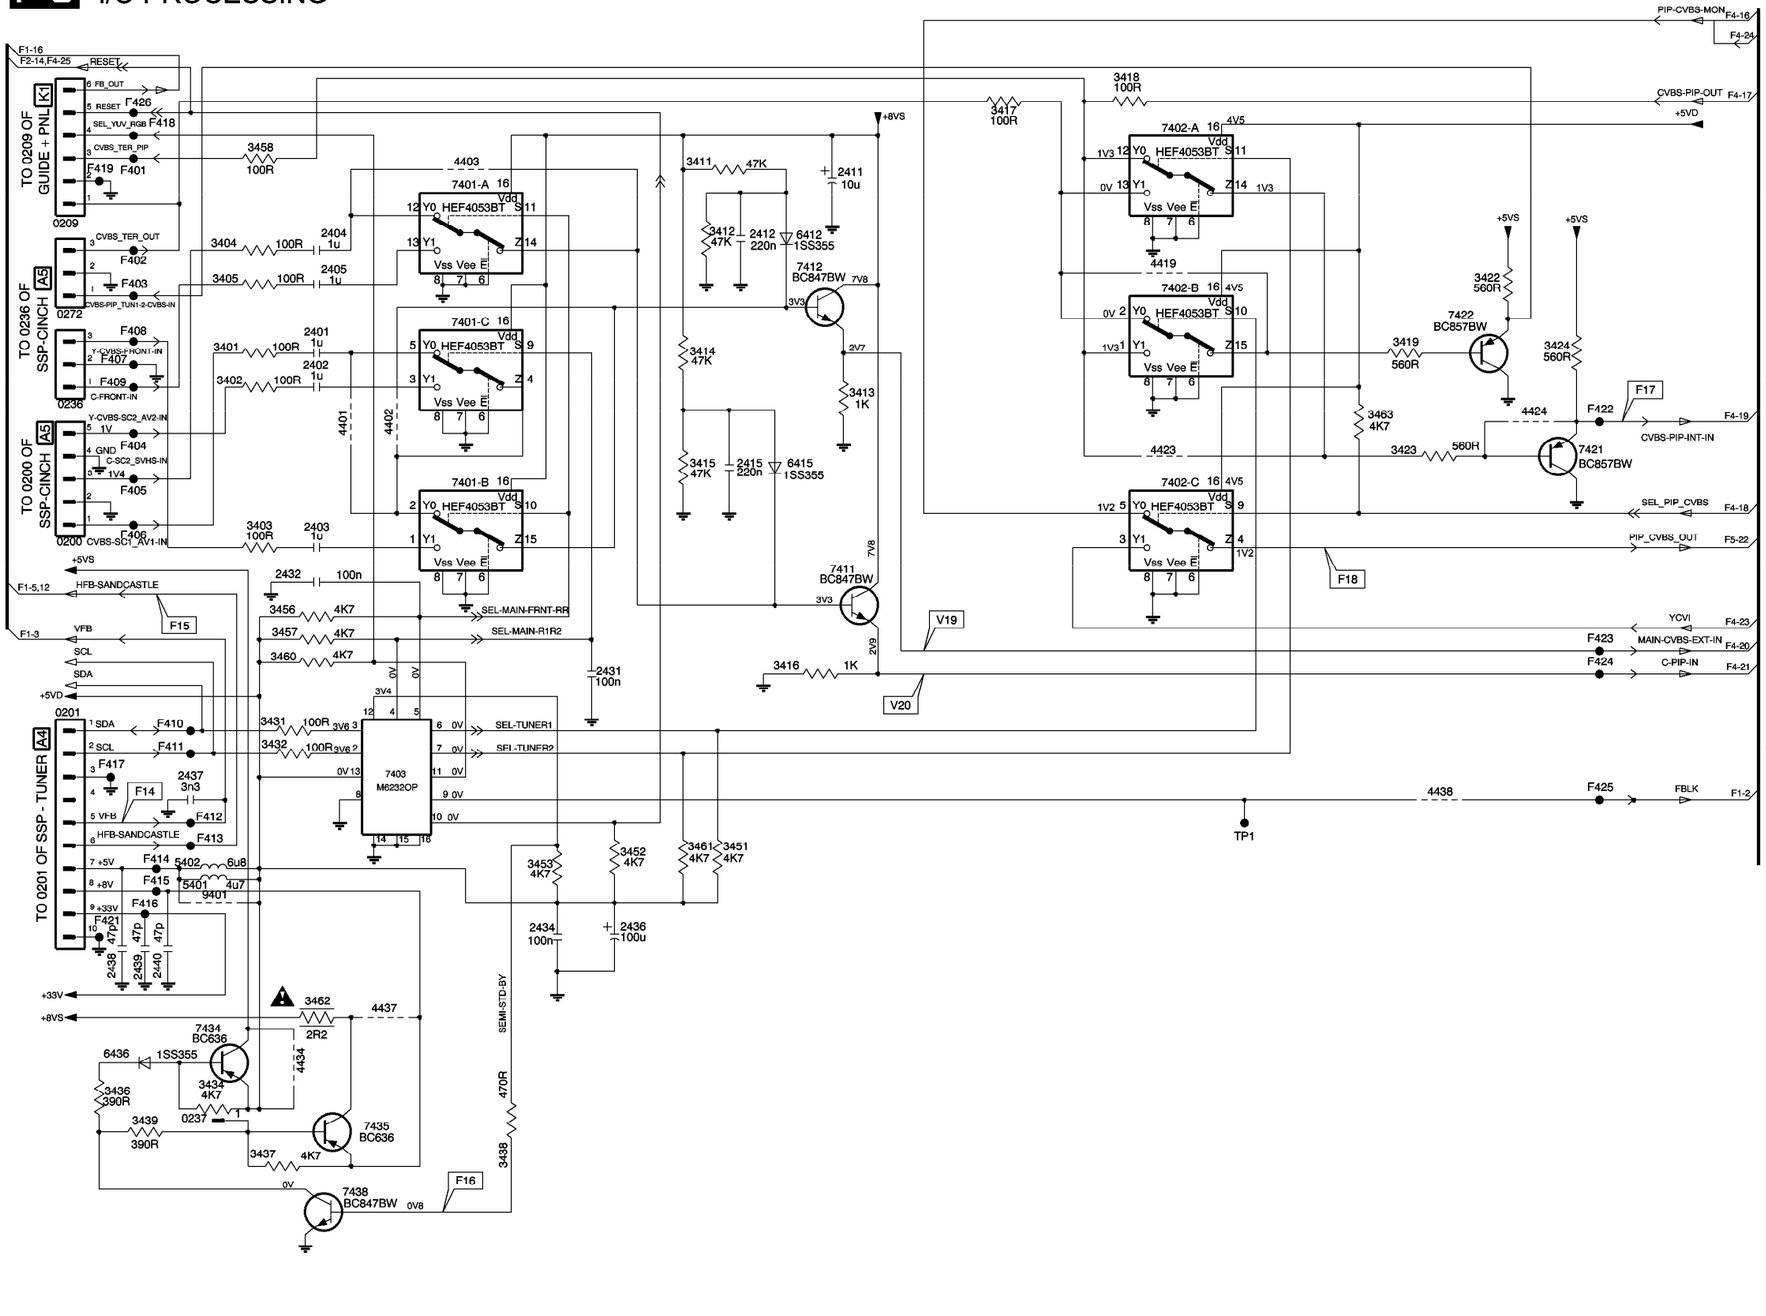

TP1 F9
0200 D2
0201 E2
0209 B2
0236 C2
0237 H2
0272 C1
2401 C3
2402 C3
2403 D3
2404 B3
2405 B3
2411 B6
2412 B6
2415 C6
2431 E5
2432 D3
2434 F4
2436 F5
2437 E2
2438 G2
2439 G2
2440 G2
3401 C3
3402 C3
3403 D3
3404 B2
3405 B3
3411 B5
3412 B6
3413 C6
3414 C5
3415 C5
3416 E6
3417 A7
3418 A8
3419 C10
3422 B10
3423 C10
3424 C11
3431 E3
3432 E3
3434 G2
3436 G2
3437 H3
3438 H4
3439 H2
3451 F6
3452 F5
3453 F4
3456 D3
3457 E3
3458 B3
3460 E3
3461 F5
3462 G3
3463 C10
4401 C3
4402 C4
4403 B4
4419 B8
4423 C8
4424 C11
4434 G3
4437 G3
4438 F10
5401 F2
5402 F2
6412 B6
6415 C6
6436 G2
7401-A B4
7401-B D4
7401-C C4
7402-A A8
7402-B B8
7402-C D8
7403 E4
7411 D6
7412 B6
7421 C11
7422 C10
7434 G2
7435 H3
7438 H3
9401 F2
F401 B2
F402 B2
F403 B2
F404 C2
F405 D2
F406 D2
F407 C2
F408 C2
F409 C2
F410 E2
F411 E2
F412 F2
F413 F2
F414 F2
F415 F2
F416 F2
F417 E2
F418 A2
F419 B2
F421 F2
F422 C11
F423 E11
F424 E11
F425 F11
F426 A2

F 4 IF-VIDEO-SYNC

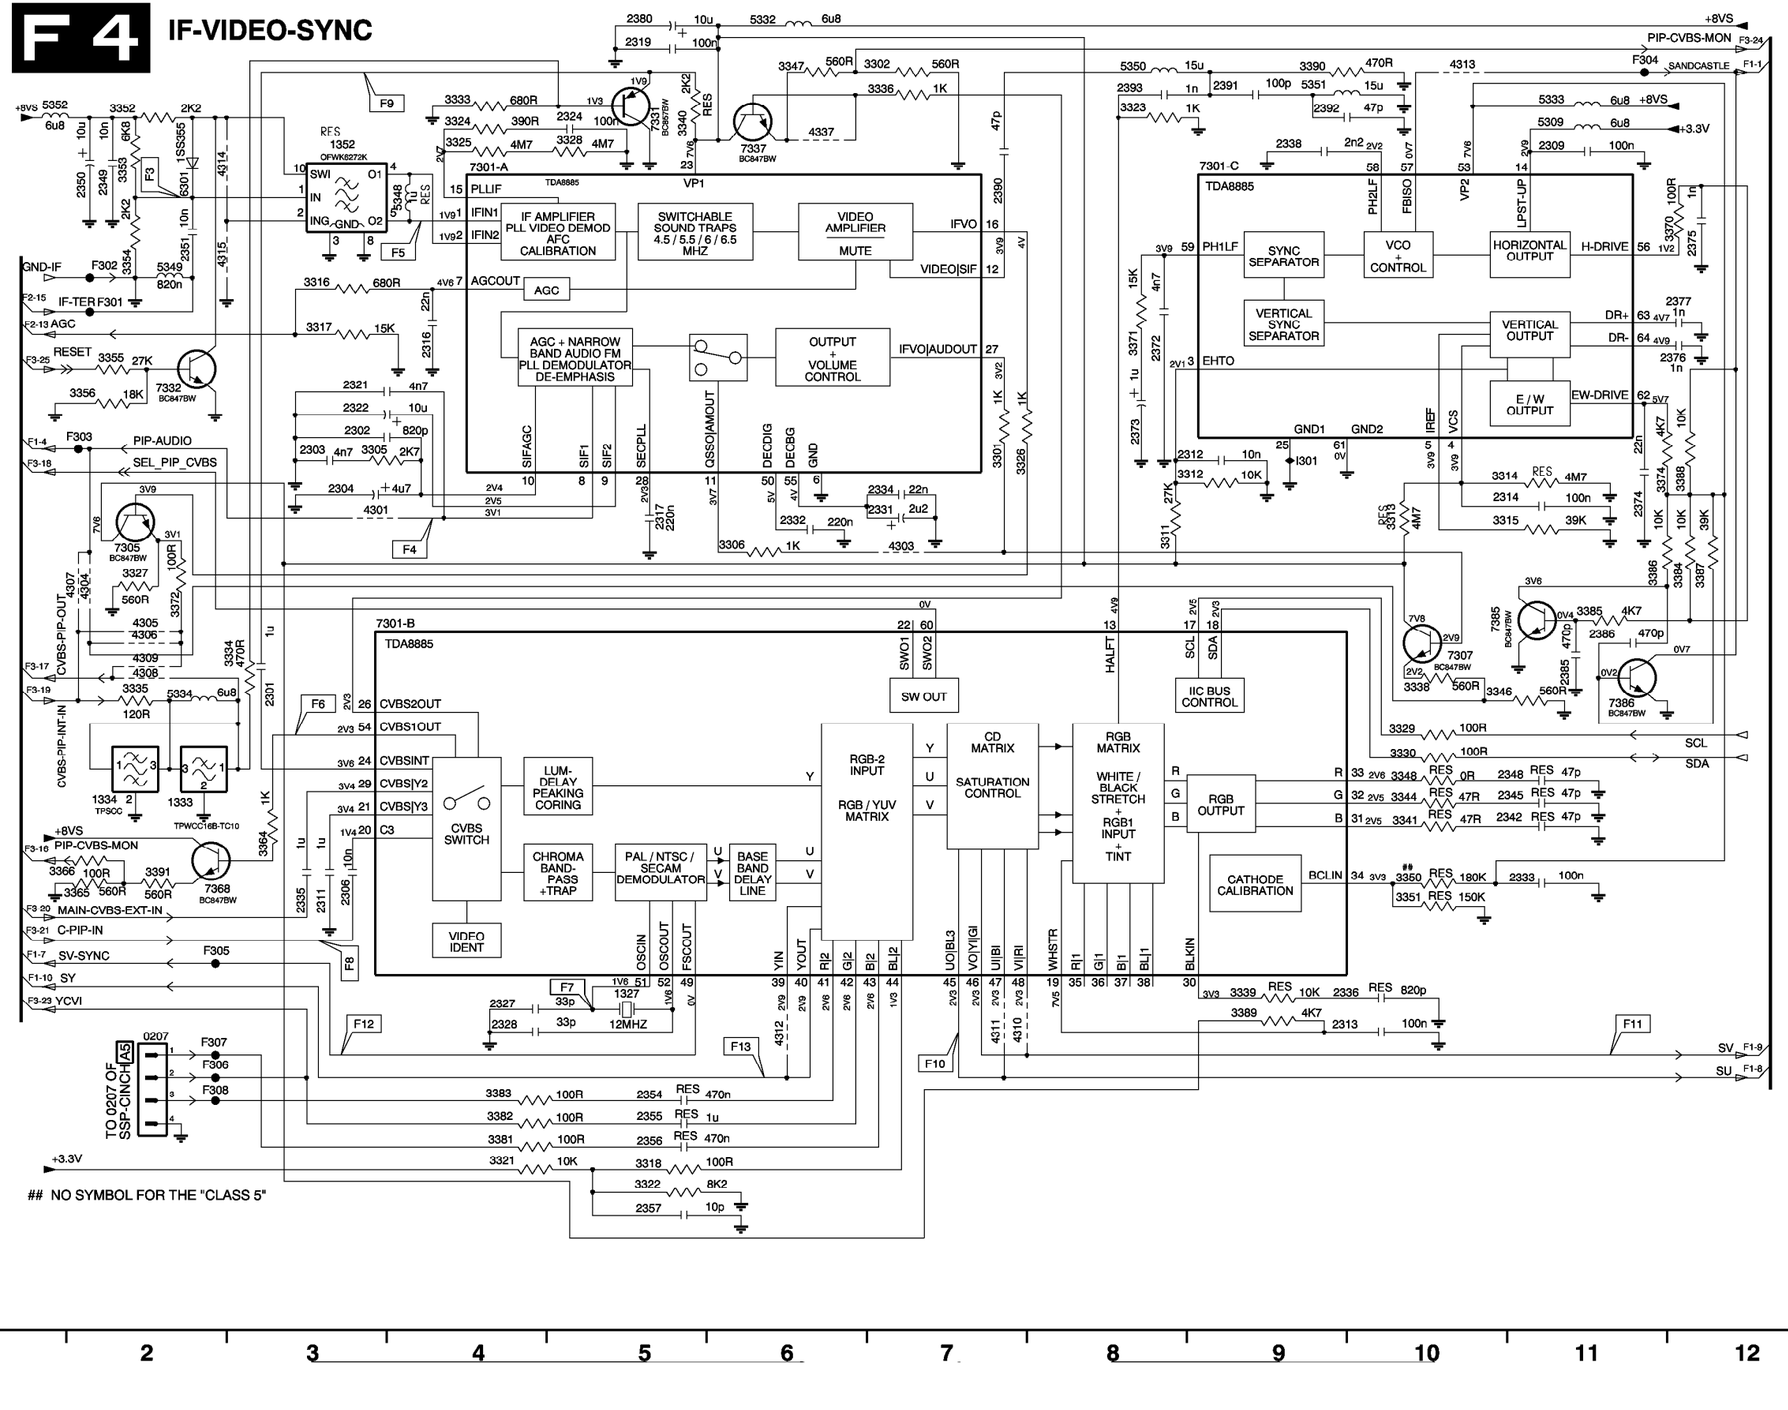

0207 G2	3384 D12
1327 G5	3385 D11
1333 F2	3386 D11
1334 F2	3387 D12
1352 B3	3388 D12
2301 E3	3389 G9
2302 C3	3390 A9
2303 C3	3391 F2
2304 D3	4301 D3
2306 F3	4303 D7
2309 B11	4304 D2
2311 F3	4305 D2
2312 C9	4306 E2
2313 G9	4307 D2
2314 D10	4308 E2
2316 C4	4309 E2
2317 D5	4310 G7
2319 A5	4311 G7
2321 C3	4312 G6
2322 C3	4313 A10
2324 A5	4314 B2
2327 G4	4315 B2
2328 G4	4337 A6
2331 D7	5309 A11
2332 D6	5332 A6
2333 F11	5333 A11
2334 D7	5334 E2
2335 F3	5348 B4
2336 G9	5349 B2
2338 A9	5350 A8
2342 F11	5351 A9
2345 F11	5352 A1
2348 E11	6301 B2
2349 B2	7301-A B4
2350 B2	7301-B E3
2351 B2	7301-C B9
2354 G5	7305 D2
2355 H5	7307 E10
2356 H5	7331 A5
2357 H5	7332 C2
2372 C8	7337 A6
2373 C8	7368 F3
2374 D11	7385 D10
2375 B12	7386 E11
2376 C12	F301 B2
2377 B12	F302 B2
2380 A5	F303 C2
2385 E11	F304 A11
2386 E11	F305 G2
2390 B7	F306 G2
2391 A9	F307 G2
2392 A9	F308 G2
2393 A8	I301 C9
3301 C7	
3302 A7	
3305 C3	
3306 D6	
3311 D8	
3312 D9	
3313 D10	
3314 D10	
3315 D10	
3316 B3	
3317 C3	
3318 H5	
3321 H4	
3322 H5	
3323 A8	
3324 A4	
3325 A4	
3326 C7	
3327 D2	
3328 A5	
3329 E10	
3330 E10	
3333 A4	
3334 E3	
3335 E2	
3336 A7	
3338 E10	
3339 G9	
3340 A5	
3341 F10	
3344 F10	
3346 E10	
3347 A6	
3348 E10	
3350 F10	
3351 F10	
3352 A2	
3353 B2	
3354 B2	
3355 C2	
3356 C2	
3364 F3	
3365 F2	
3366 F1	
3370 B12	
3371 C8	
3372 D2	
3374 D11	
3381 H4	
3382 H4	
3383 G4	

F 5

V CHIP PROCESSOR

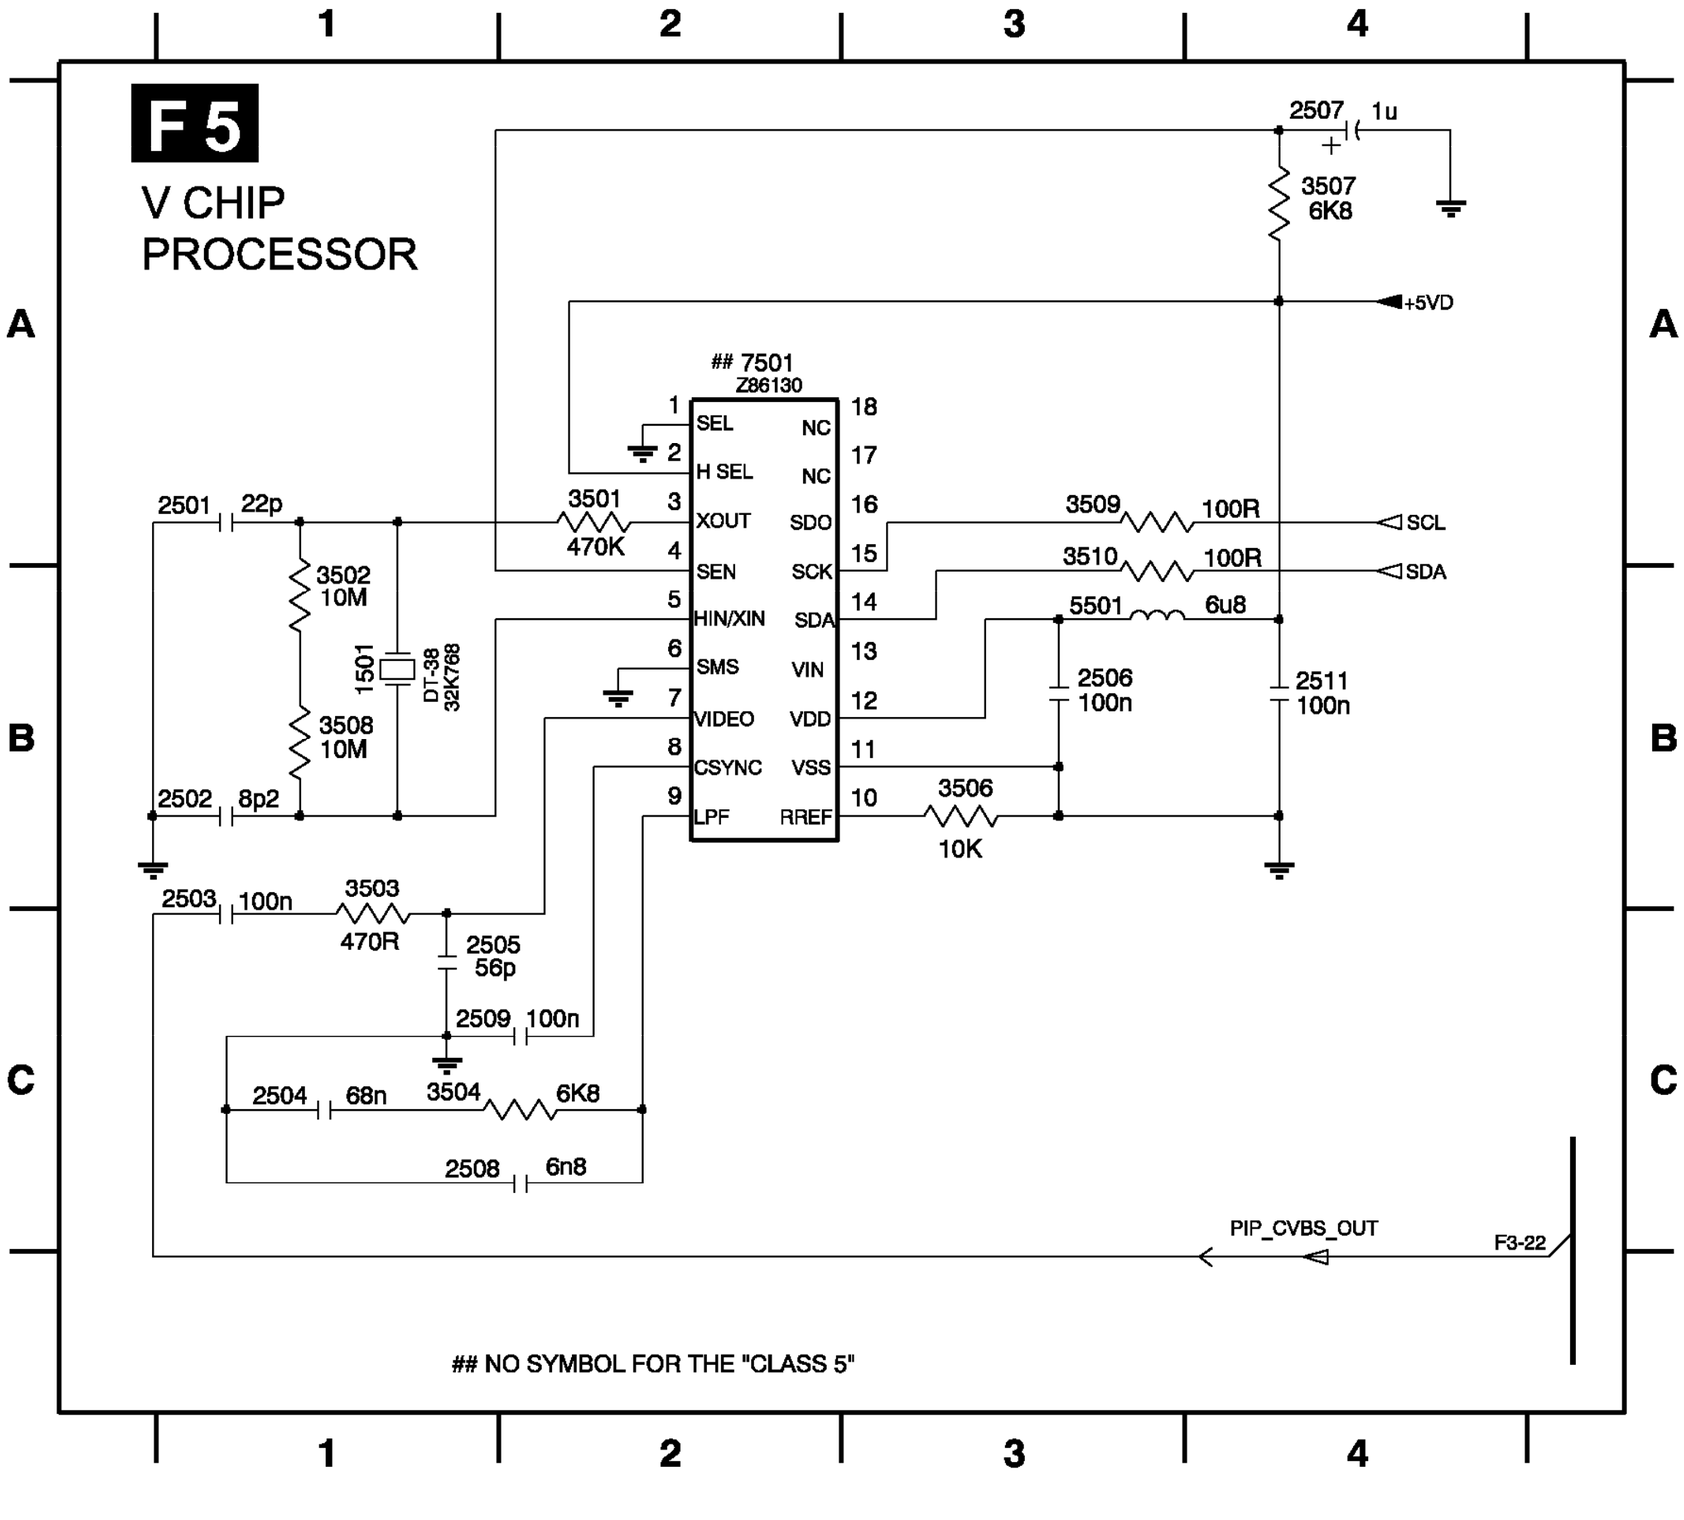

1501 B1
2501 A1
2502 B1
2503 B1
2504 C1
2505 C1
2506 B3
2507 A4
2508 C1
2509 C1
2511 B4
3501 A2
3502 A1
3503 B1
3504 C1
3506 B3
3507 A4
3508 B1
3509 A3
3510 A3
5501 B3
7501 A2

F 6 NV ROM

2512 A3
3512 B1
3513 B3
7502 A2

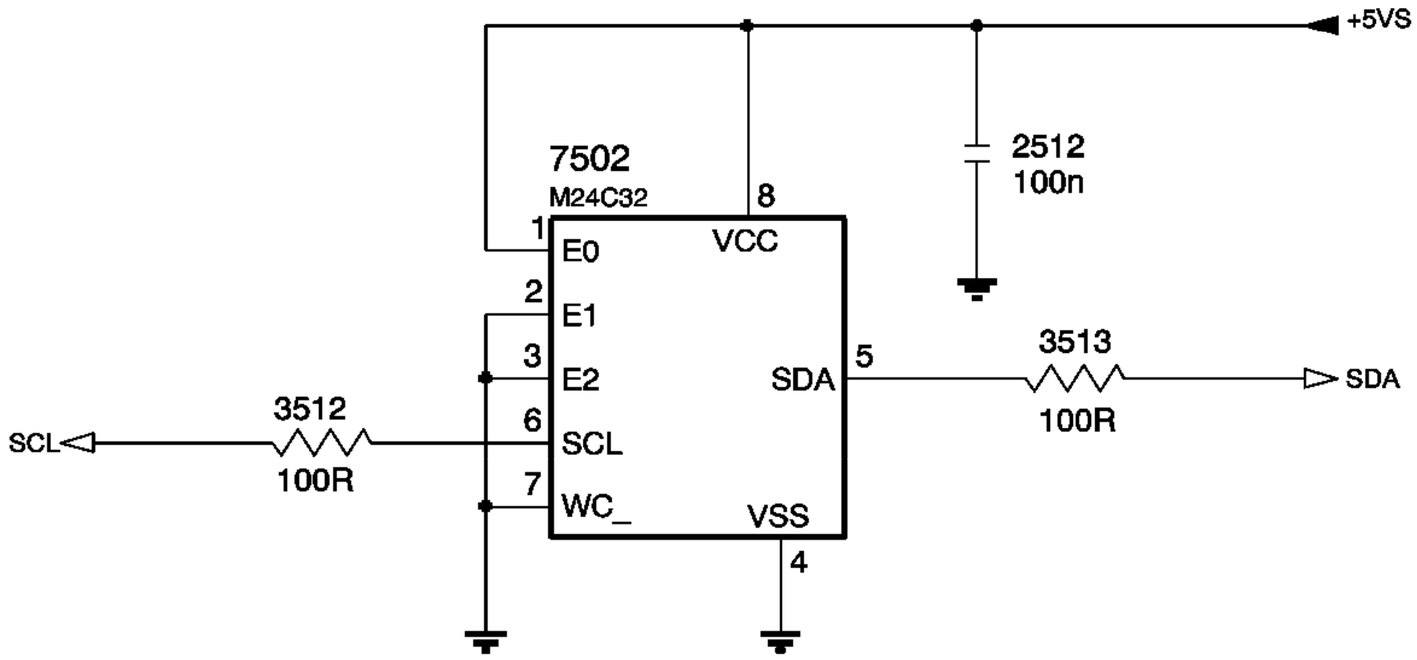

CB1 3D COMB FILTER PANEL

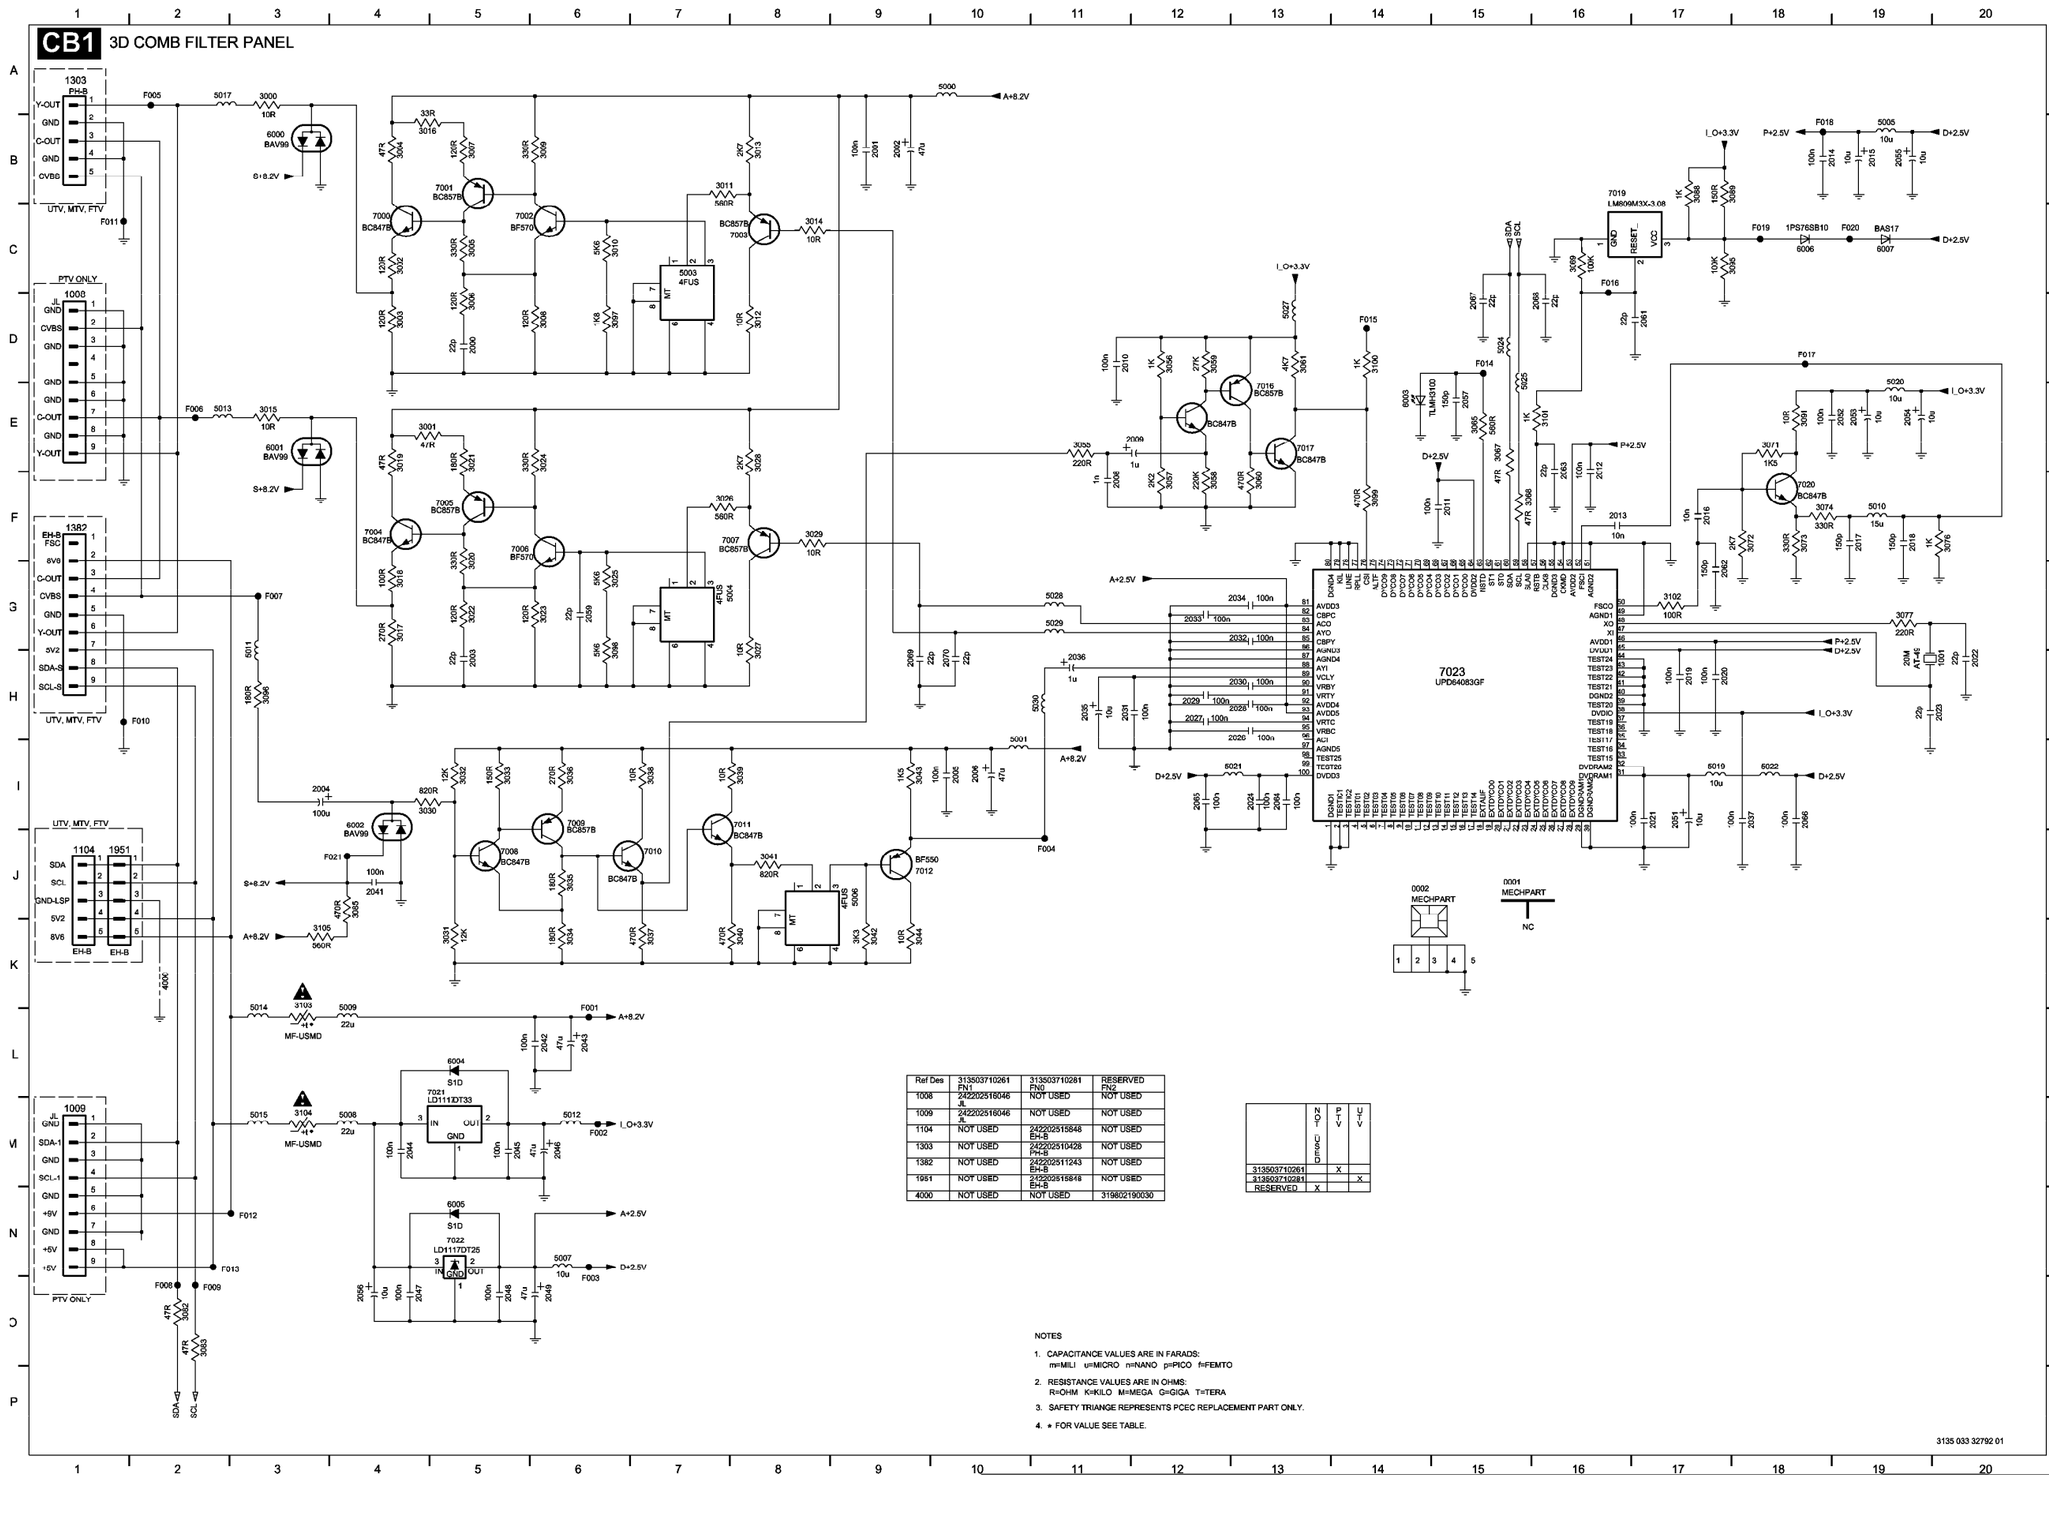

Ref Des	313503710261 FN1	313503710281 FN0	RESERVED FN2
1008	2422025516046 JL	NOT USED	NOT USED
1009	2422025516046 JL	NOT USED	NOT USED
1104	NOT USED	2422025515848 EH-B	NOT USED
1303	NOT USED	2422025510428 FH-B	NOT USED
1382	NOT USED	2422025511243 EH-B	NOT USED
1951	NOT USED	2422025515848 EH-B	NOT USED
4000	NOT USED	NOT USED	319802190030

	NOT DEFINED	PTV	UTV
313503710261		X	
313503710281			X
RESERVED	X		

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.

3135 033 32792 01

0001 K15	3034 K6	F006 E2
0002 K14	3035 J6	F007 G3
1001 H19	3036 I6	F008 O2
1008 E1	3037 K7	F009 O2
1009 N1	3038 I/	F010 H1
1104 J1	3039 I7	F011 C1
1303 B1	3040 K7	F012 N3
1382 G1	3041 J8	F013 N2
1951 J1	3042 K9	F014 D15
2000 D5	3043 I9	F015 D14
2001 B9	3044 K9	F016 D16
2002 B9	3055 E11	F017 D18
2003 H5	3056 D12	F018 B18
2004 I3	3057 F12	F019 C18
2005 I10	3058 F12	F020 C19
2006 I10	3059 D12	F021 J4
2008 F11	3060 F13	
2009 E11	3061 D13	
2010 D11	3065 E15	
2011 F14	3067 E15	
2012 F16	3068 F15	
2013 F16	3069 C16	
2014 B18	3071 E18	
2015 B19	3072 F17	
2016 F17	3073 F18	
2017 F19	3074 F18	
2018 F19	3076 F19	
2019 H17	3077 G19	
2020 H17	3082 O2	
2021 I17	3083 O2	
2022 H20	3085 J4	
2023 H19	3088 B17	
2024 I13	3089 B17	
2026 H13	3091 E18	
2027 H12	3095 C17	
2028 H13	3096 H3	
2029 H12	3097 D6	
2030 H13	3098 H6	
2031 H11	3099 F14	
2032 G13	3100 D14	
2033 G12	3101 E15	
2034 G13	3102 G17	
2035 H11	3103 L3	
2036 H11	3104 M3	
2037 I17	3105 K3	
2041 J4	4000 K2	
2042 L6	5000 A10	
2043 L6	5001 I10	
2044 M4	5003 D7	
2045 M5	5004 G7	
2046 M6	5005 B19	
2047 O4	5006 K8	
2048 O5	5007 N6	
2049 O6	5008 M4	
2051 I17	5009 L4	
2052 E18	5010 F19	
2053 E19	5011 H3	
2054 E19	5012 M6	
2055 B19	5013 E2	
2056 O4	5014 L3	
2057 E15	5015 M3	
2059 G6	5017 A2	
2061 D16	5019 I17	
2062 G17	5020 E19	
2063 F16	5021 I12	
2064 I13	5022 I18	
2065 I12	5024 D15	
2066 I18	5025 E15	
2067 D15	5027 D13	
2068 D16	5028 G11	
2069 H9	5029 G11	
2070 H10	5030 H11	
3000 A3	6000 B3	
3001 E4	6001 E3	
3002 C4	6002 J4	
3003 D4	6003 E14	
3004 B4	6004 L5	
3005 C5	6005 N5	
3006 D5	6006 C18	
3007 B5	6007 C19	
3008 D6	7000 C4	
3009 B6	7001 B5	
3010 C6	7002 C6	
3011 B7	7003 C8	
3012 D8	7004 F4	
3013 B8	7005 F5	
3014 C8	7006 F6	
3015 E3	7007 F8	
3016 B4	7008 J5	
3017 G4	7009 J6	
3018 G4	7010 J6	
3019 E4	7011 J7	
3020 G5	7012 J9	
3021 E5	7015 E12	
3022 G5	7016 E12	
3023 G6	7017 E13	
3024 E6	7019 C16	
3025 G6	7020 F18	
3026 F7	7021 M5	
3027 H8	7022 N5	
3028 E8	7023 H15	
3029 F8	F001 L6	
3030 I4	F002 M6	
3031 K5	F003 N6	
3032 I5	F004 J11	
3033 I5	F005 A2	

V 1 REAR JACK PANEL (1 OF 2)

TO SYSTEM BOARD

K 1

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

3135 033 32975

V2 REAR JACK PANEL (2 OF 2)

AV1-L
AV1-R
AV1-CVBS
AV1-Y
AV1-C
AV2-L
AV2-R
AV2-CVBS
AV2-Y
AV2-C
R-Y1-IN
L-Y1-IN
R-Y2-IN
L-Y2-IN
AUDIO-SW
CVBS-SC2_MON-OUT
L-CL_VL-OUT
R-CL_VL-OUT
SOUND_ENABLE
Pr
Pb
Y
+9V
+Vp
8V9
1251-11 YKC21-2938
1251-10 YKC21-2938
1251-12 YKC21-2938
1251-9 YKC21-2938
1251-8 YKC21-2938
1251-7 YKC21-2938
1251-5 YKC21-2938
1251-4 YKC21-2938
1251-6 YKC21-2938
1251-2 YKC21-2938
1251-1 YKC21-2938
1251-3 YKC21-2938
1214-2 YKC21-3620 WHITE_RED_LEFT
1214-1 YKC21-3620 WHITE_RED_RIGHT
1218 YKF51-5347
1219 YKF51-5347
1217 YKC21-3394
1208 B5B-EH-A
1207 B5B-EH-A
7110 BC847B
7109 BC847B
7112 BC847B
7111 BC847B
BZX384-C6V8
6125 BAV99
6124 BAV99
6123 BAV99
6122 BAV99
6121 BAV99
6129 BAV99
6132 BAV99
6130 BAV99
6128 BAV99

3135 033 32975

O 1 SIDE JACK PANEL

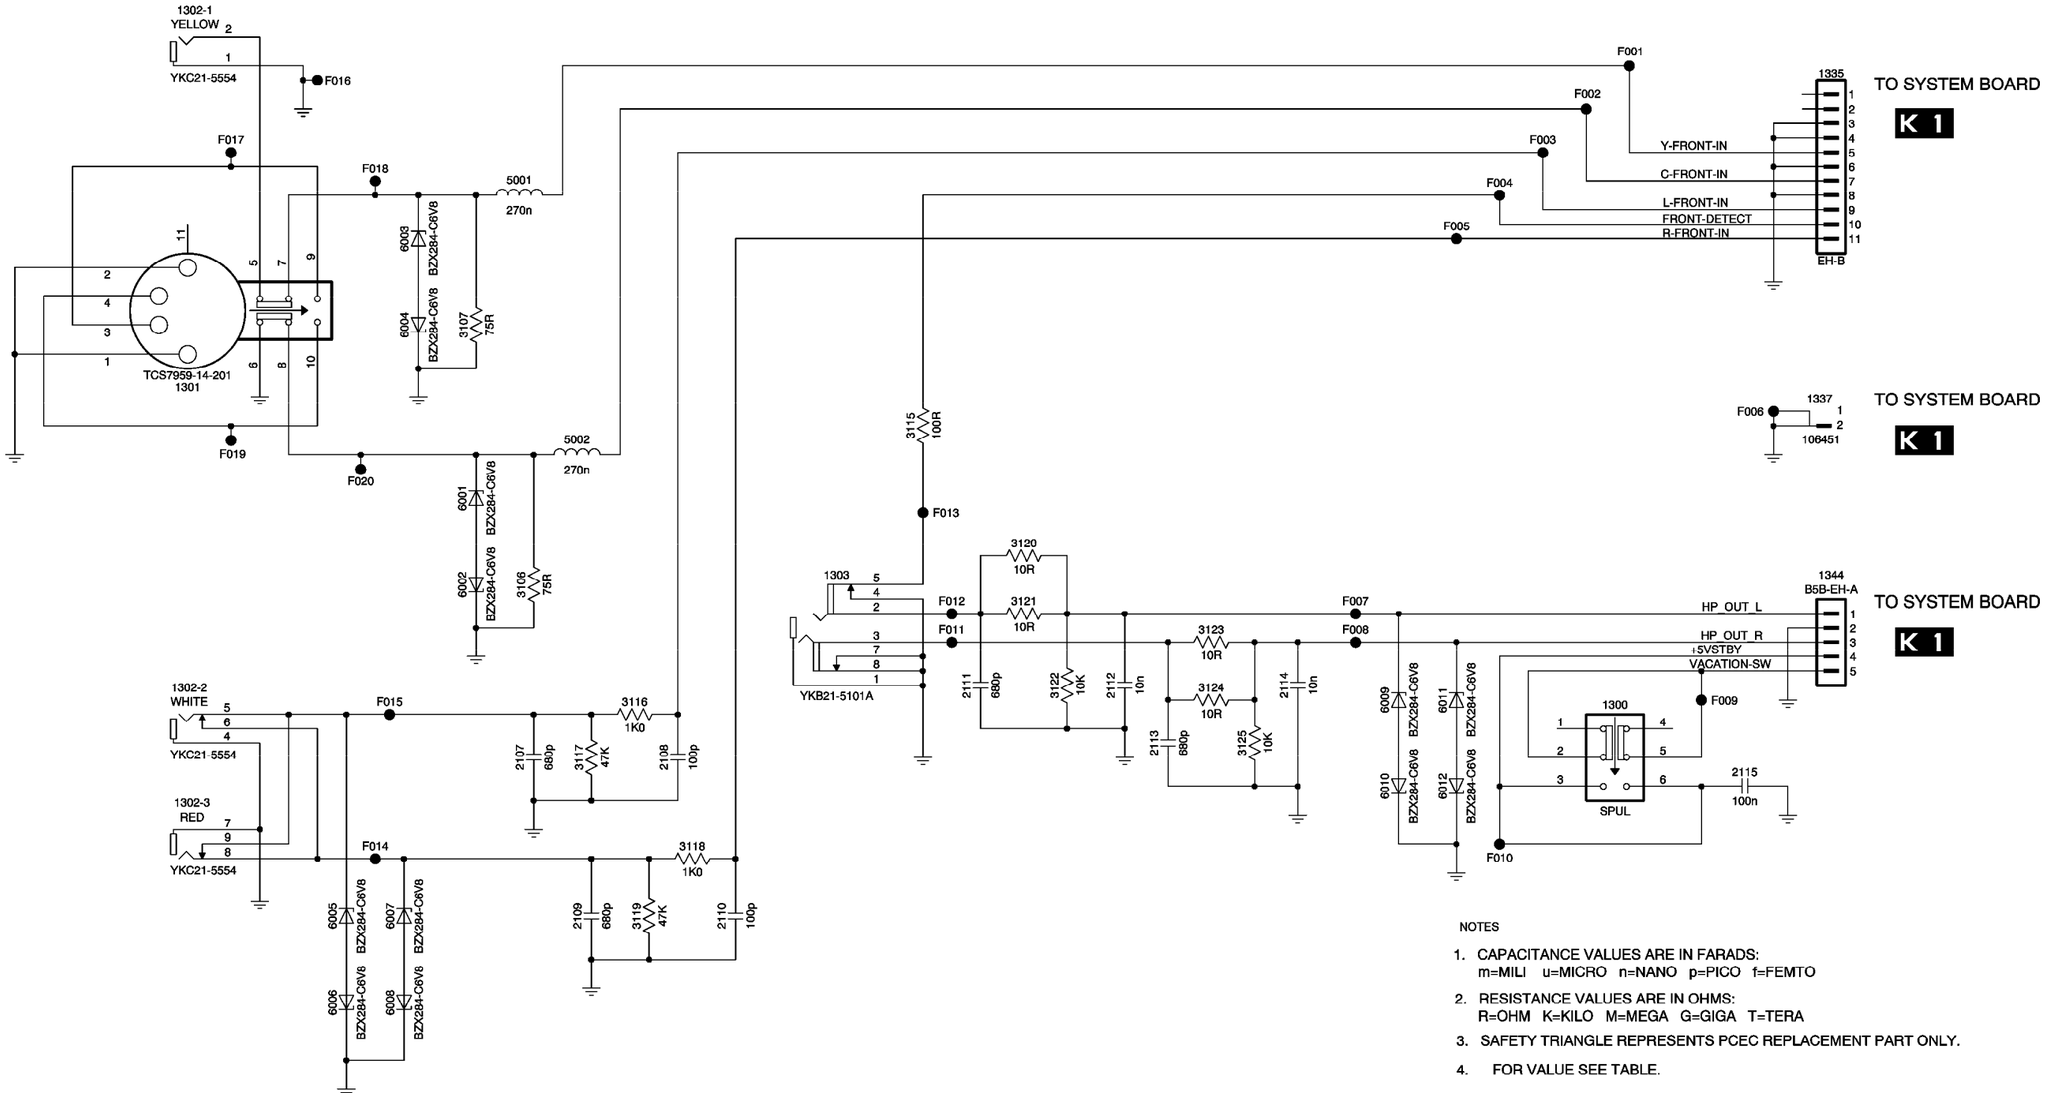

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. FOR VALUE SEE TABLE.

LS LED SENSOR

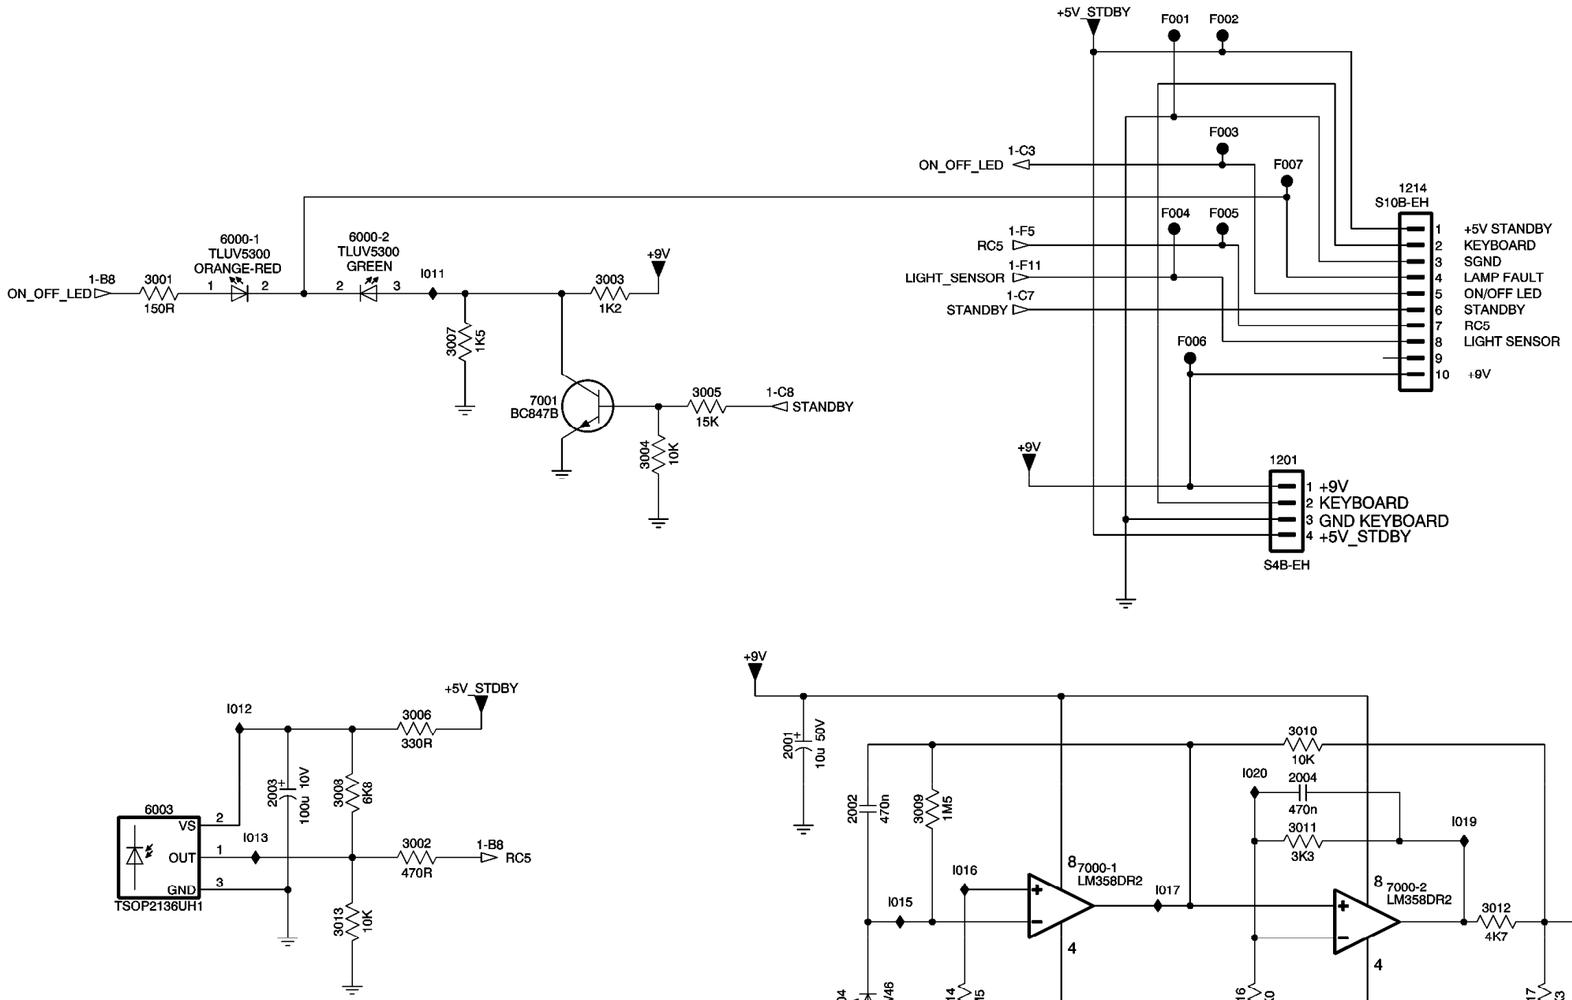

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

P 1 LED / KEYBOARD PANEL

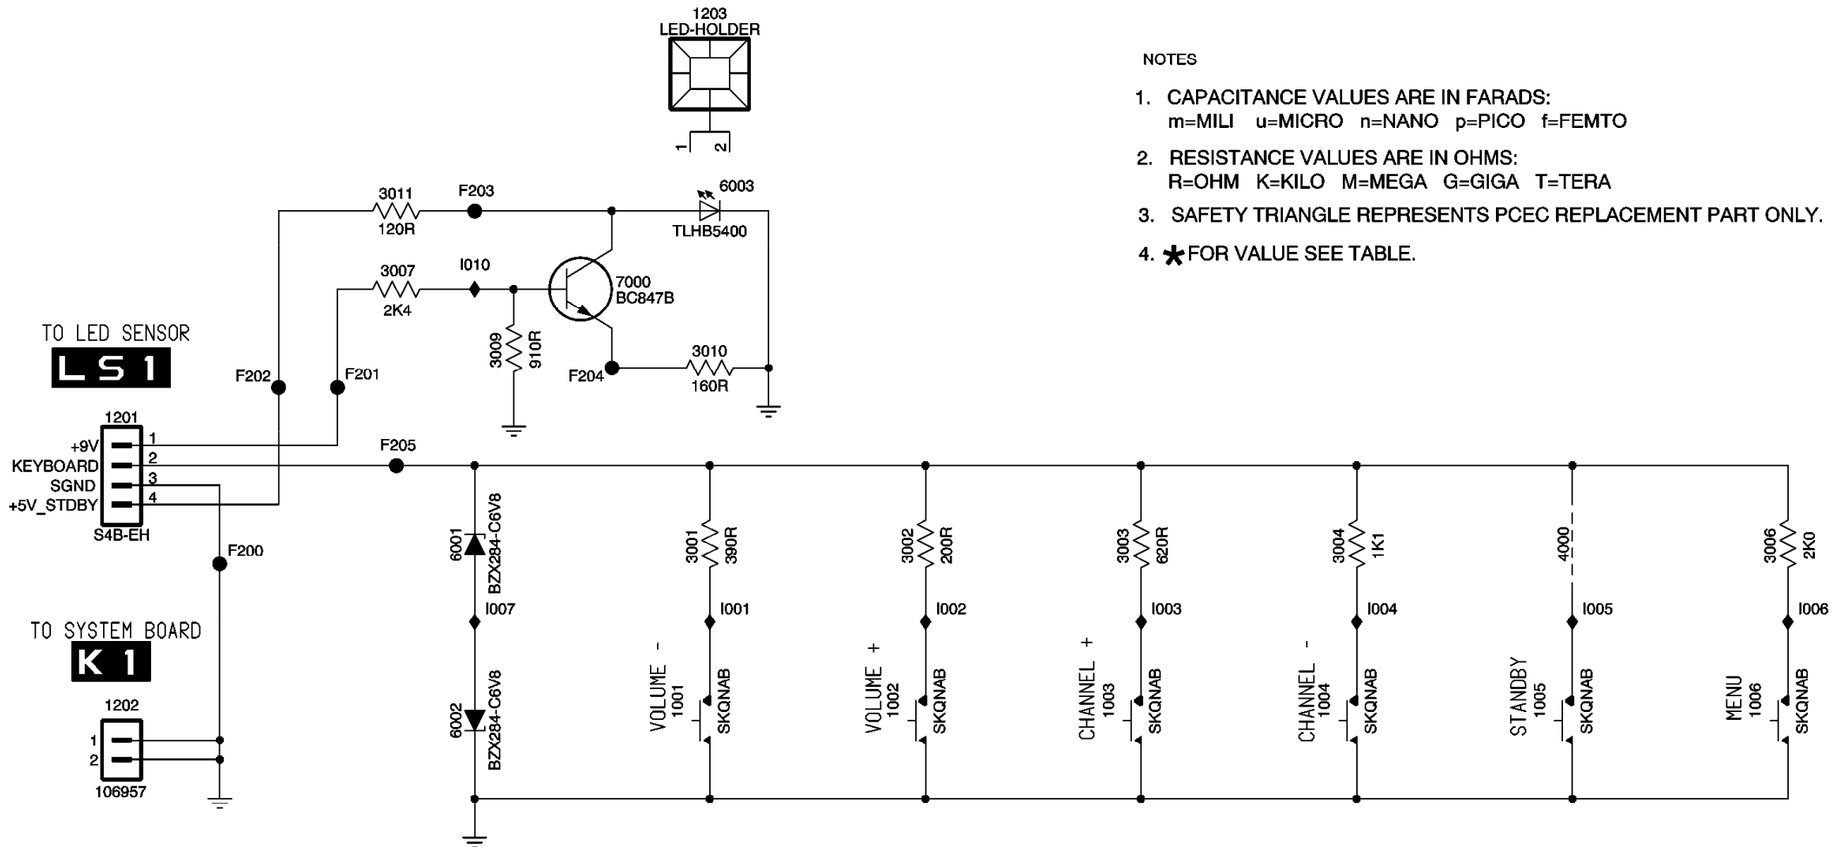

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * FOR VALUE SEE TABLE.

3135 033 33132 01

TS1 LCOS THERMAL SENSOR

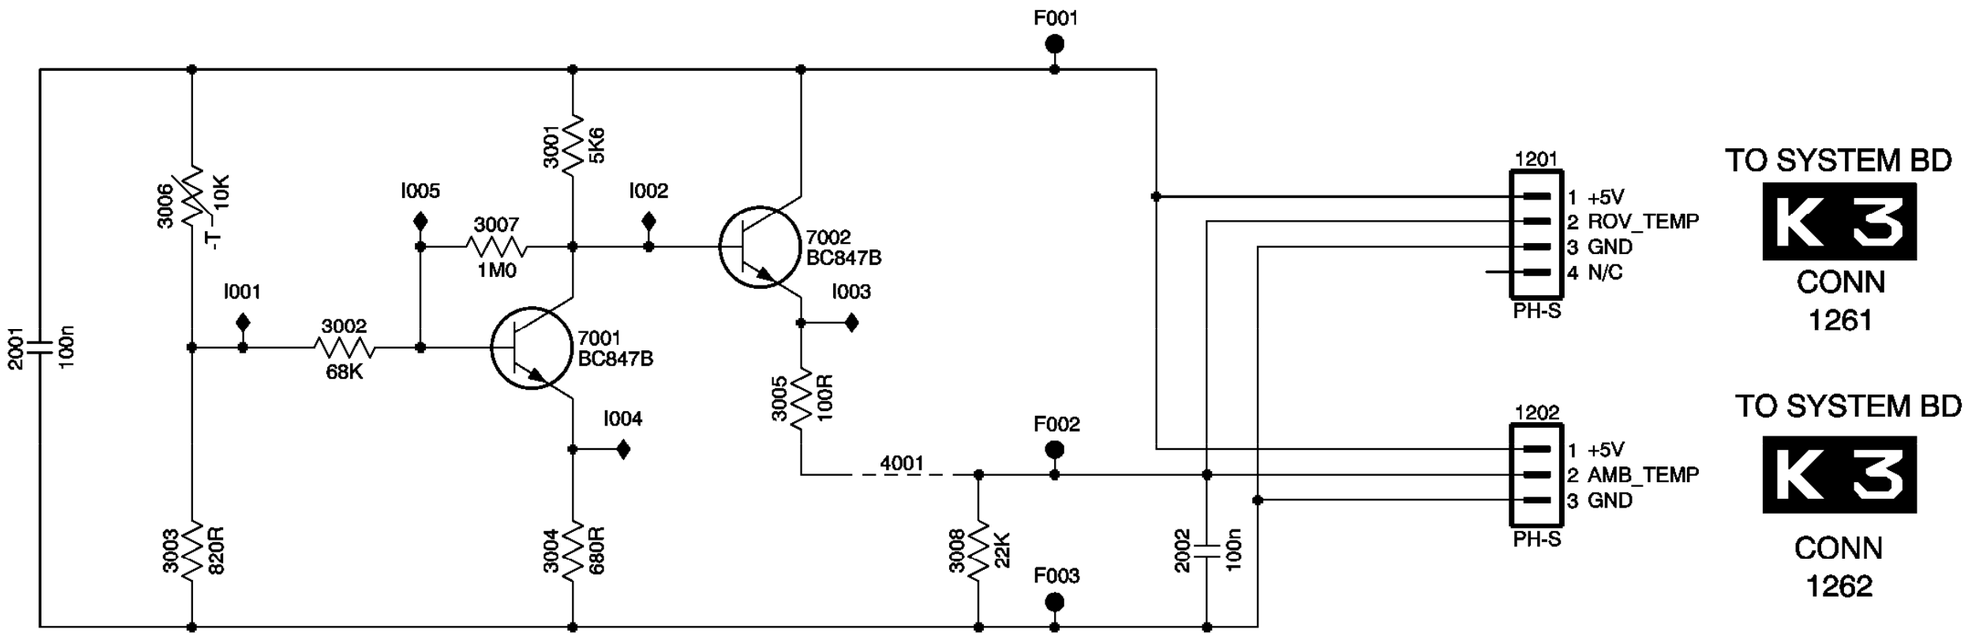

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱ FOR VALUE SEE TABLE.

3135 033 33172 01

AA1 AUDIO AMPLIFIER BOARD

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
   m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
   R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ✱FOR VALUE SEE TABLE.

TO SYSTEM BOARD K1 (1700)
SOUND_ENABLE
AUDIO_R
AUDIO_L

TO SYSTEM BOARD K1 (1216)

TO SYSTEM BOARD K1 (1305)
1 +5V
2 GND
3 PWR_FAIL
4 PWRFAIL_STDBY
5 AUDIO_FAULT
6 GND
7 DC_FAULT

FOR NAFTA TO CENTER CHANNEL RS1 (1349)
OR
FOR EUROPE CONNECT TO THE SPEAKERS
RIGHT+
RIGHT-
LEFT-
LEFT+

TO INPUT POWER BOARD W1 (1316)
+V_AUDIO
-V_AUDIO

	EUROPE	NAFTA	not used
3135_037_11412_01	X	X	
RESERVED			X

Ref Des	3135_037_11412_01	RESERVED
9710	NOT USED	319803690010
9711	NOT USED	319803690010

3135 033 33532 01

CH CENTER CH. SW. PANEL

1000 A4
1002-B B2
1321 B4
1349 B1
I001 B1
I002 B1
I003 B2
I004 B2
I005 B3
I006 A4
I007 A4
I008 B4
I009 C4
I010 C4
I011 C4

1000
YKD21-180
OUT

I006
I007

To Audio Panel
AA1 1321

1349
42892

I001
I002

1002-B
GF-642

I003
I004
I005

To
Speakers

1321
42892

I008
I009
I010
I011

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

CIRCUIT BOARD ASSEMBLIES

[W] Input Power Panel
[U1] Main Power Panel
[K] System Board
[B] SSB Panel
[SL] Scaler Panel
[F] DW PIP Panel
[CB1] 3D Comb Filter Panel
[V] Rear Jack Panel
[O1] Side Jack Panel
[LS] LED/Sensor Panel
[P1] LED/Keyboard Panel
[TS1] Thermal Sensor Panel
[AA1] Audio Amplifier Panel
[CH] Center Channel Switch Panel

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

[W] INPUT POWER PANEL (Top View)

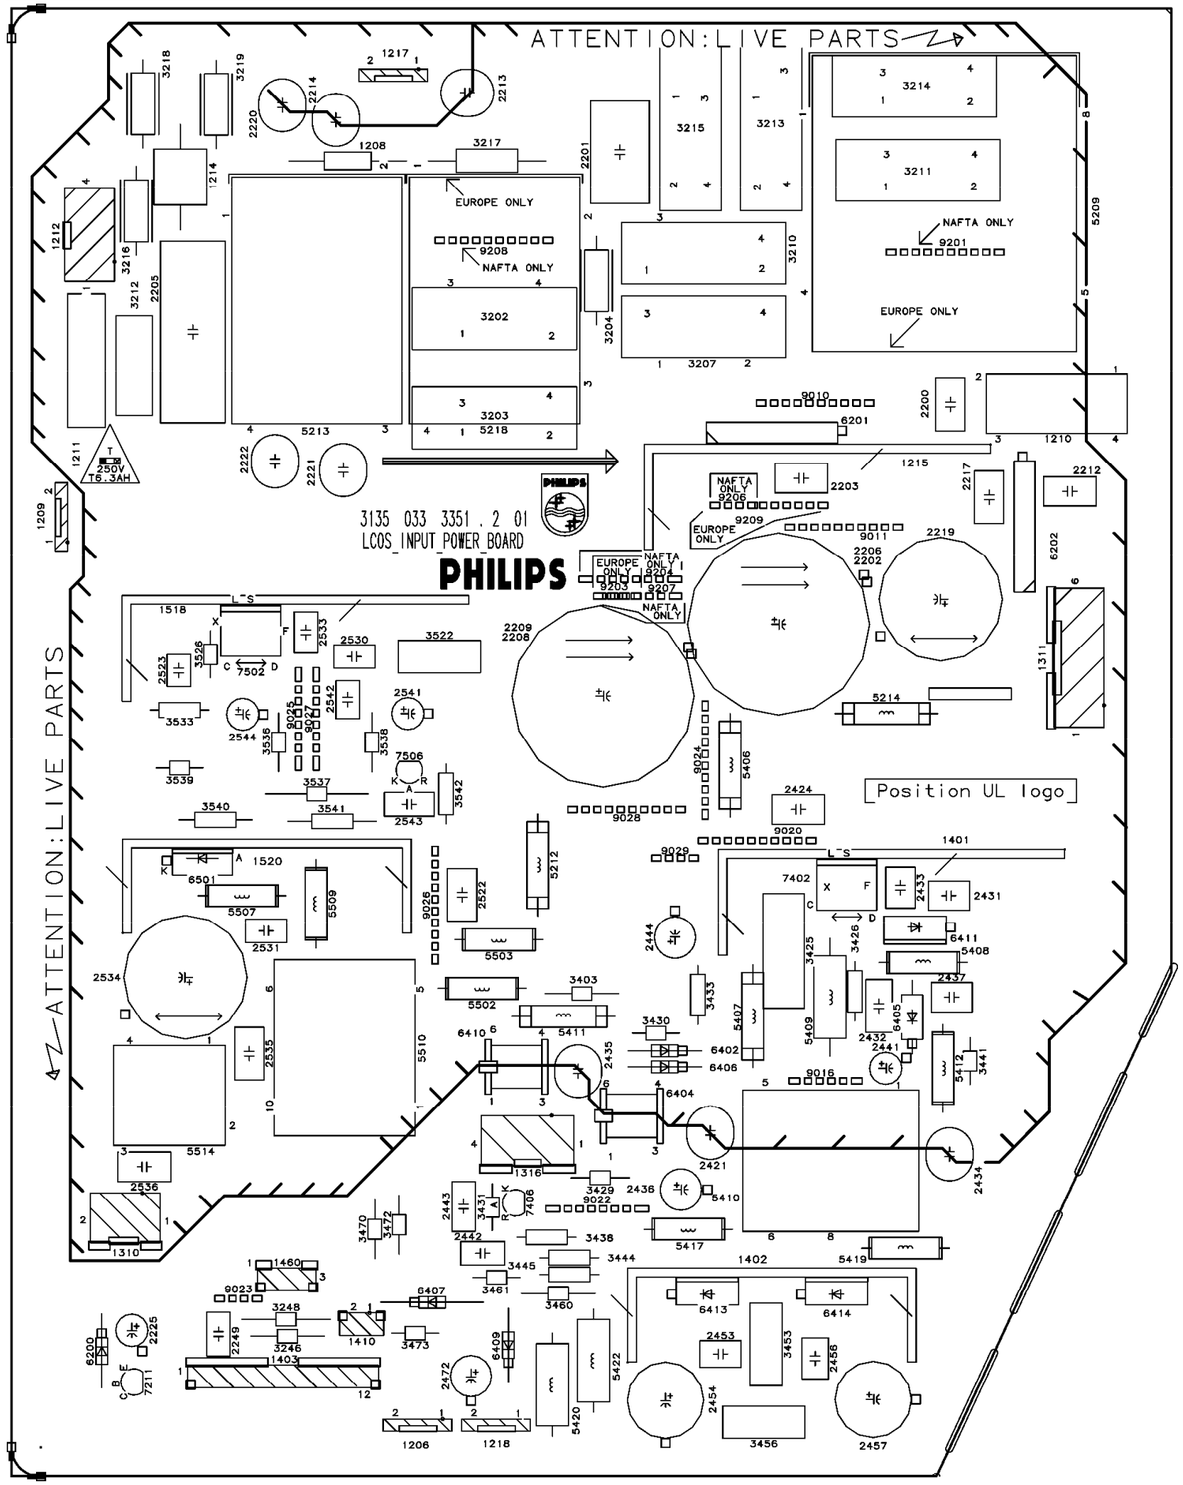

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[W] INPUT POWER PANEL (Bottom View)

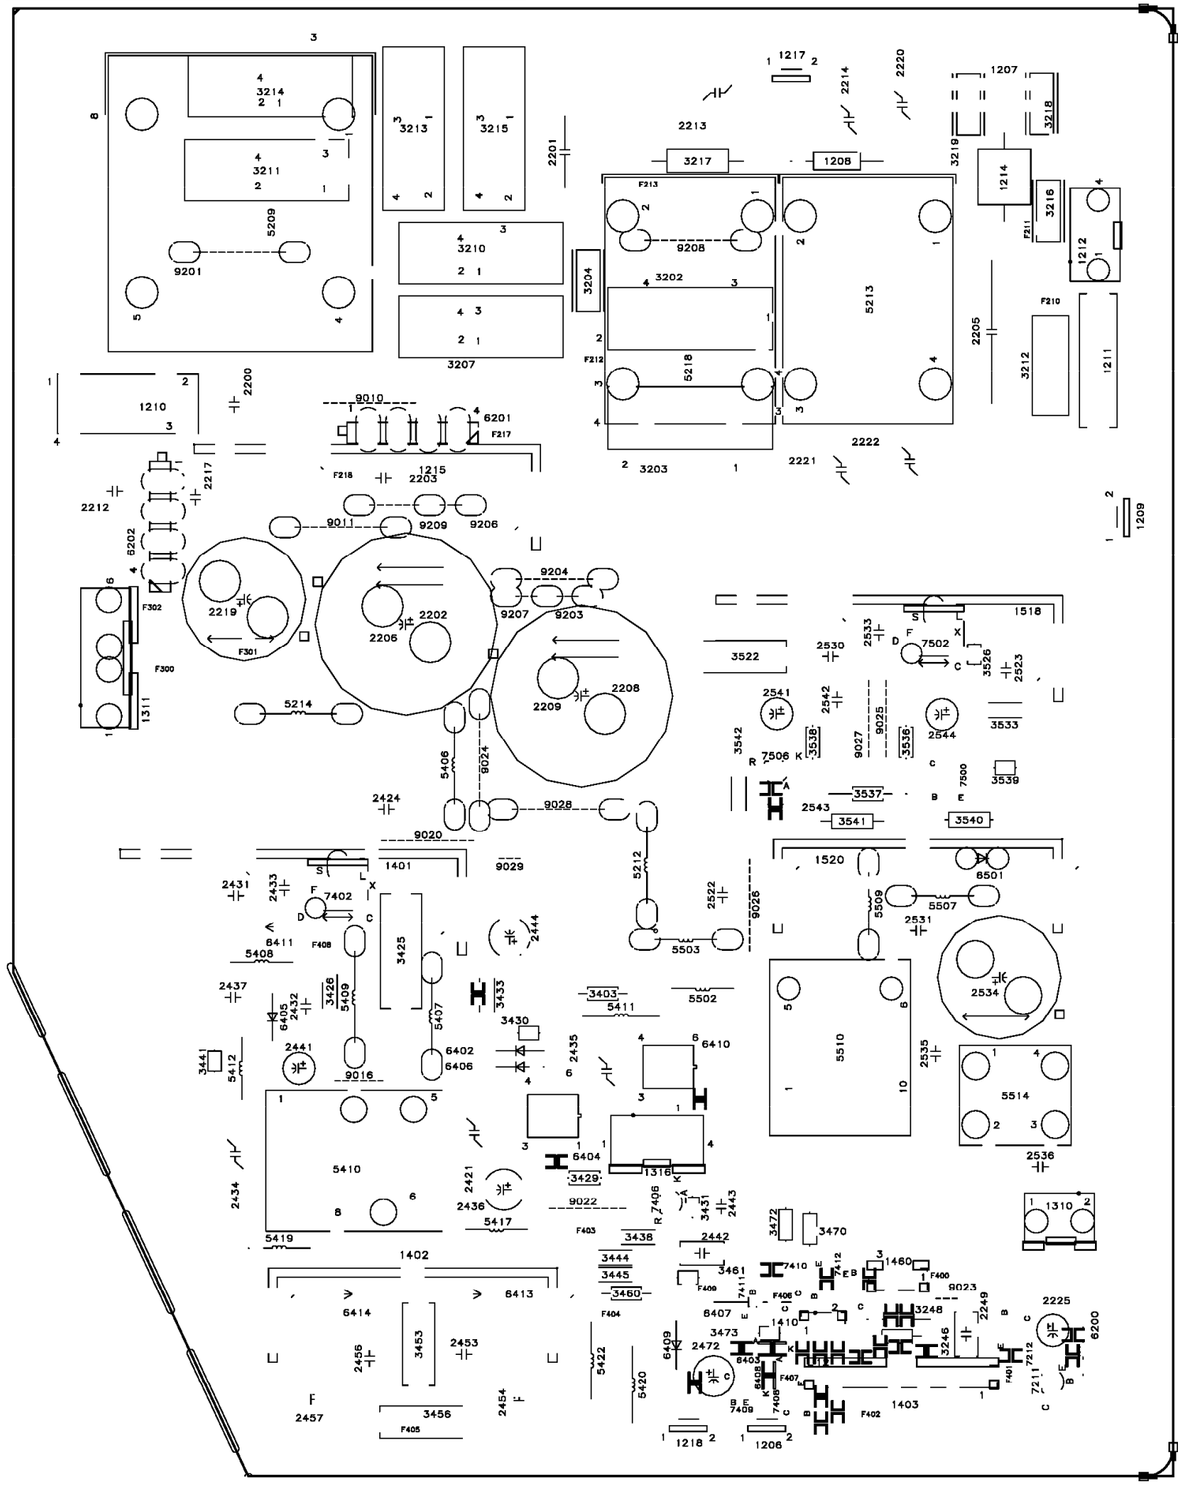

Return to Circuit Board TOC.

[U1] MAIN POWER PANEL (Top View)

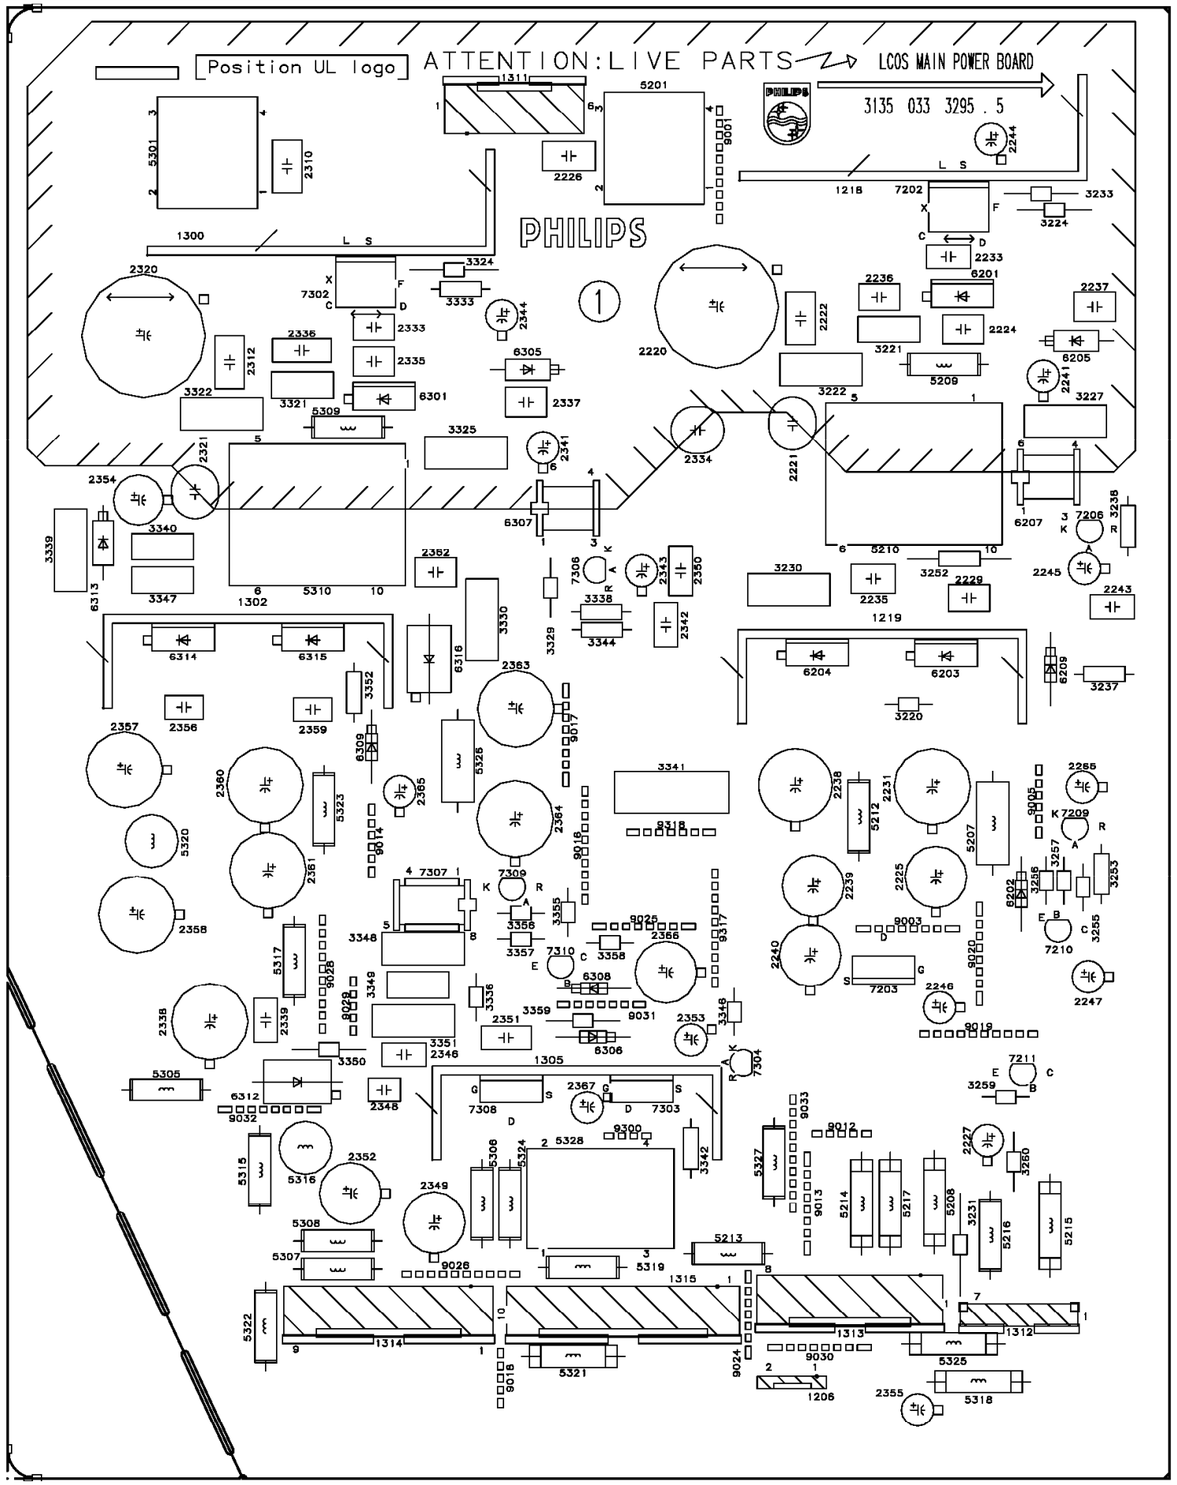

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[U1] MAIN POWER PANEL (Bottom View)

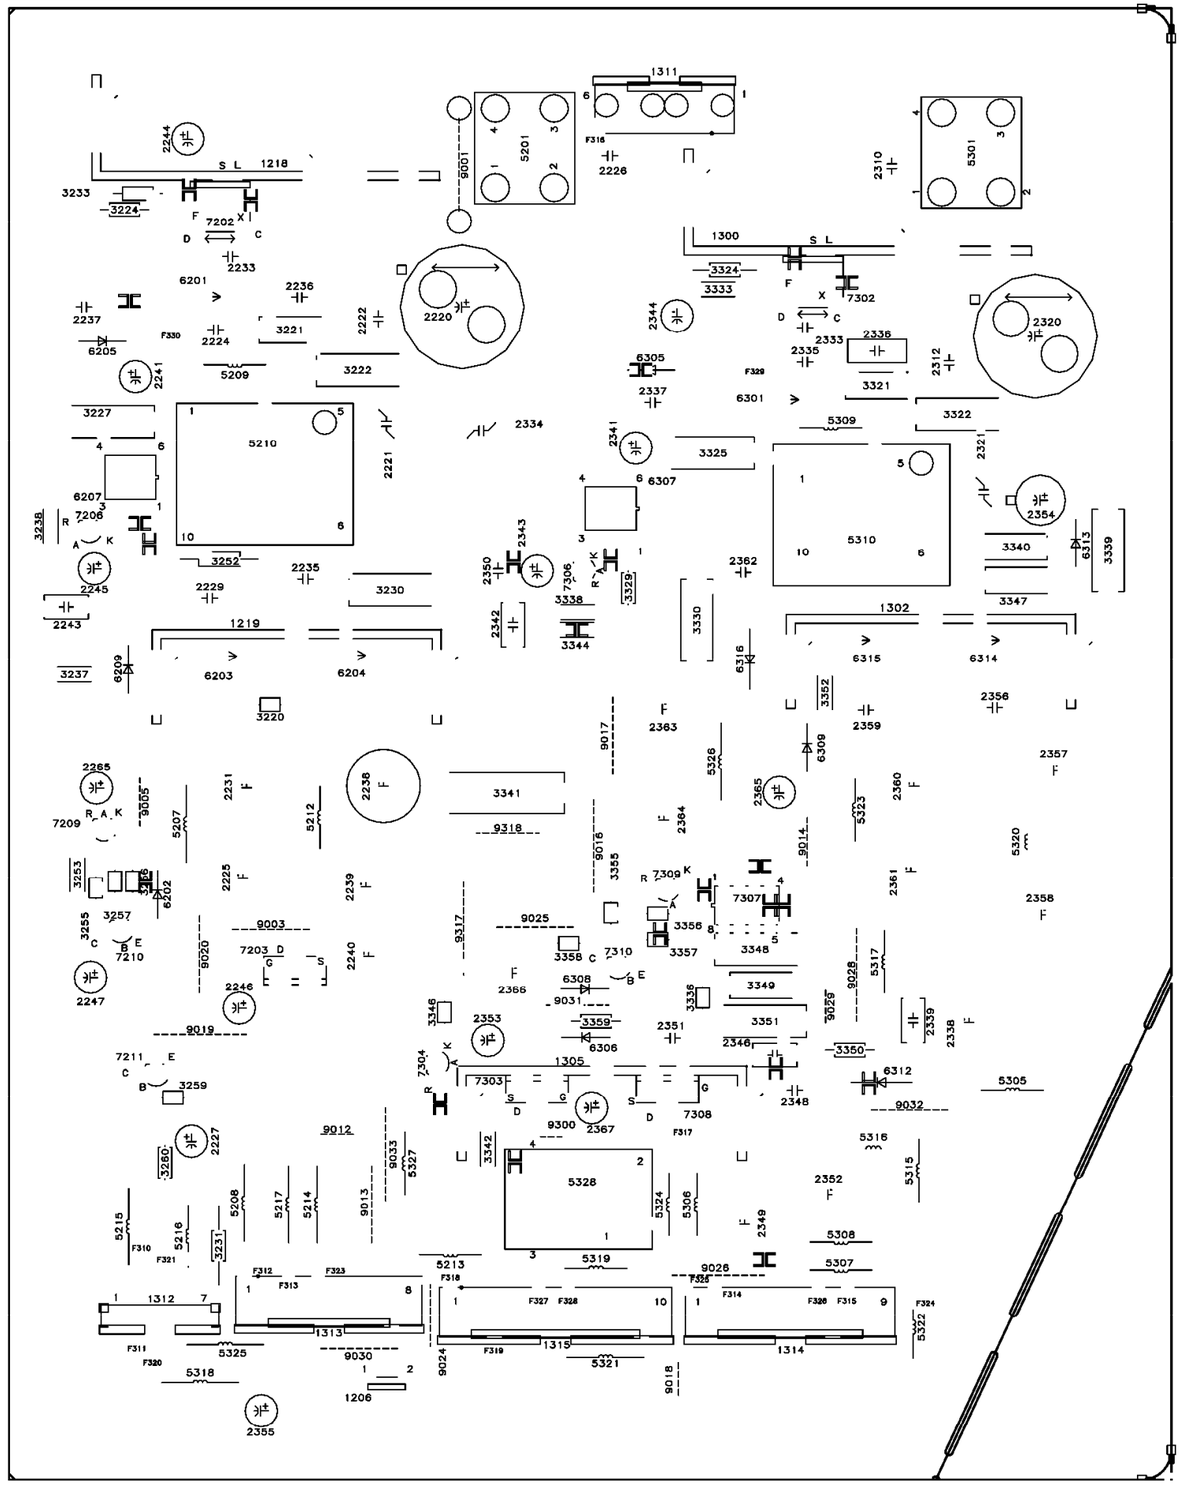

Return to Circuit Board TOC.

[K] SYSTEM BOARD (Top View)

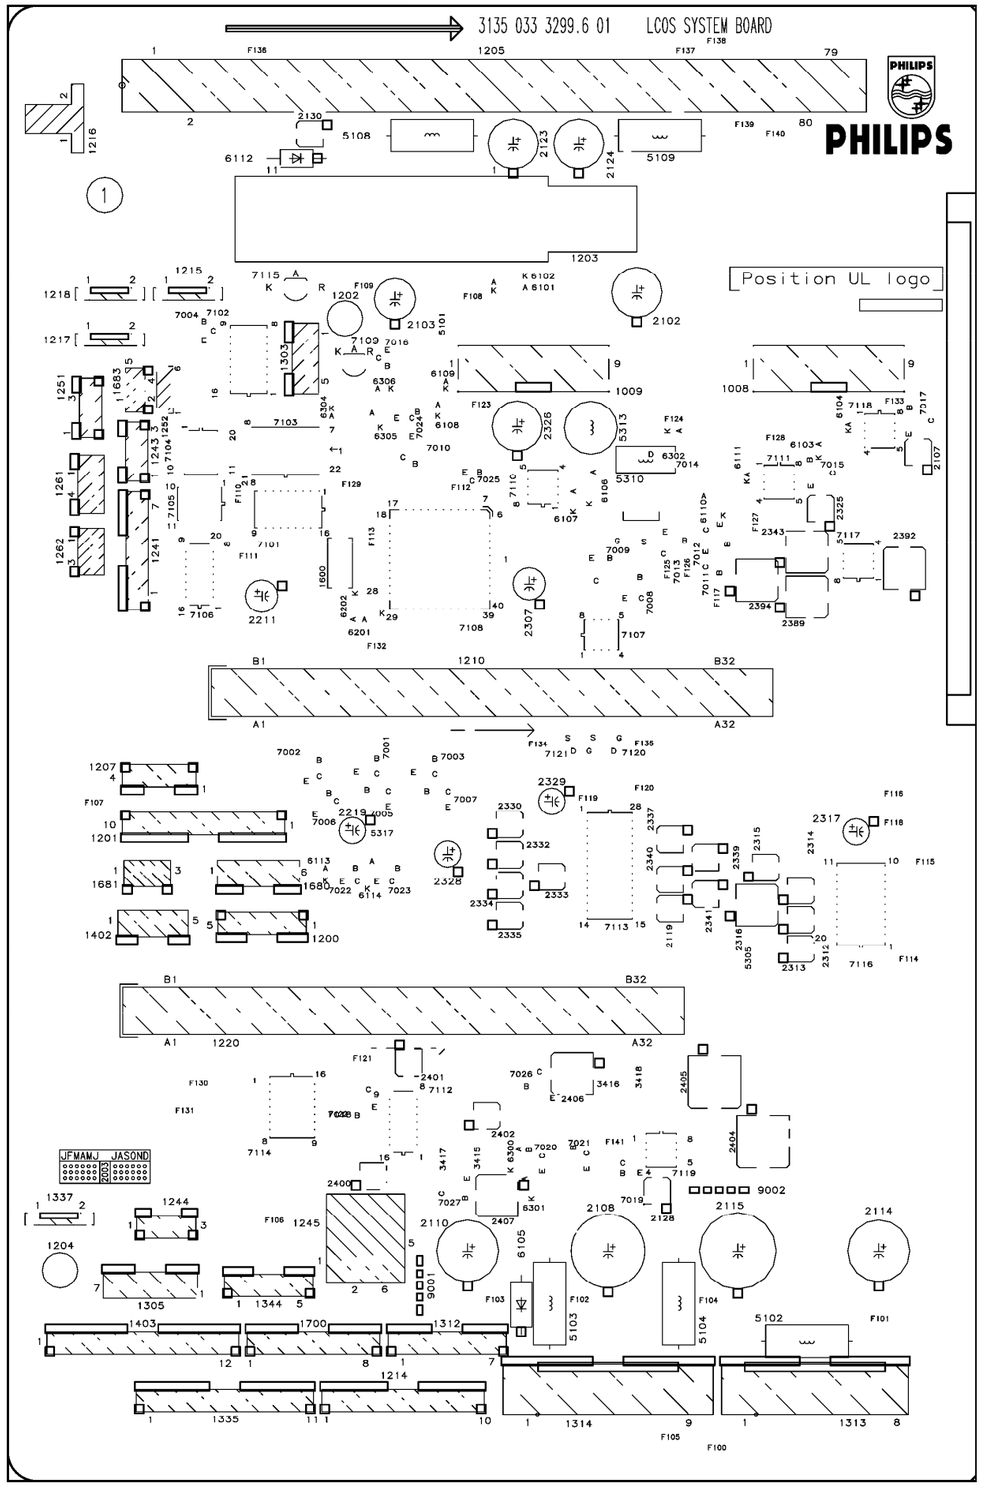

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[K] SYSTEM BOARD (Bottom View)

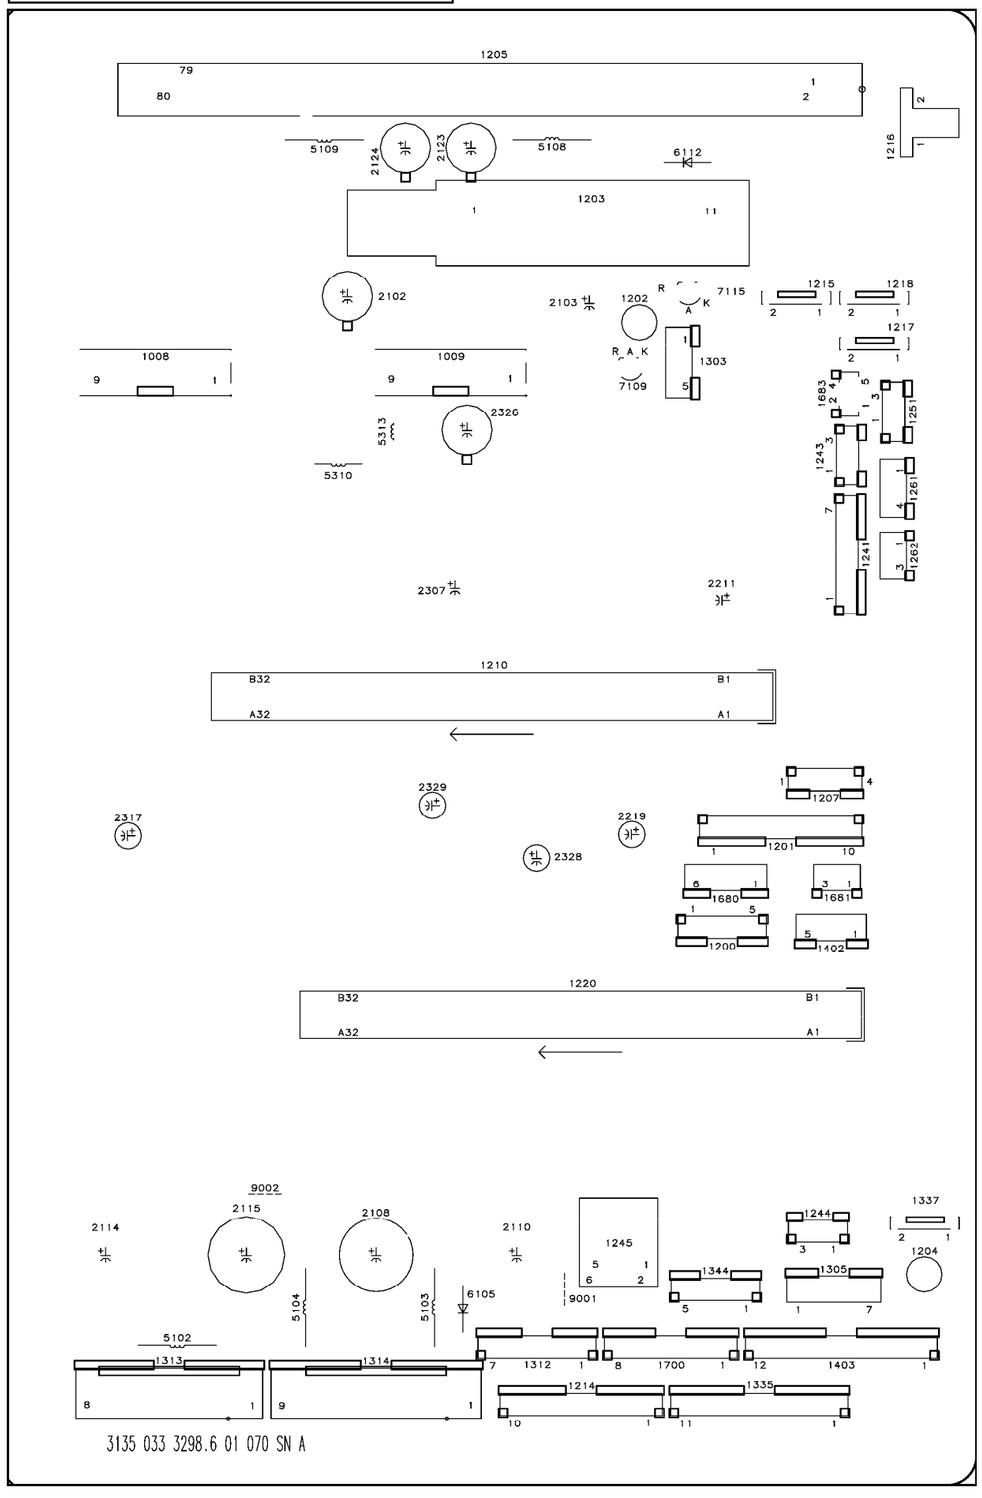

Return to Circuit Board TOC.

[B] SSB PANEL (Top View)

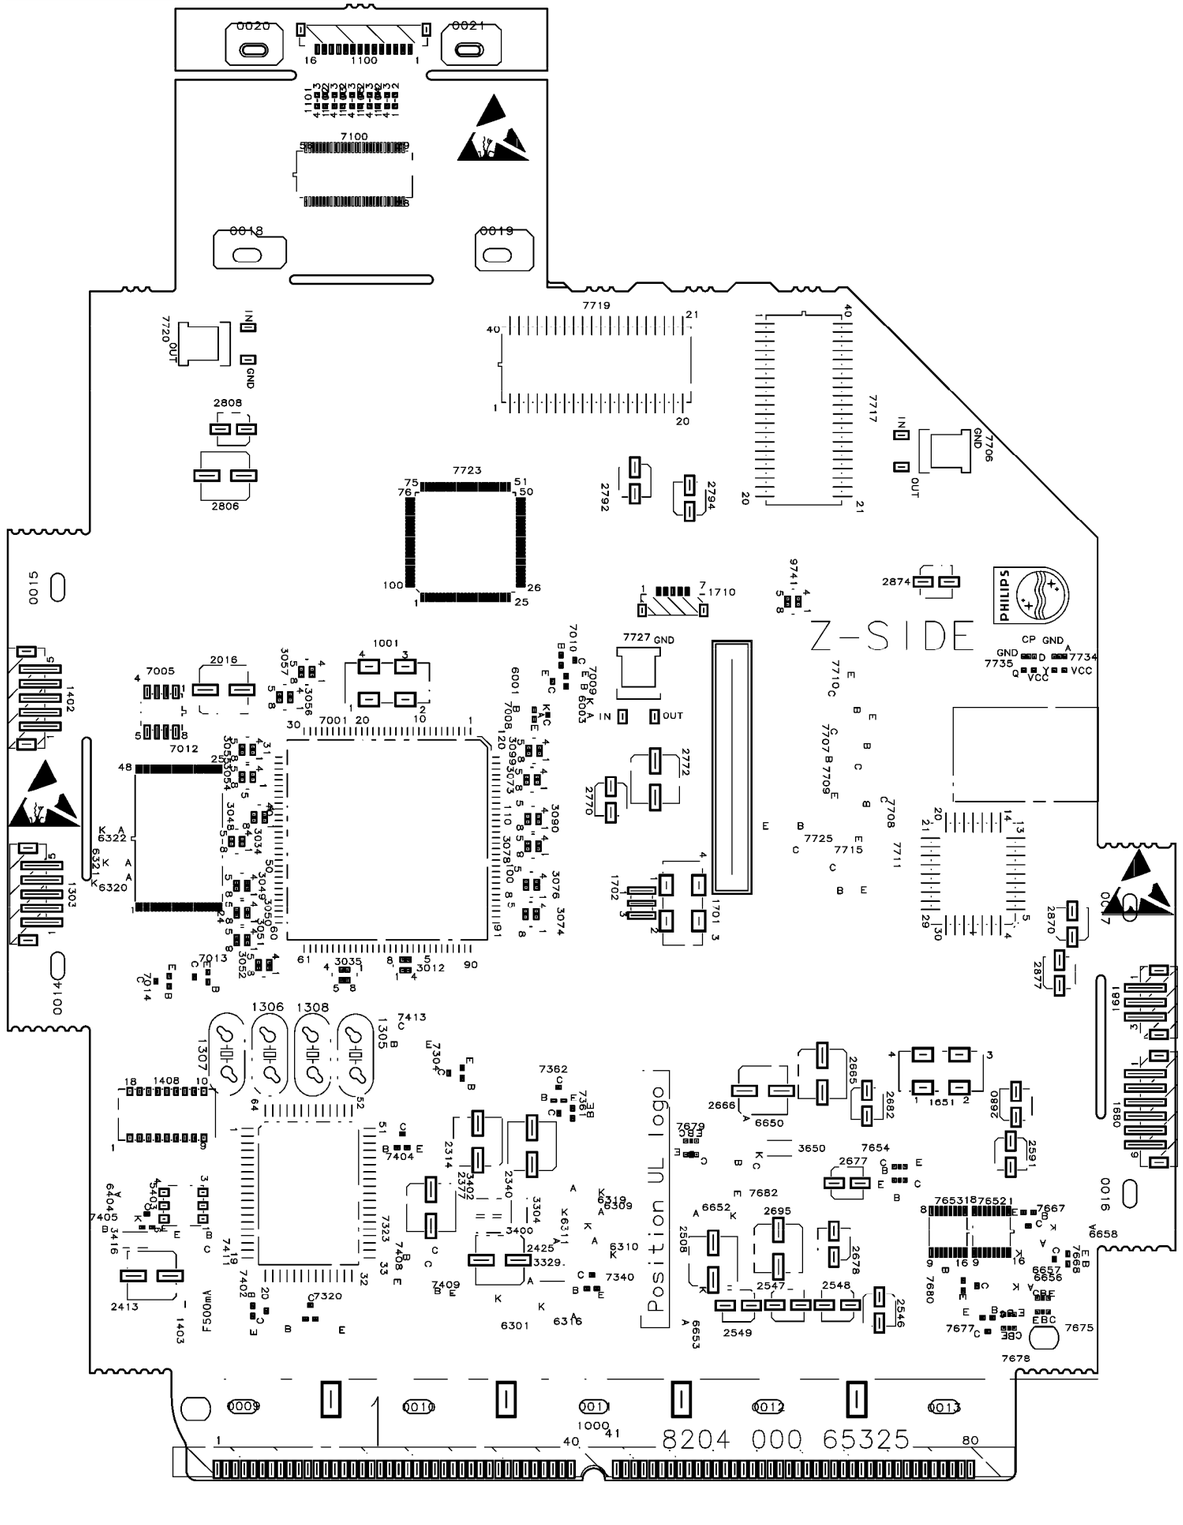

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[B] SSB PANEL (Bottom View)

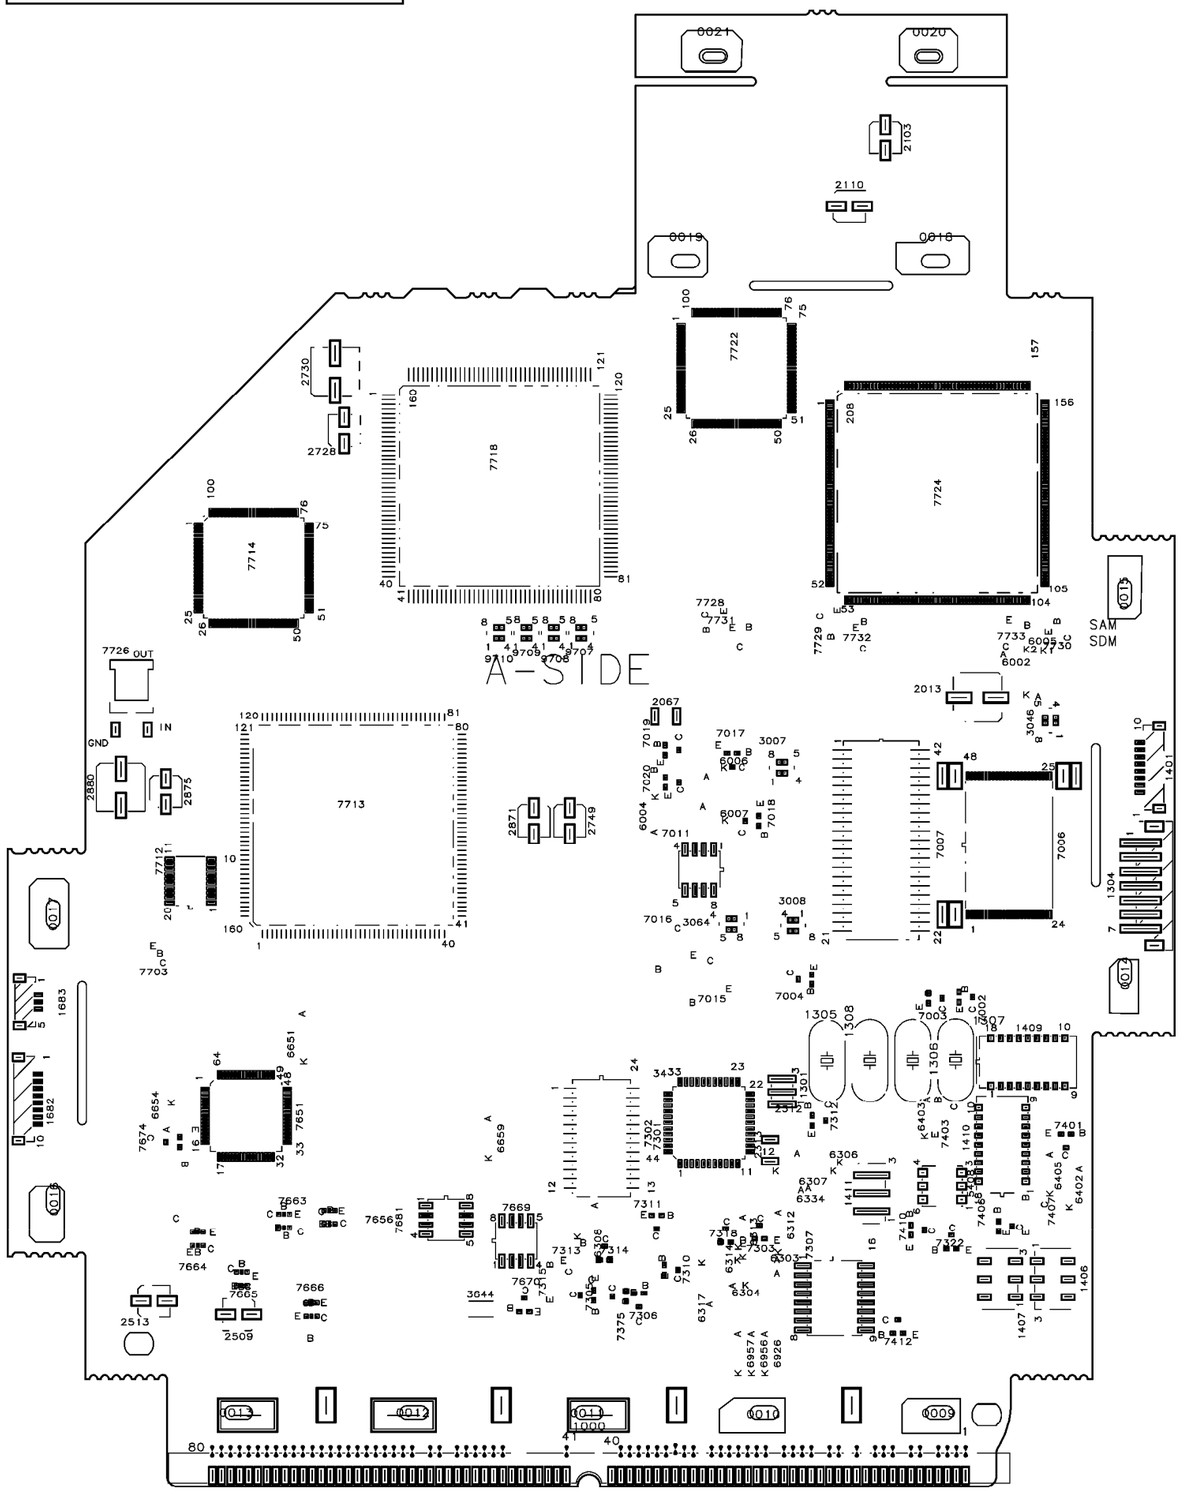

Return to Circuit Board TOC.

[SL] SCALER PANEL (Top View)

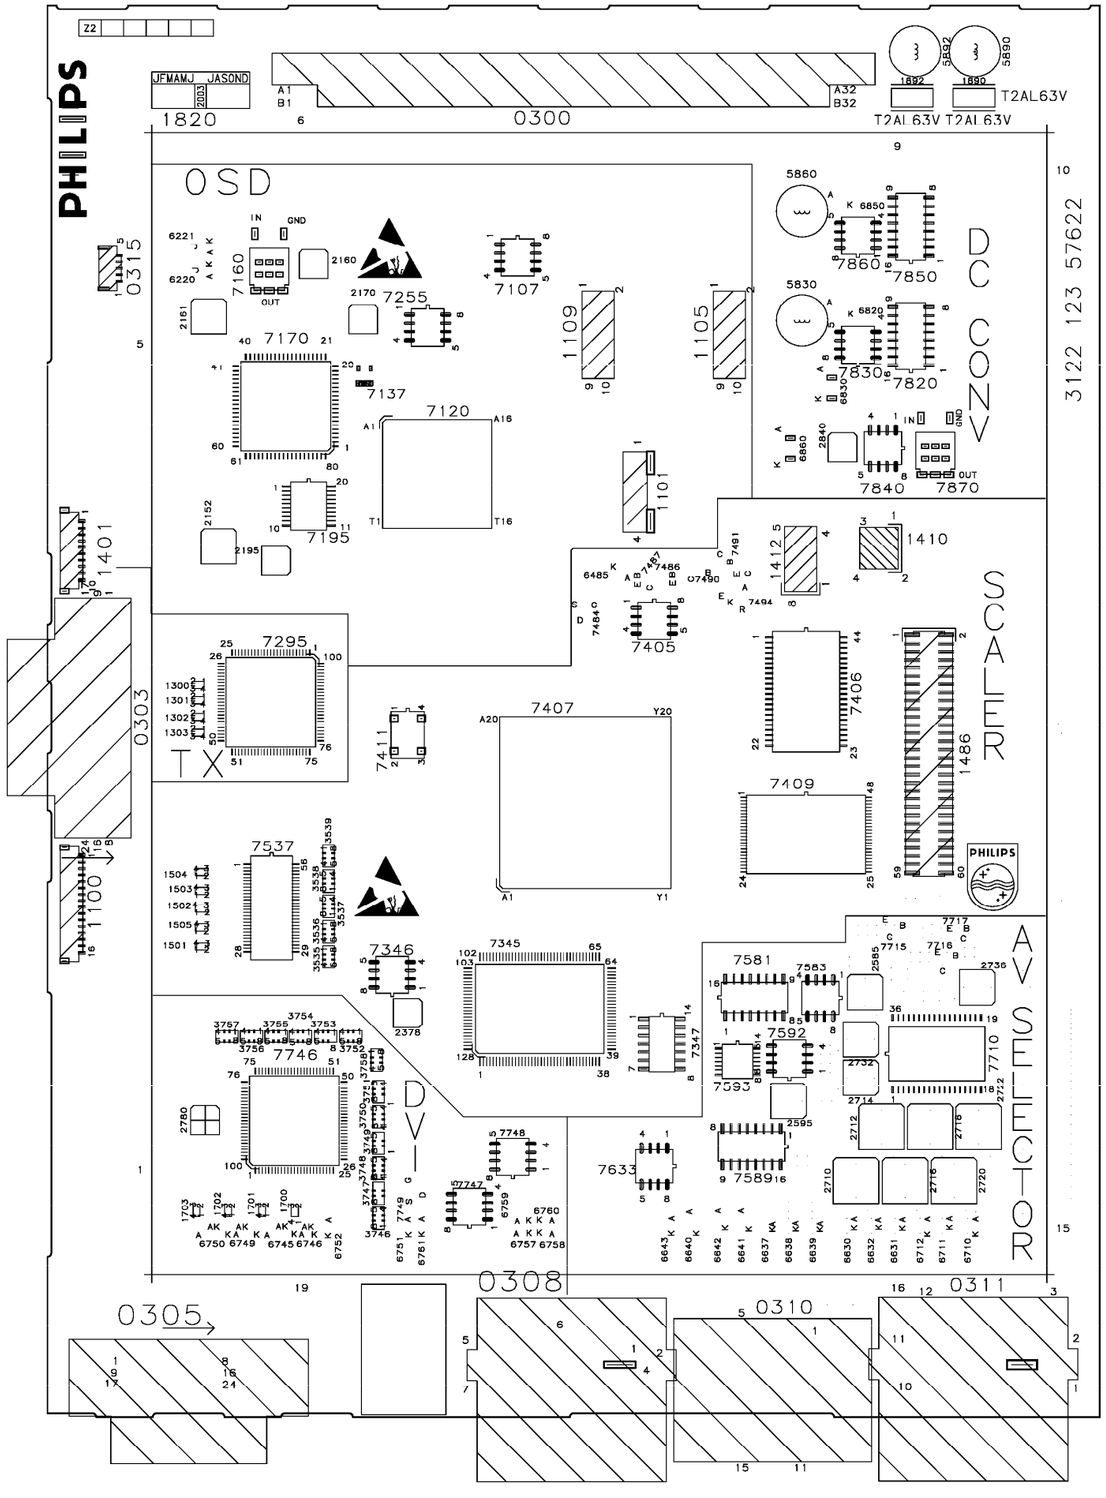

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[SL] SCALER PANEL (Bottom View)

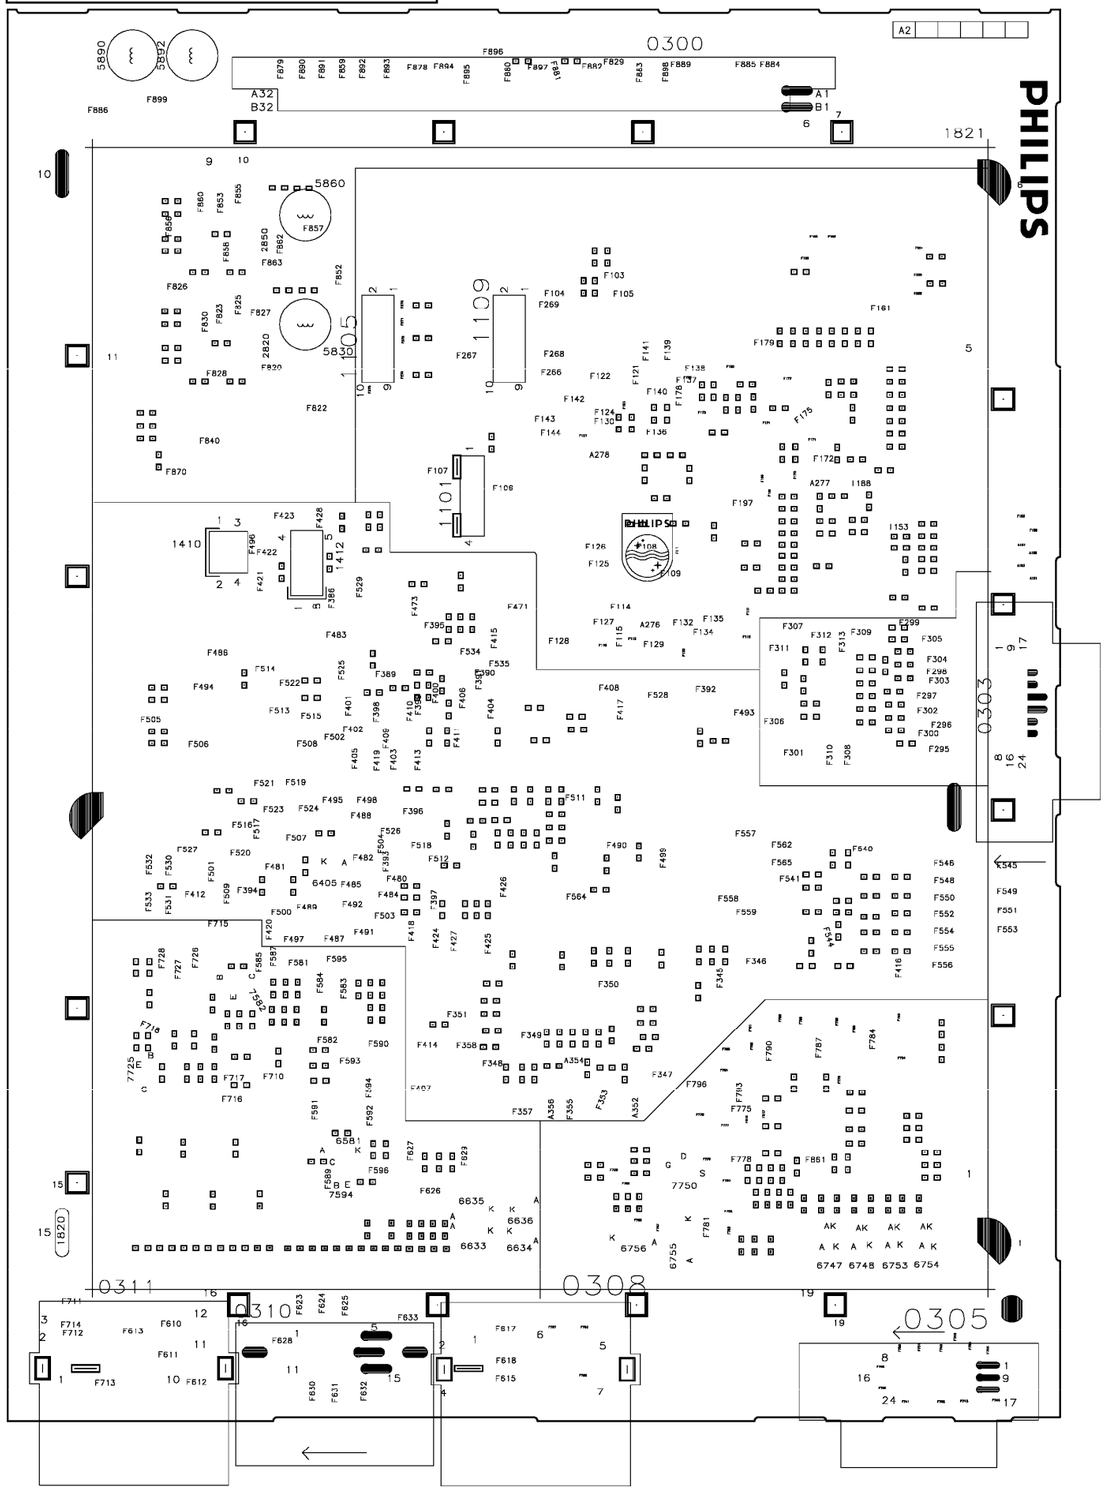

Return to Circuit Board TOC.

[F] DW PIP PANEL (Top View)

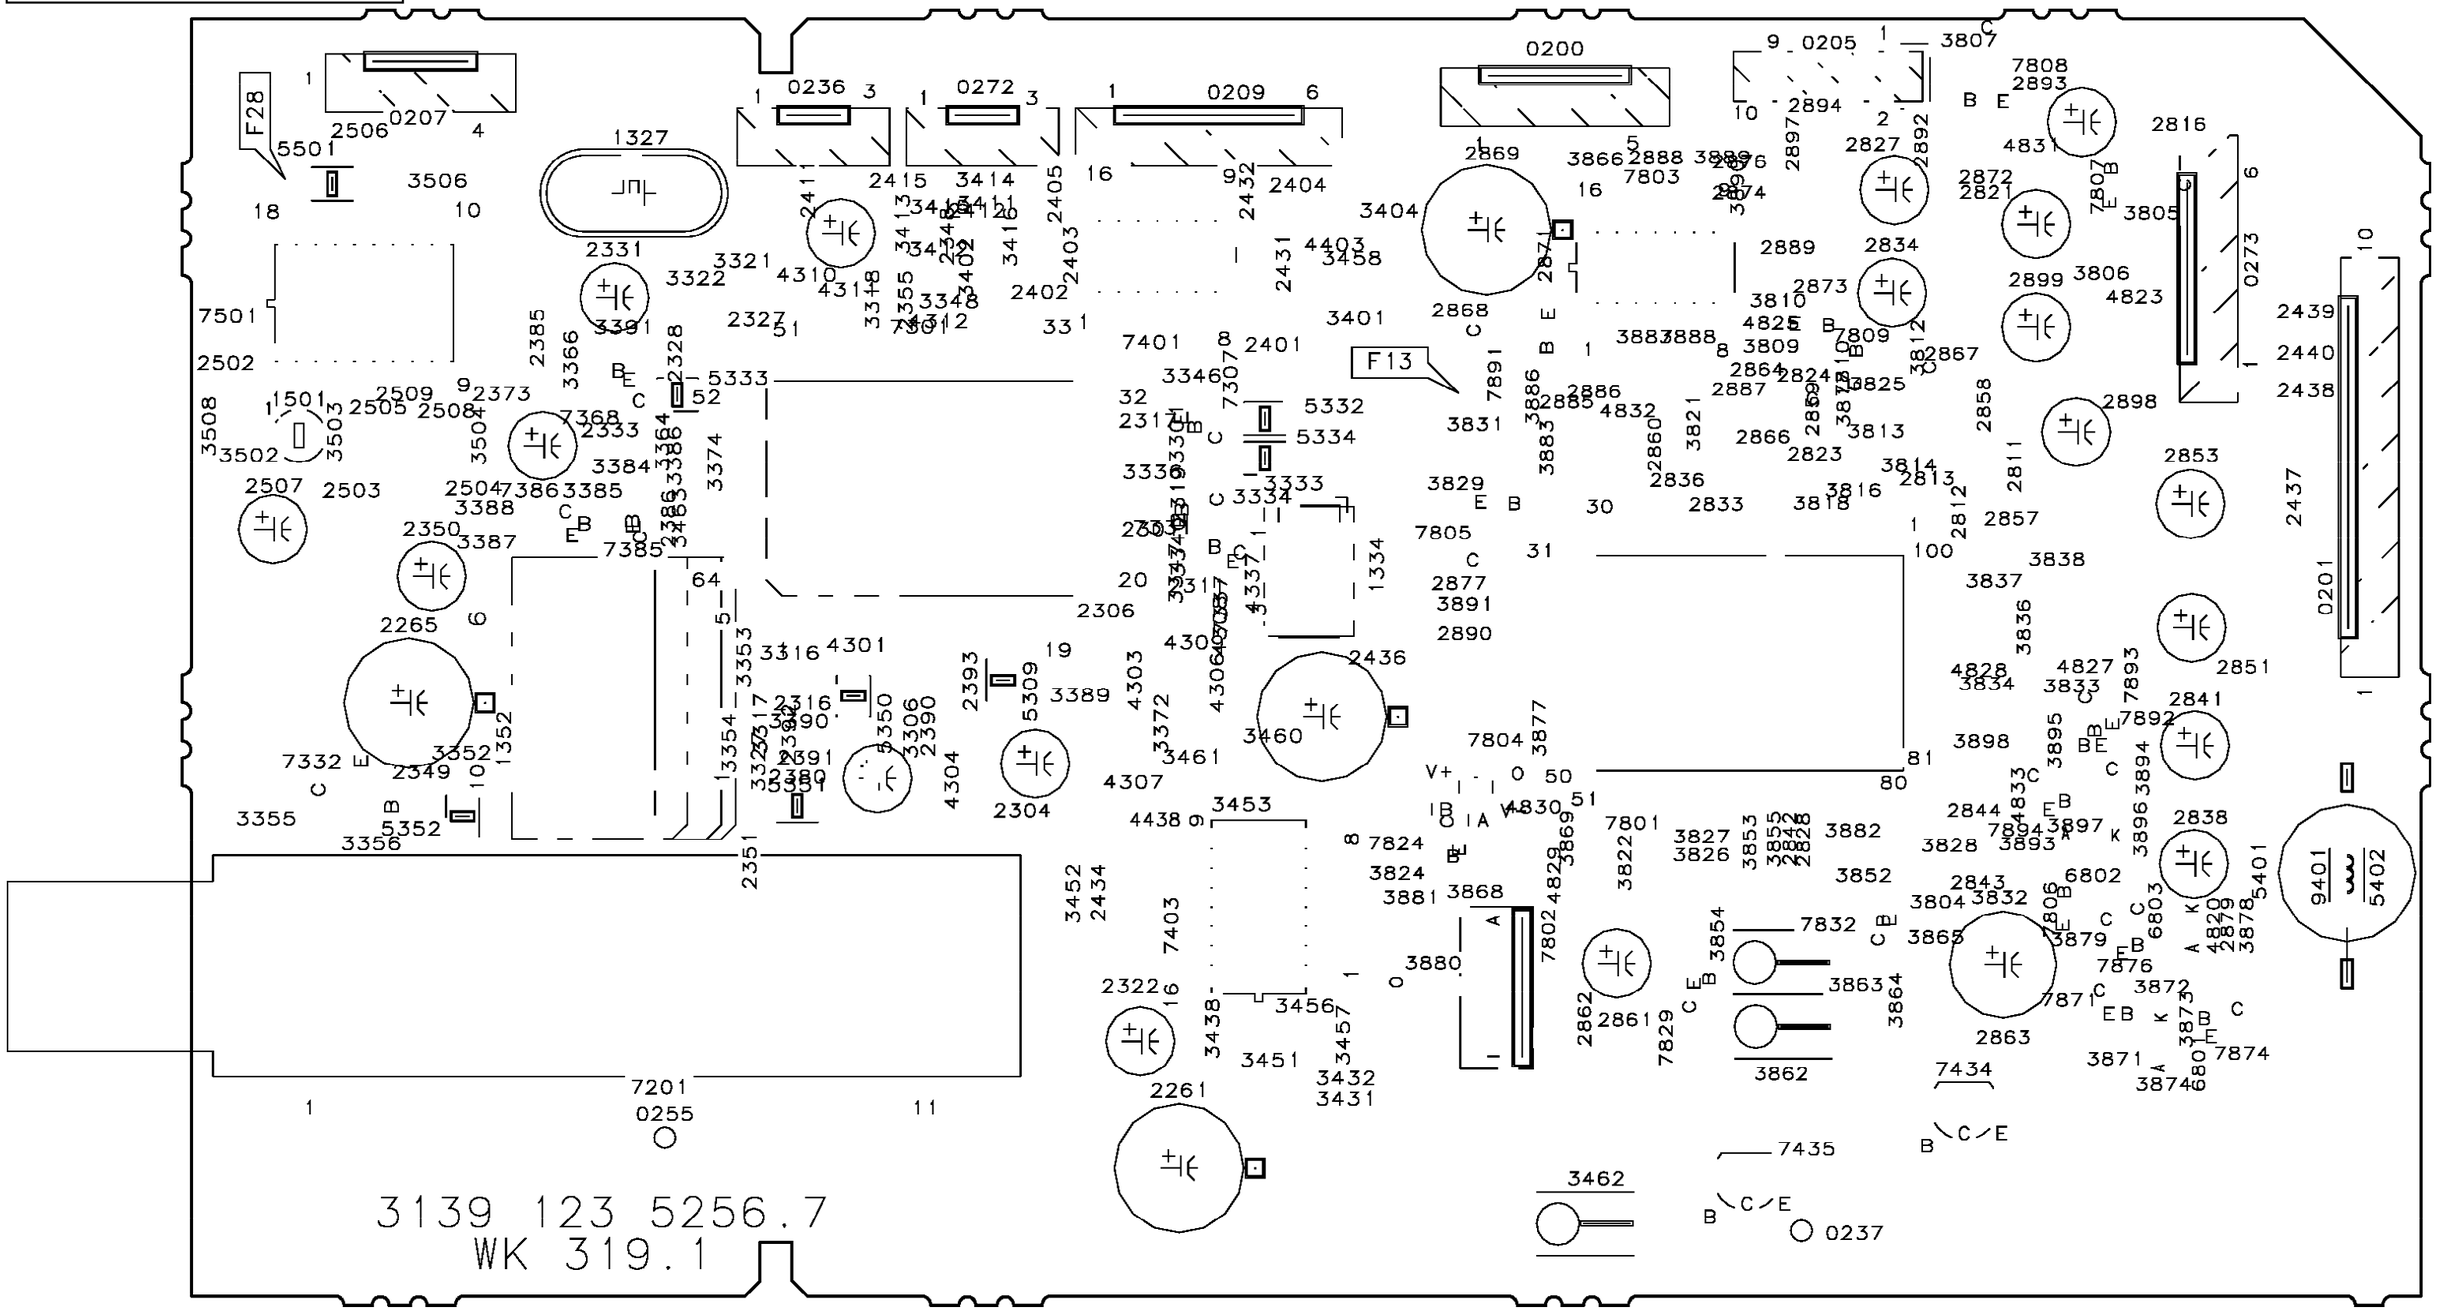

Return to Circuit Board TOC.

Refer to the next page for Bottom Side View.

[F] DW PIP PANEL (Bottom View)

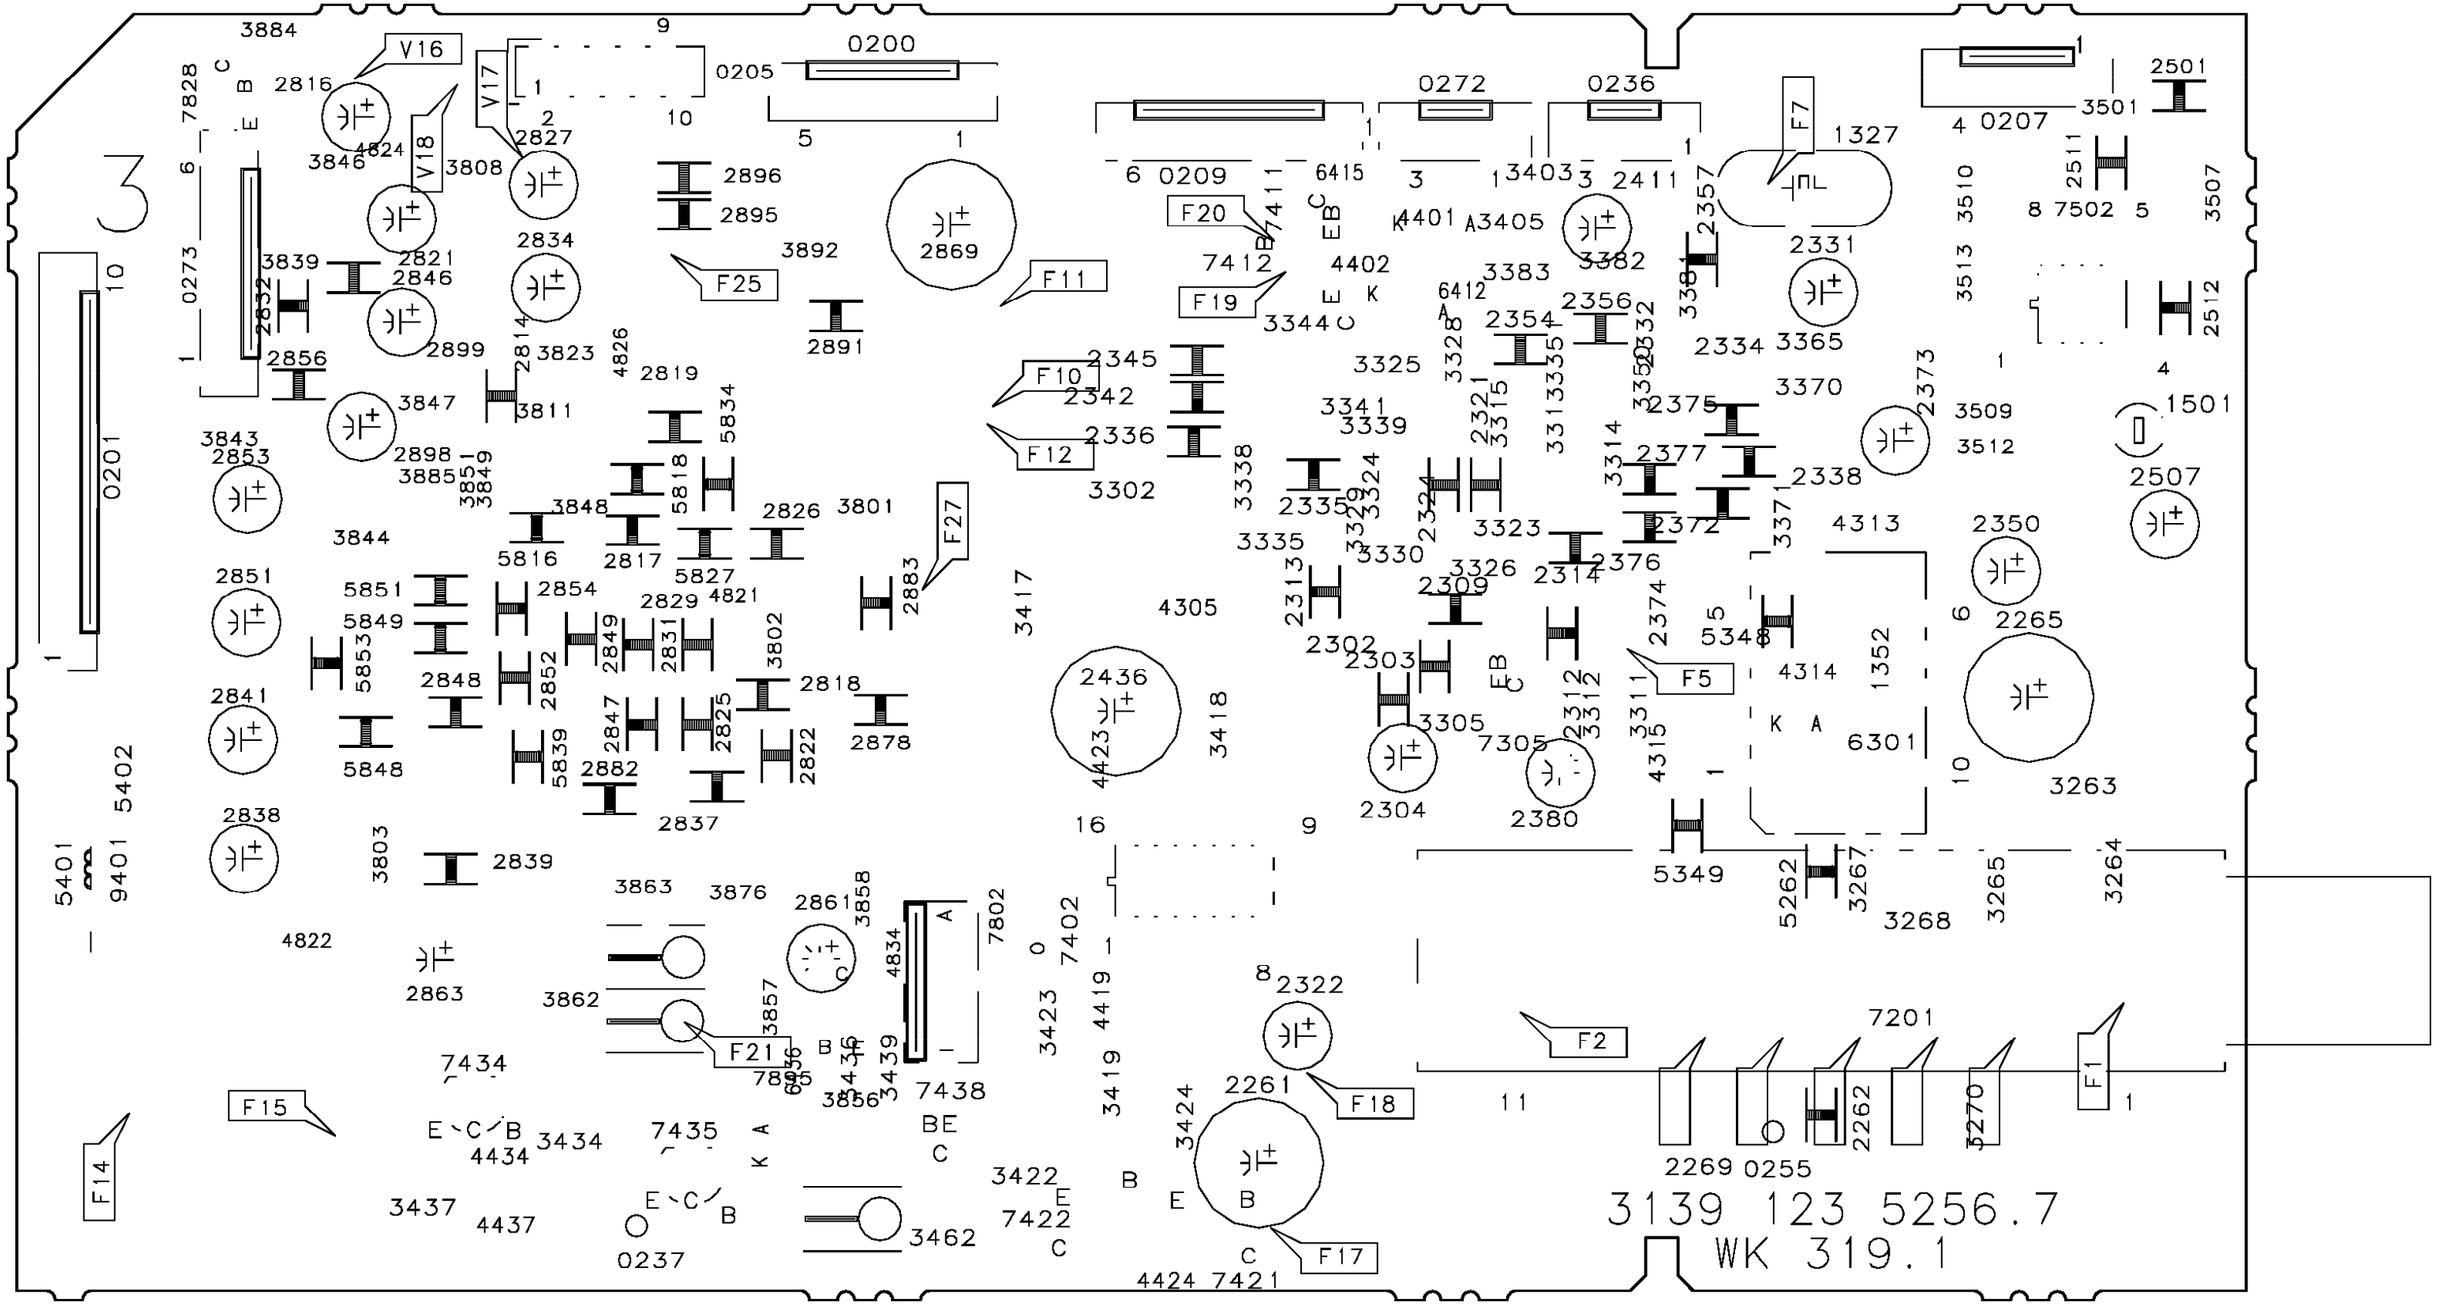

Return to Circuit Board TOC.

[CB1] 3D COMB FILTER PANEL (Top View)

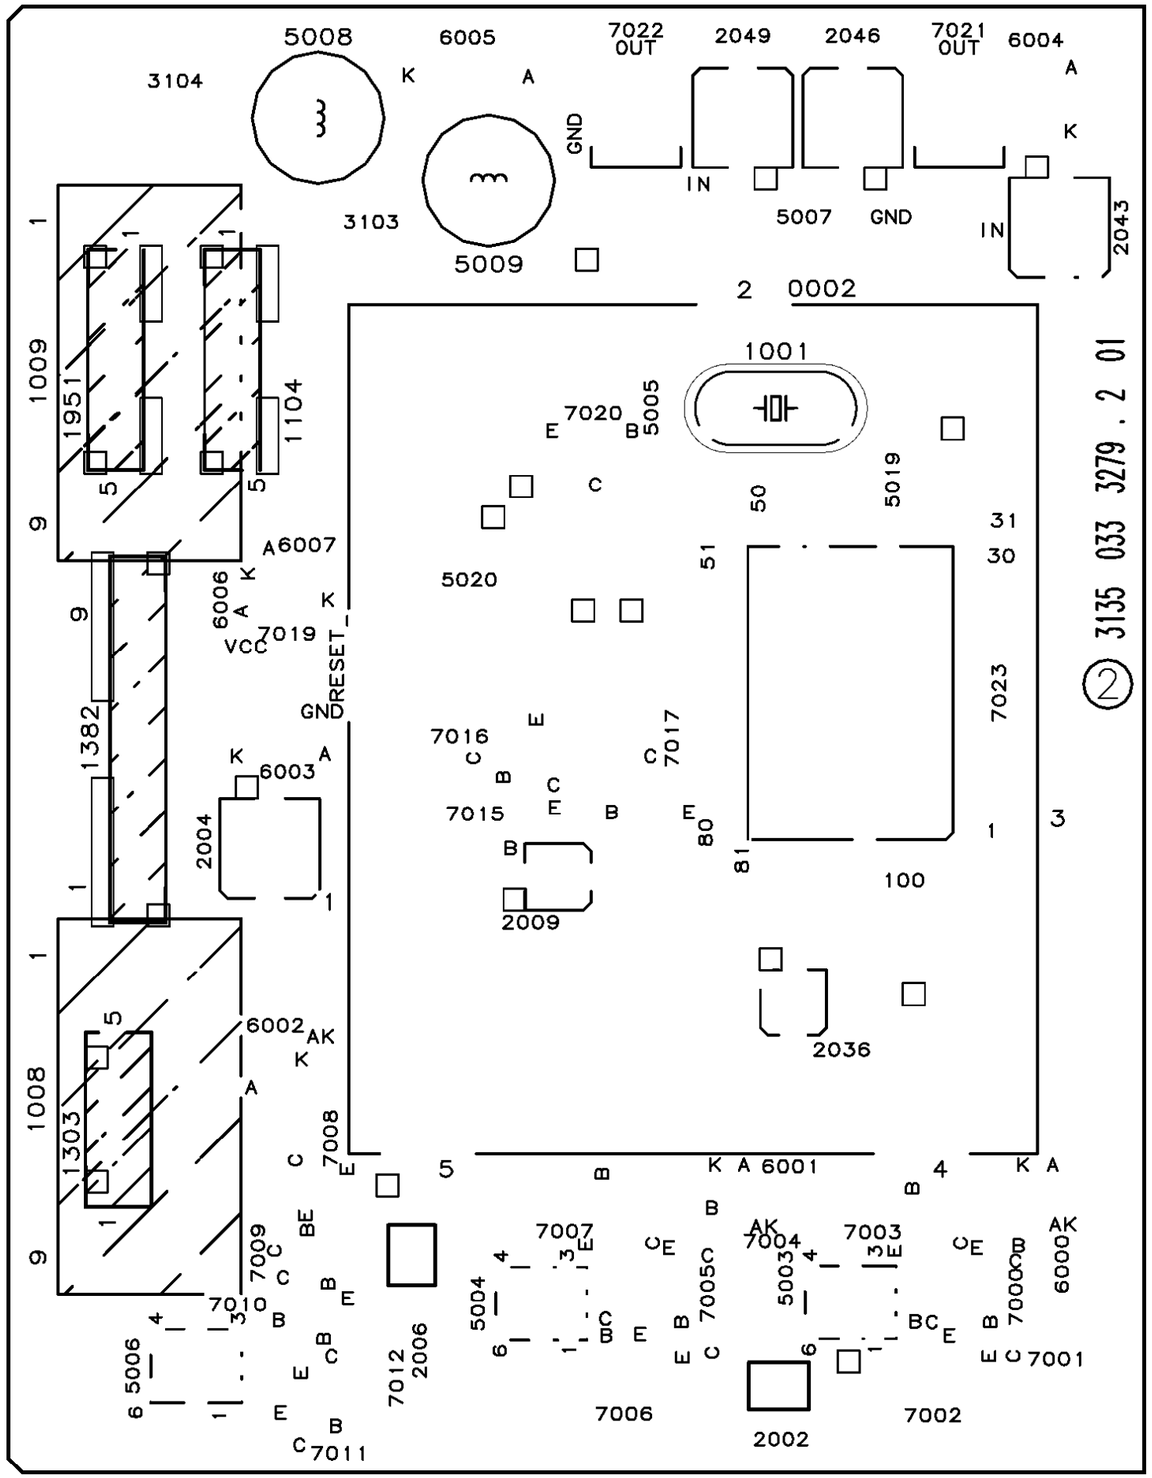

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[CB1] 3D COMB FILTER PANEL (Bottom View)

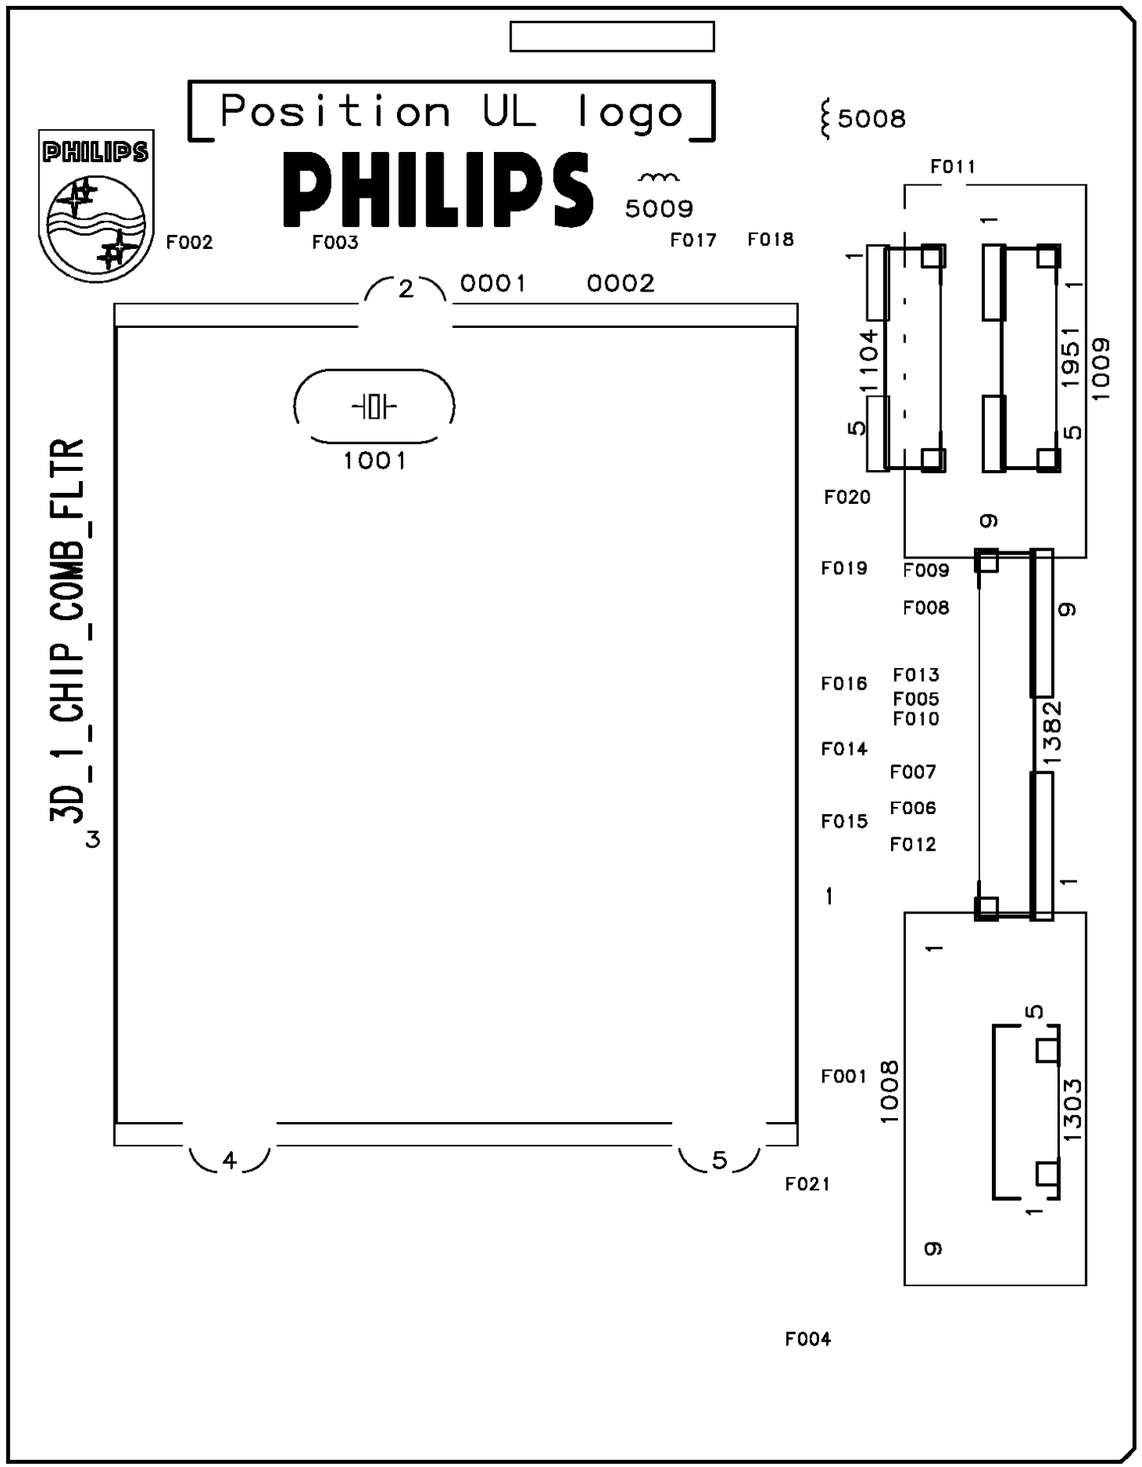

Return to Circuit Board TOC.

[V] REAR JACK PANEL (Top View)

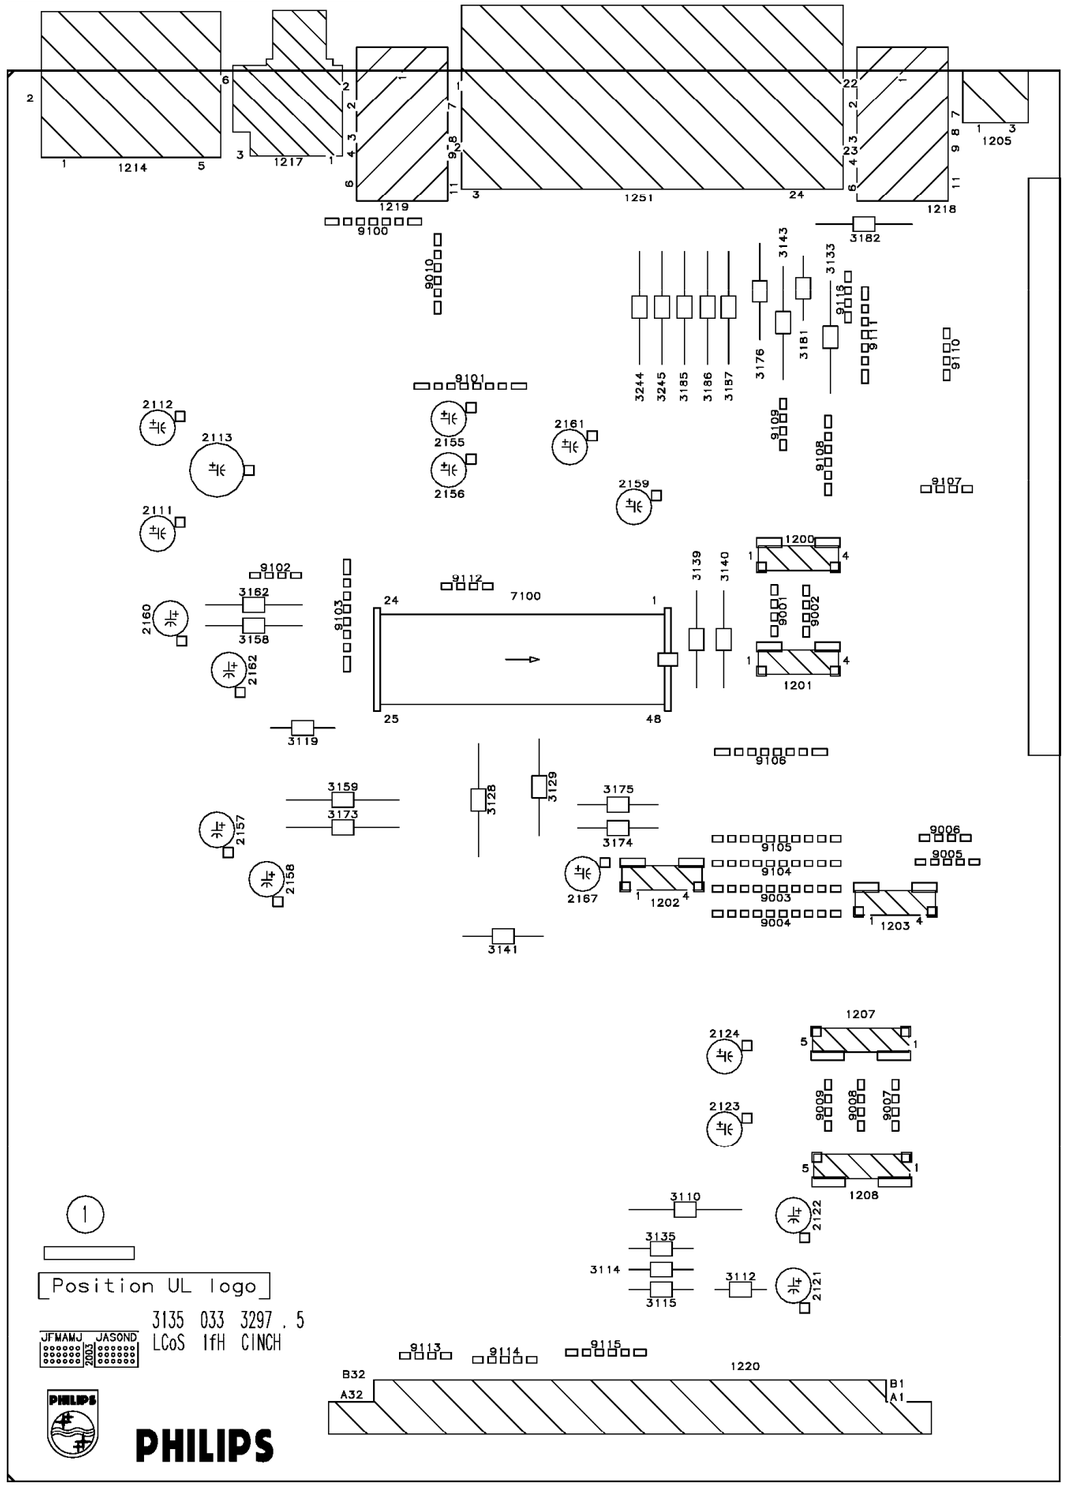

1

Position UL logo

3135 033 3297.5
LCoS 1fH CINCH

JFMAMJ JASOND 2003

PHILIPS

PHILIPS

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[V] REAR JACK PANEL (Bottom View)

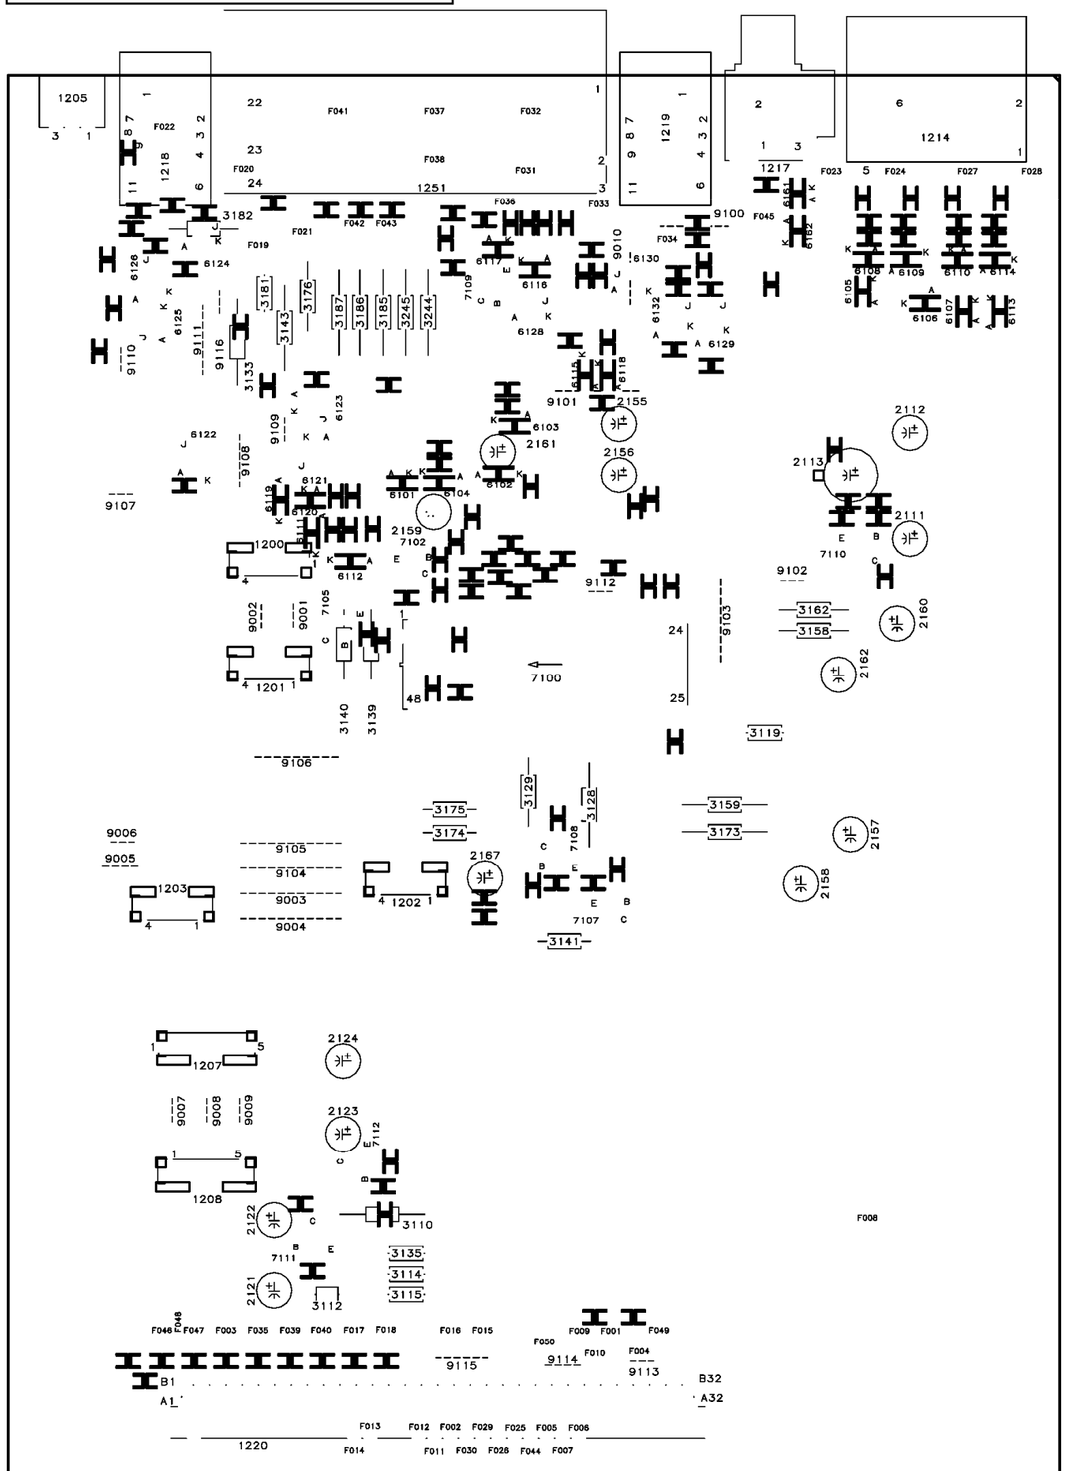

Return to Circuit Board TOC.

[O1] SIDE JACK PANEL (Top View)

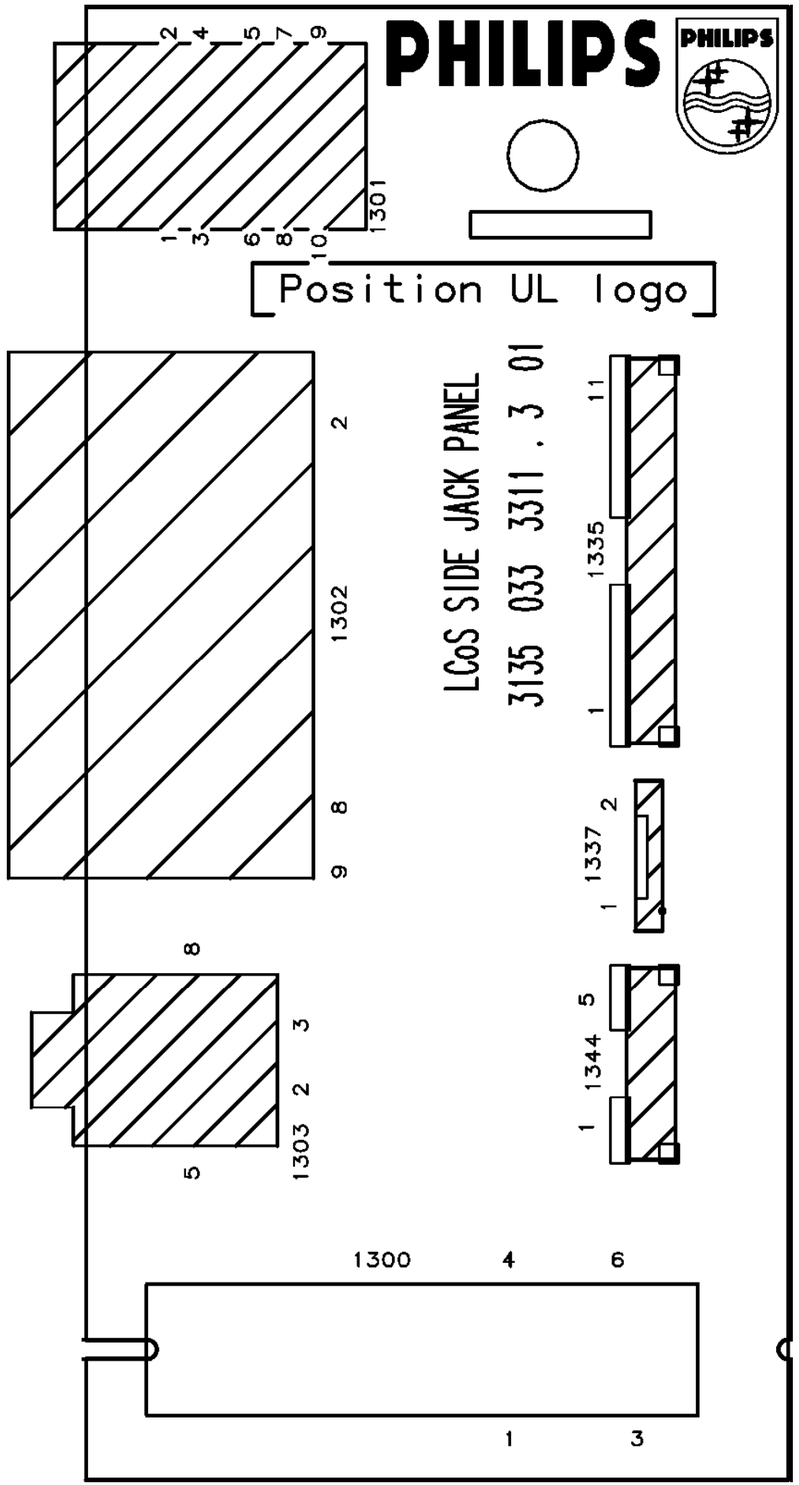

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[O1] SIDE JACK PANEL (Bottom View)

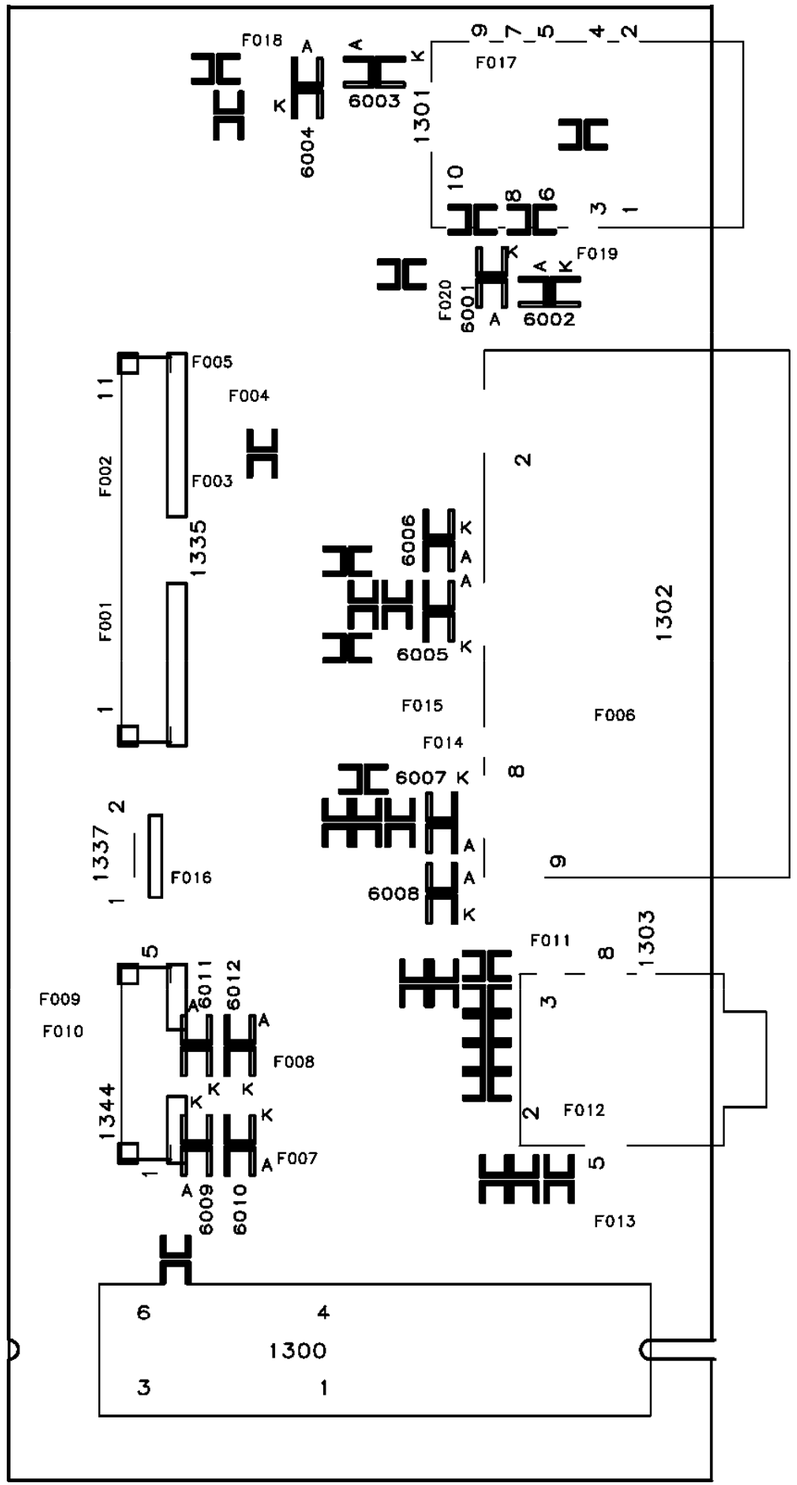

Return to Circuit Board TOC.

[LS] LED/SENSOR PANEL (Top View)

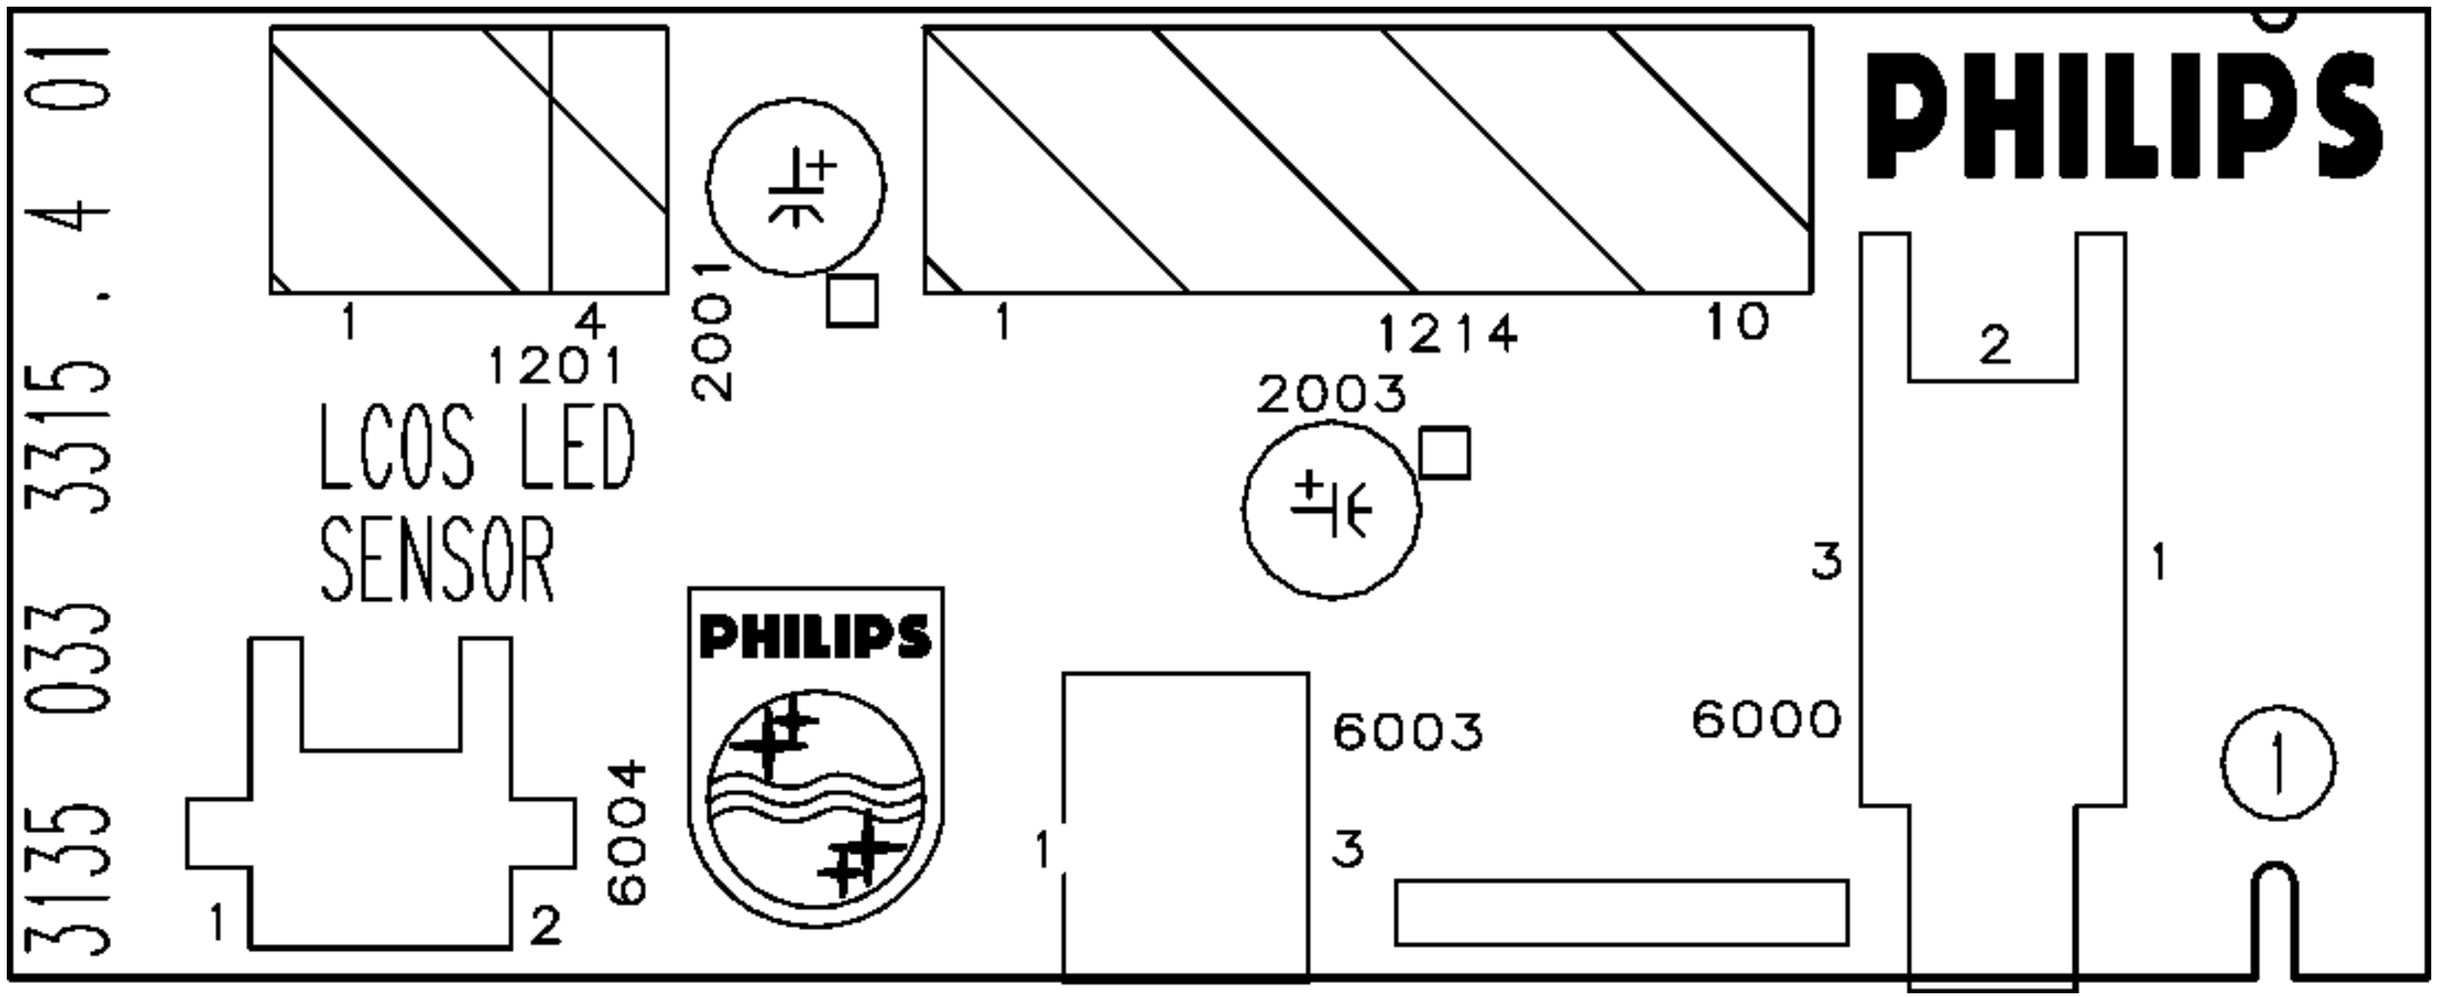

Return to Circuit Board TOC.

Refer to the next page for Bottom Side View.

[LS] LED/SENSOR PANEL (Bottom View)

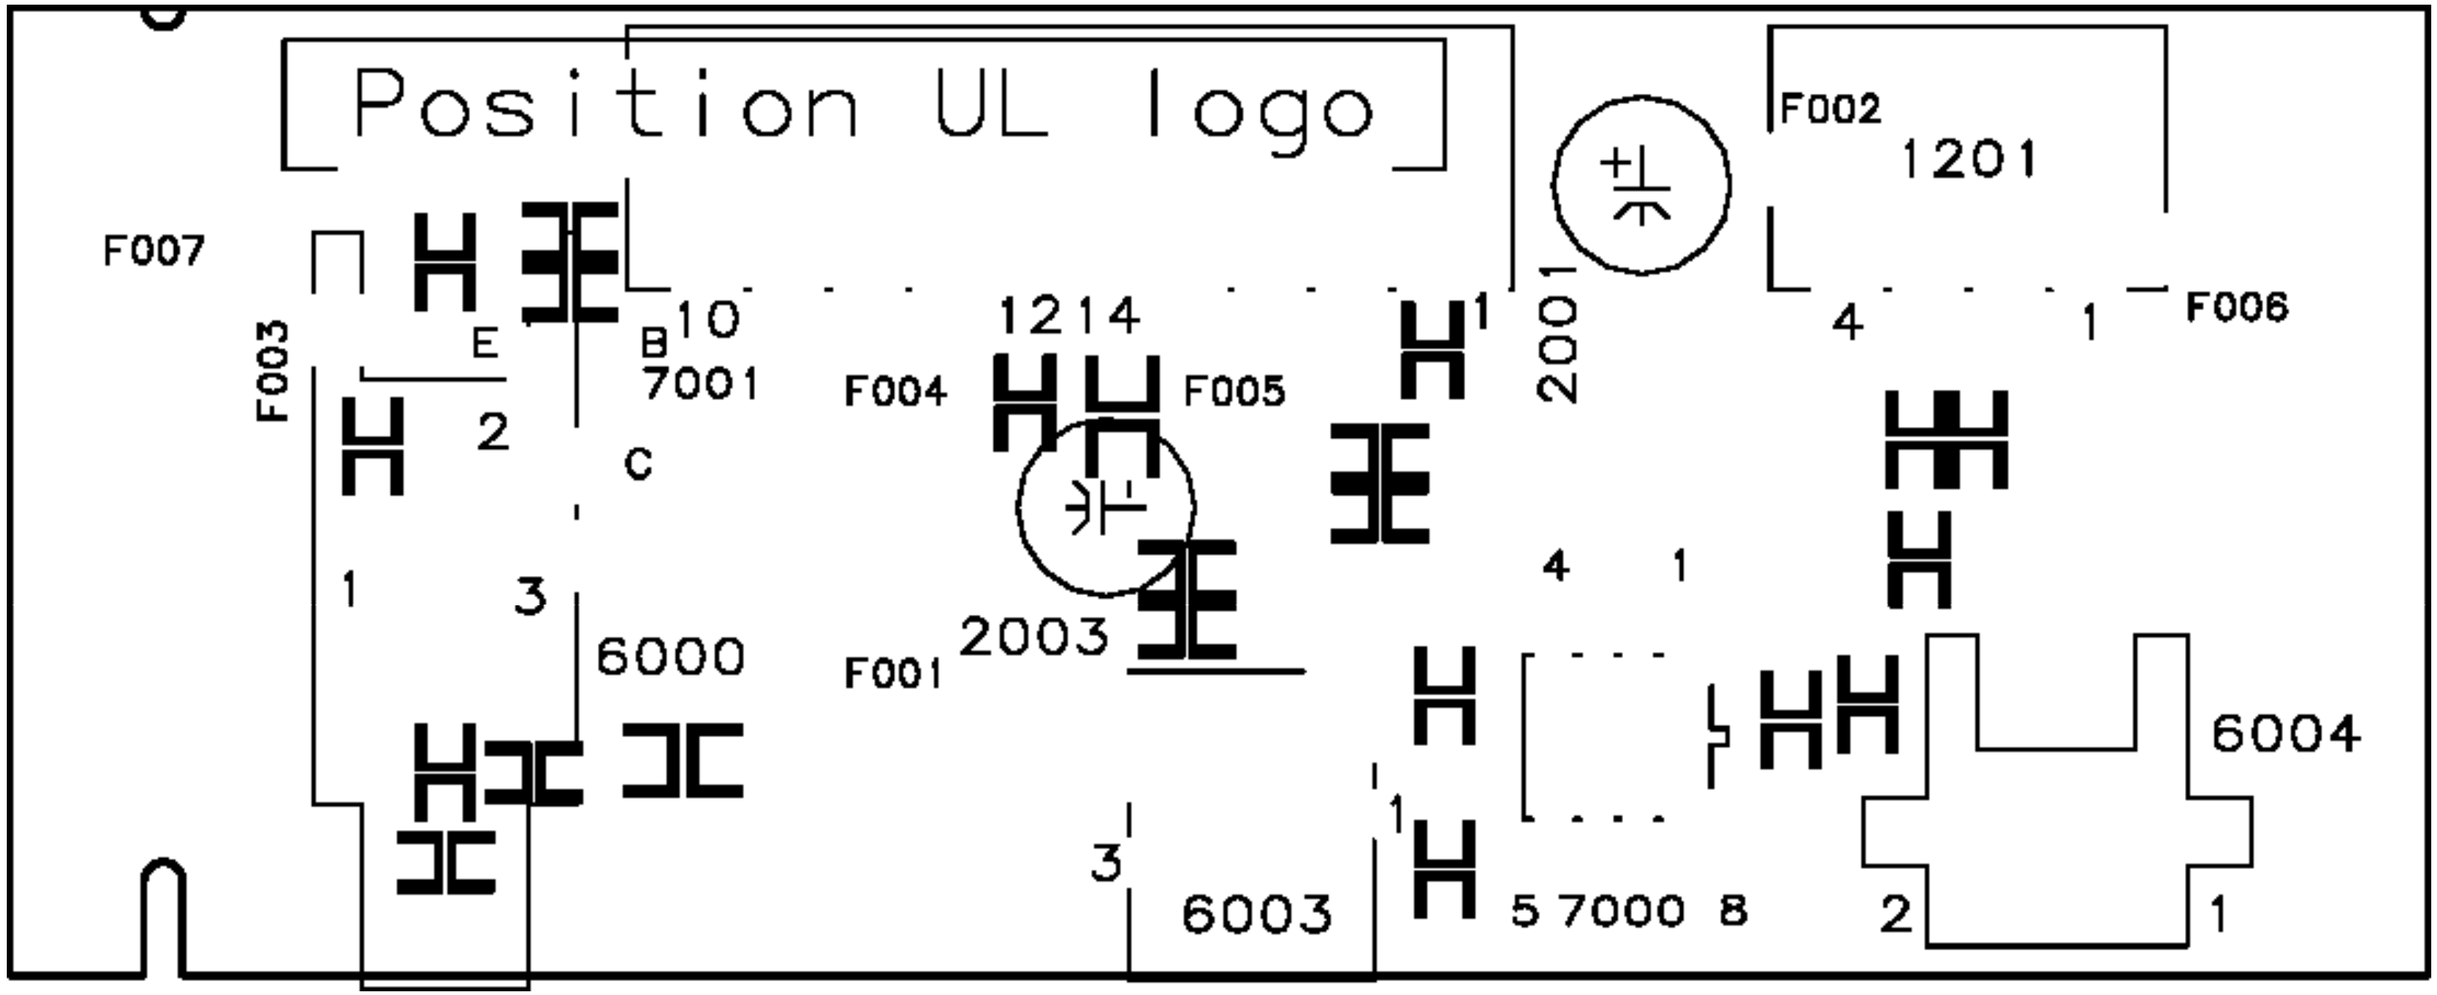

Return to Circuit Board TOC.

[P1] LED/KEYBOARD PANEL (Top View)

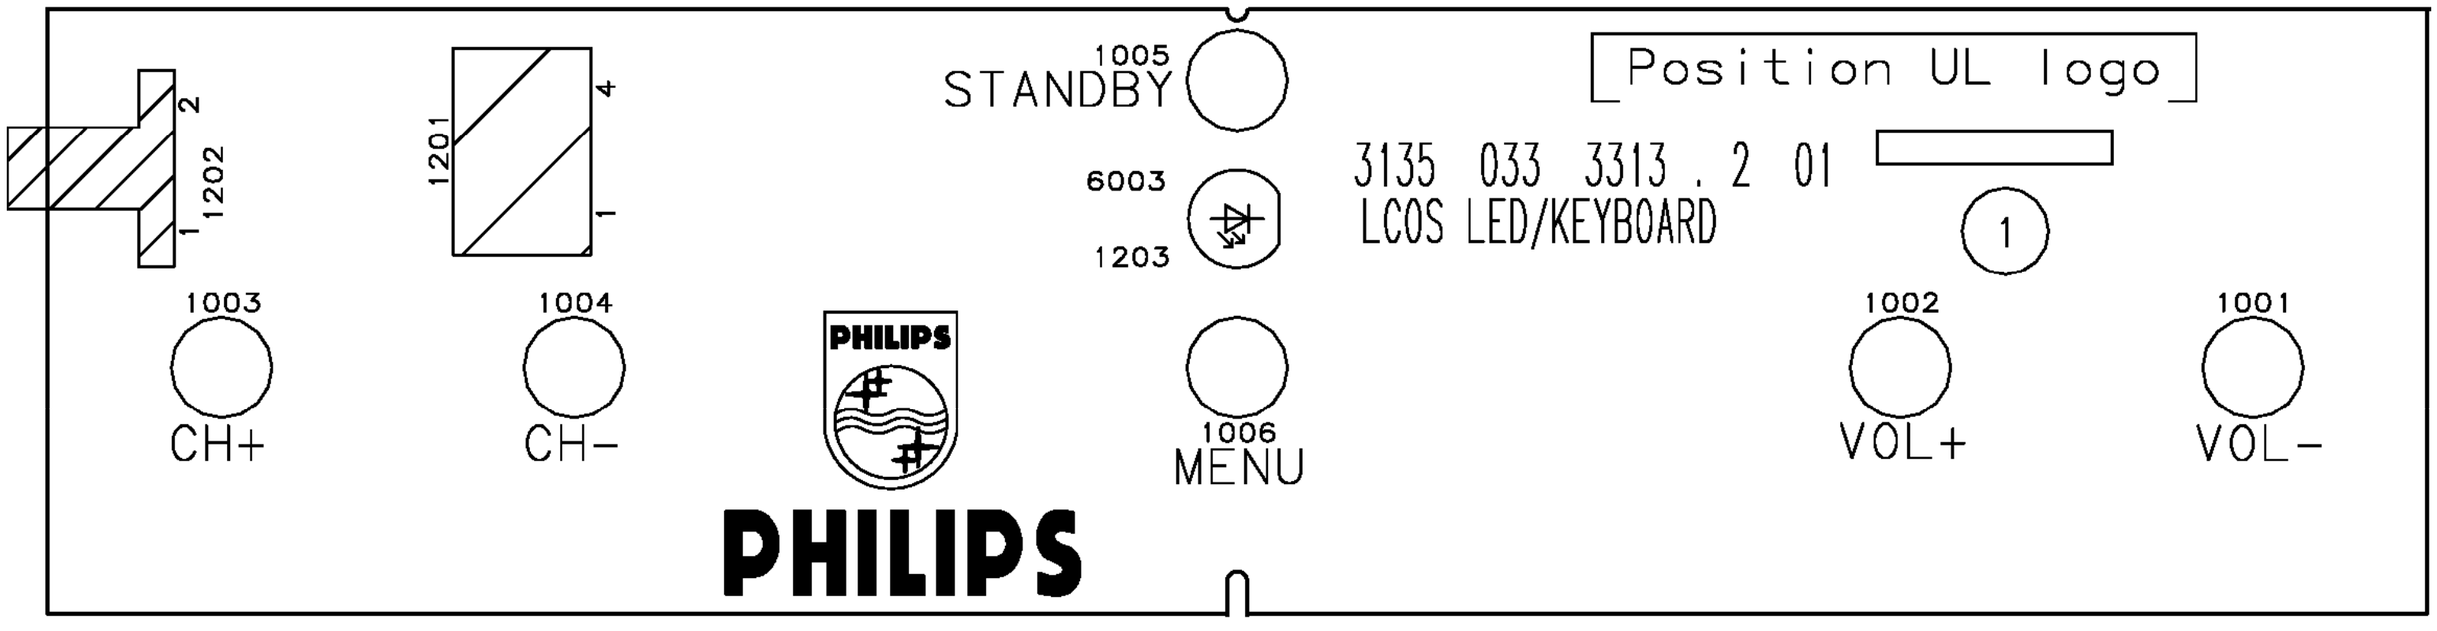

Return to Circuit Board TOC.

Refer to the next page for Bottom Side View.

[P1] LED/KEYBOARD PANEL (Bottom View)

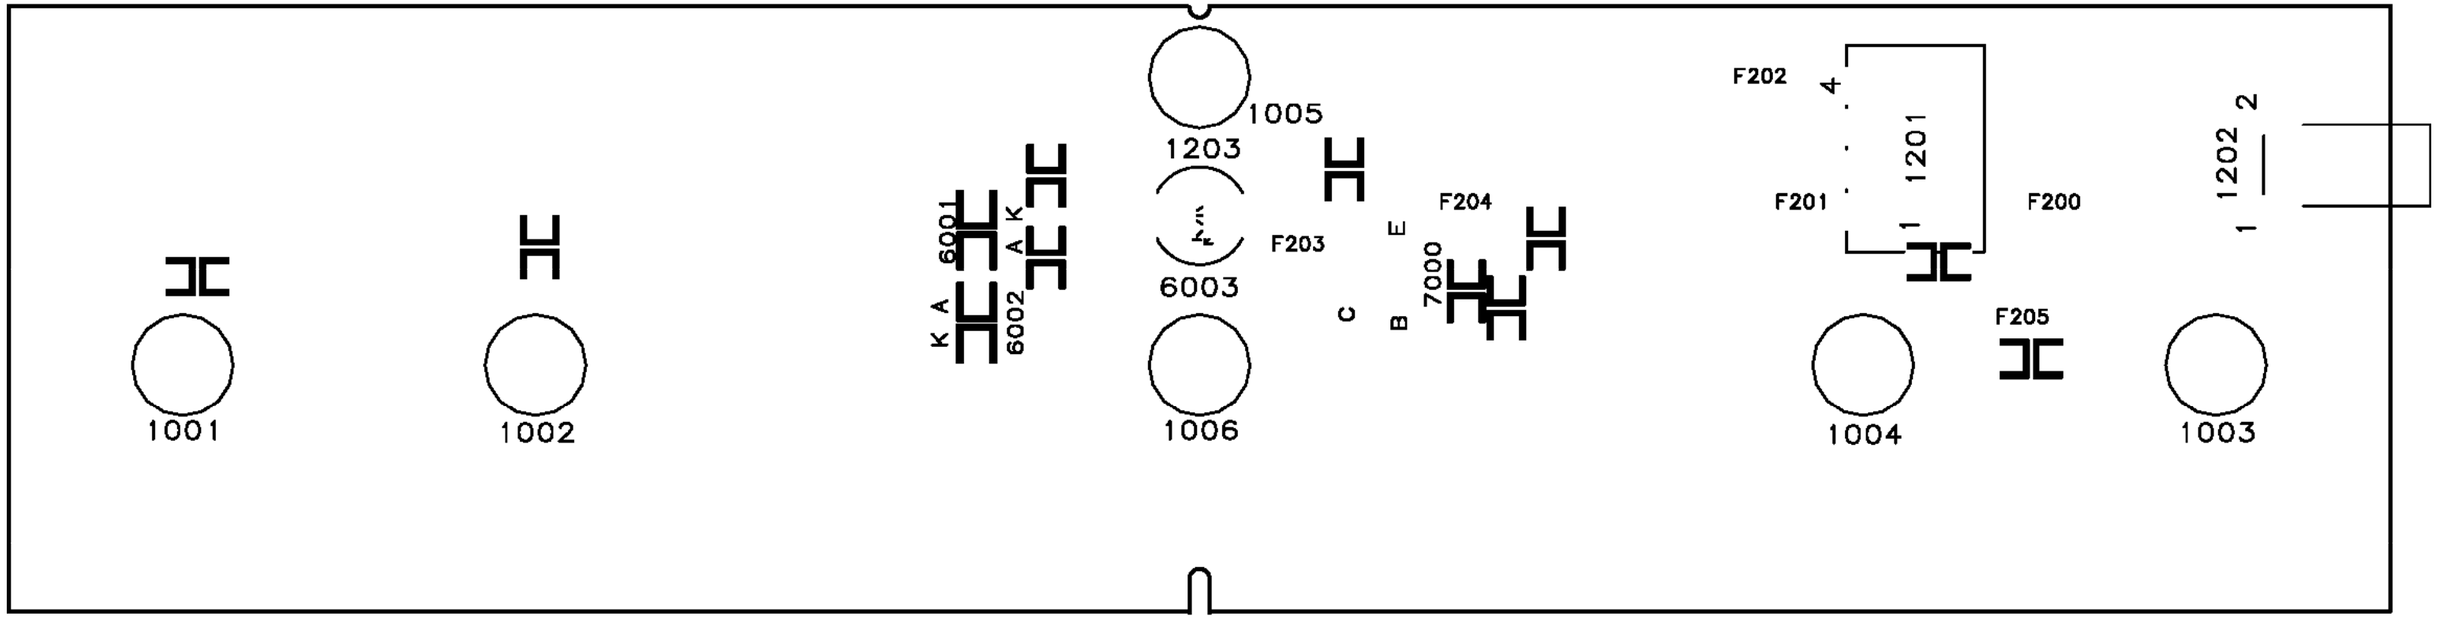

Return to Circuit Board TOC.

[TS1] THERMAL SENSOR PANEL (Top View)

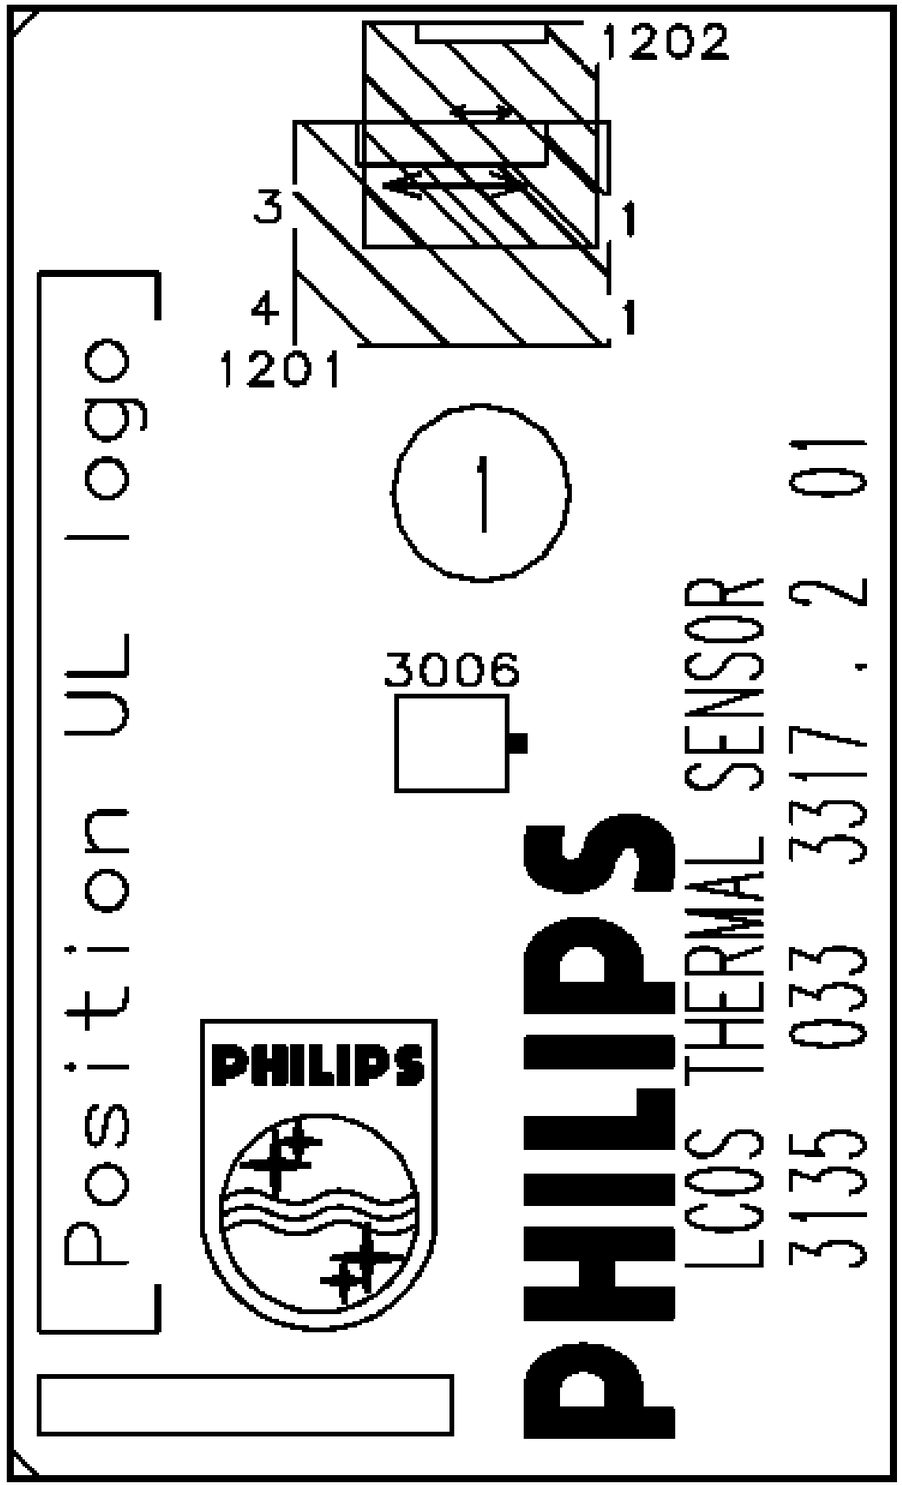

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[TS1] THERMAL SENSOR PANEL (Bottom View)

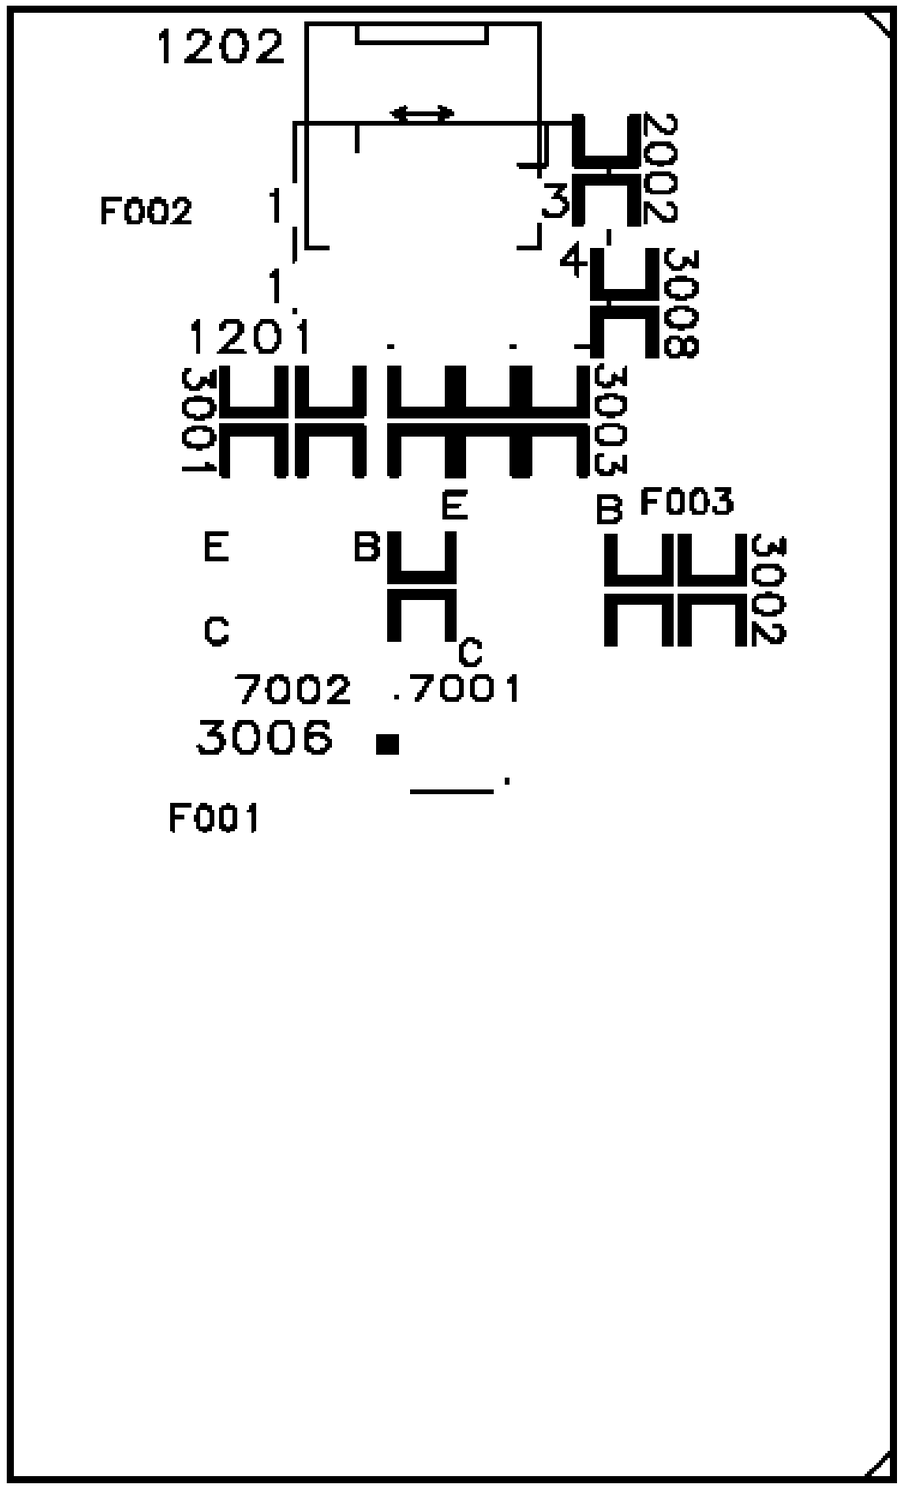

Return to Circuit Board TOC.

[AA1] AUDIO AMPLIFIER PANEL (Top View)

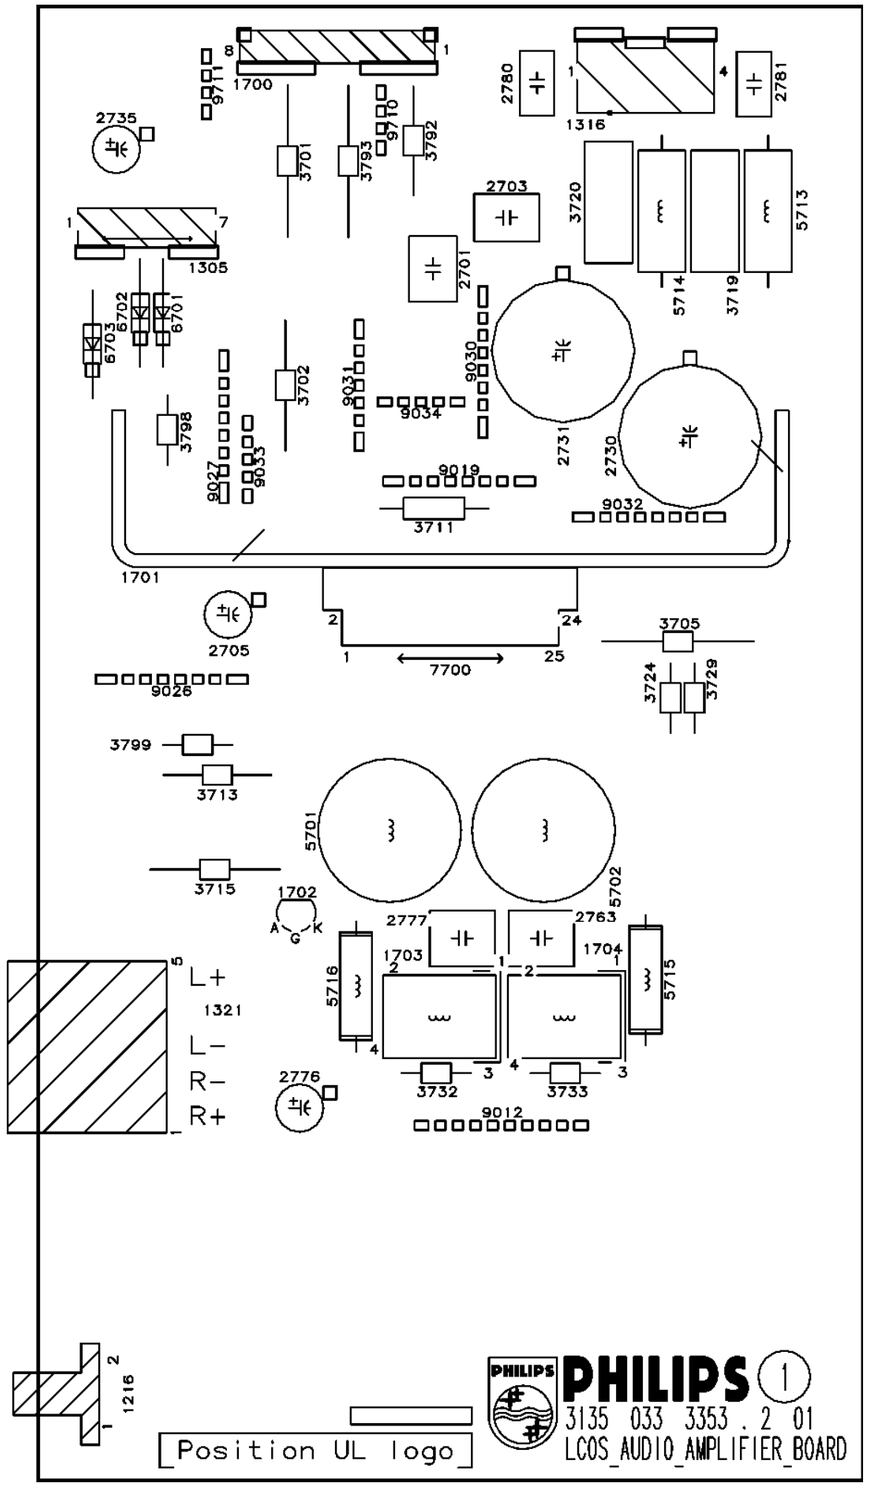

Refer to the next page for Bottom Side View.

Return to Circuit Board TOC.

[AA1] AUDIO AMPLIFIER PANEL (Bottom View)

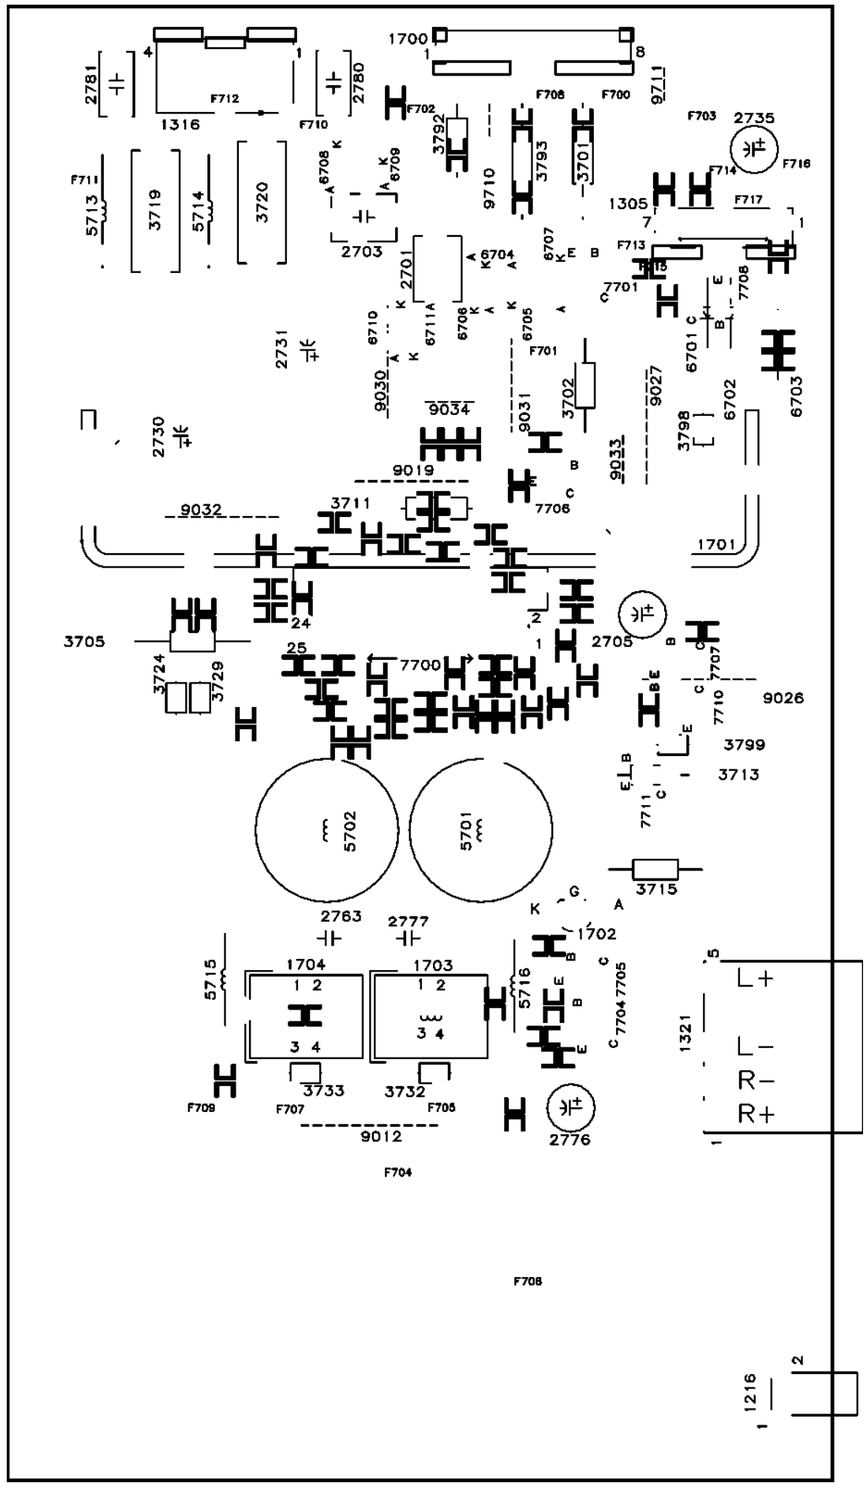

Return to Circuit Board TOC.

Center Ch. Sw. (Top View)

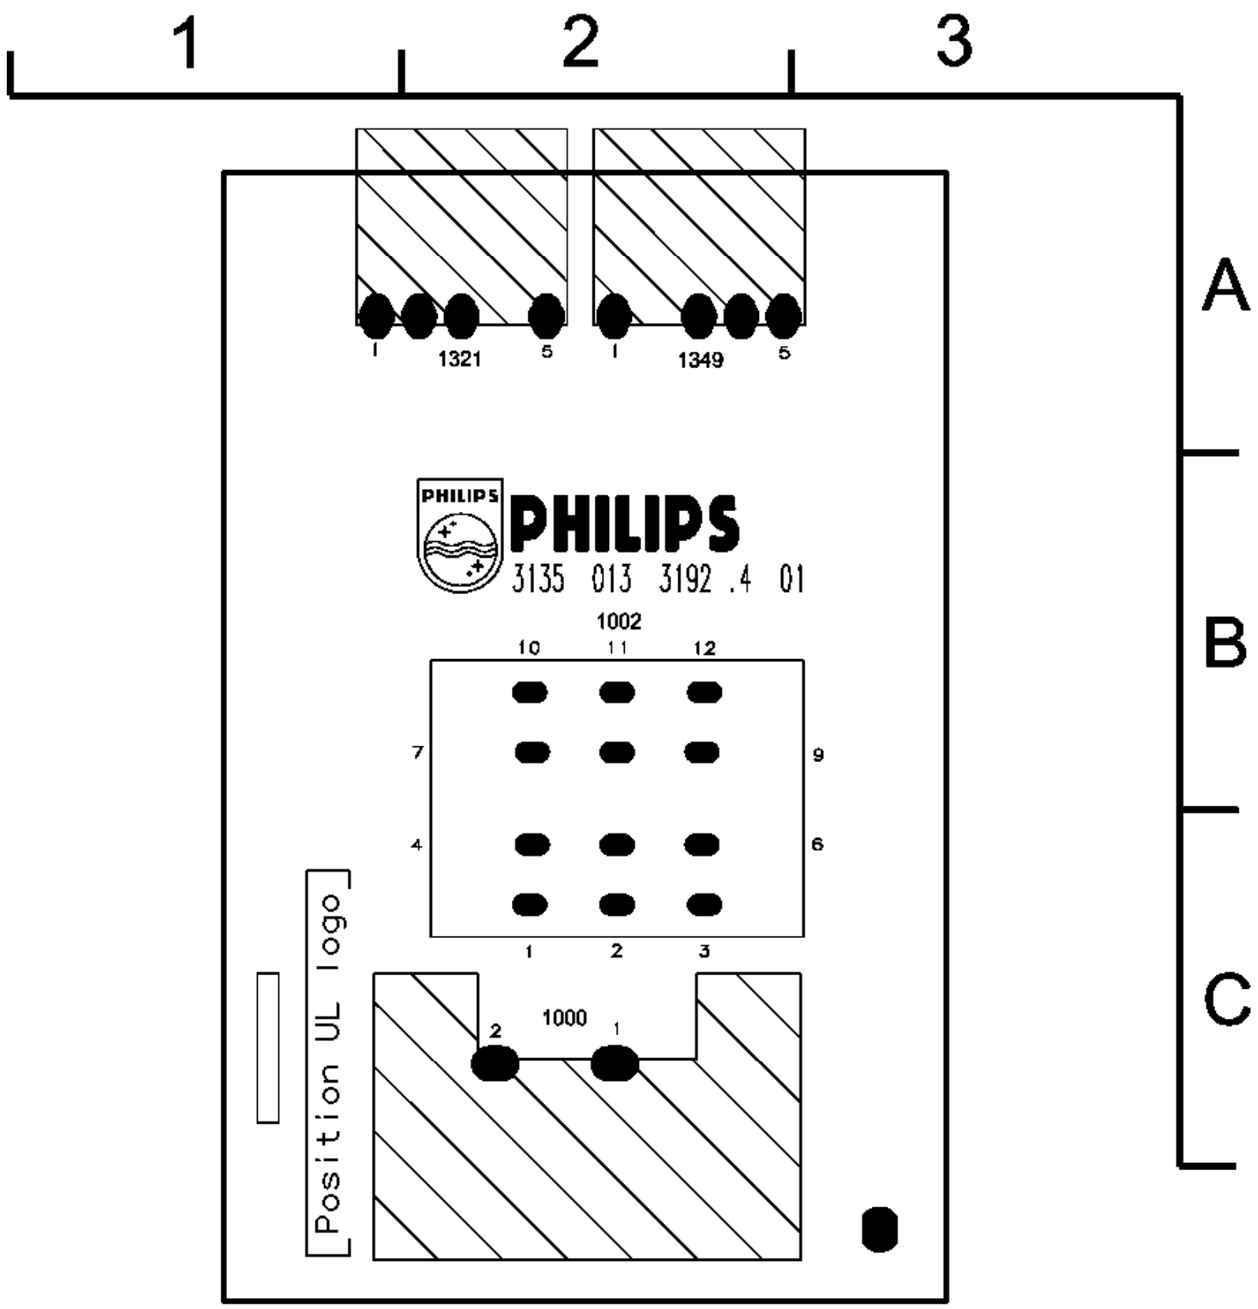

Refer to the next page for Bottom Side View.

1000 C2
1002 B2
1321 A2
1349 A2

Return to Circuit Board TOC.

Center Ch. Sw. (Bottom View)

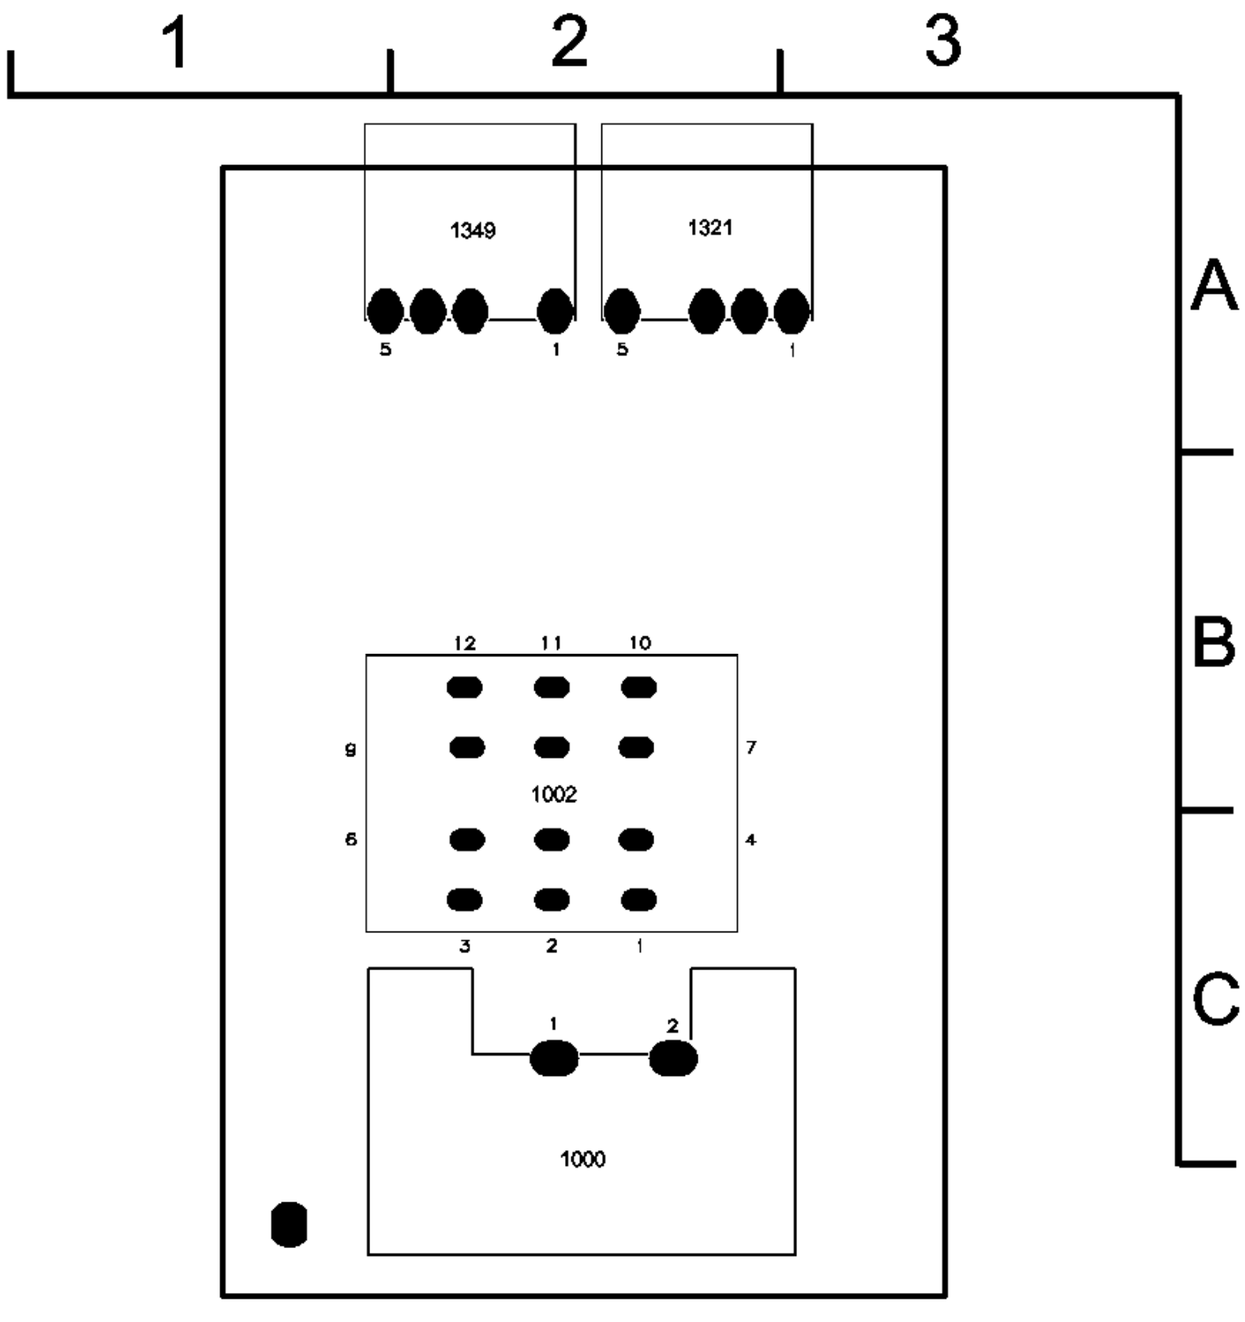

1000 C2
1002 B2
1321 A2
1349 A2

Return to Circuit Board TOC.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

SCOPE PATTERNS

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

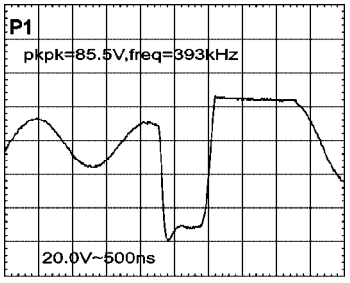

P1

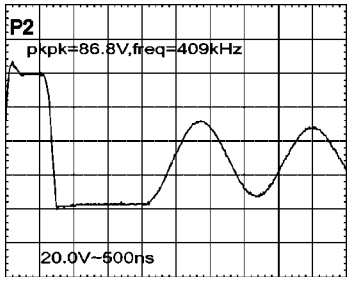

P2



P3



P4

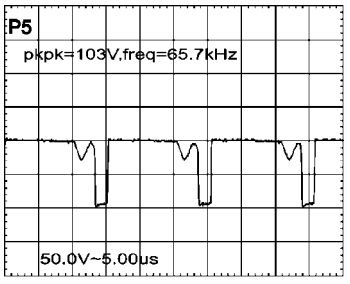

P5

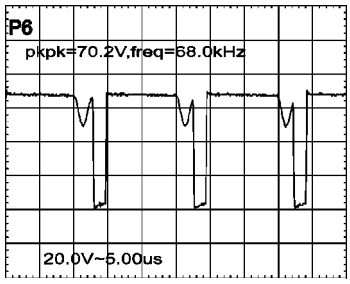

P6

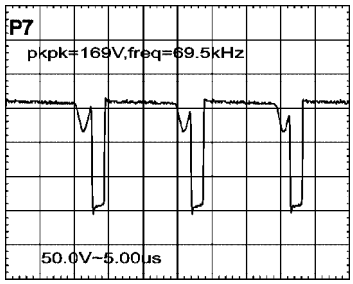

P7

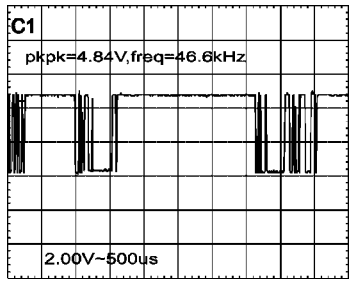

C1

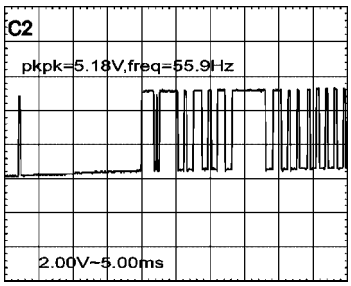

C2

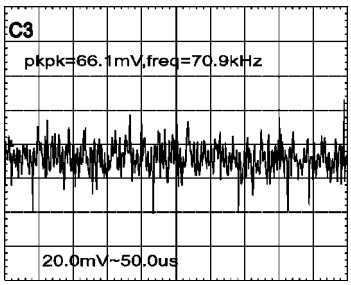

C3

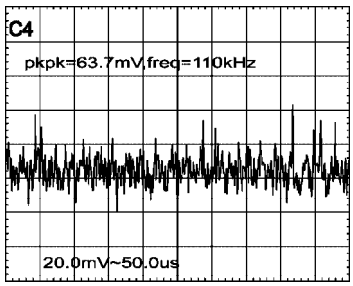

C4

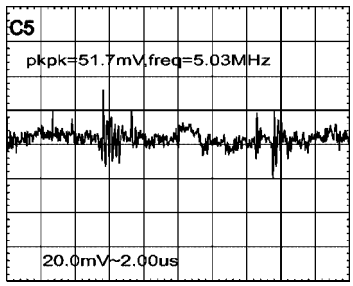

C5



C6

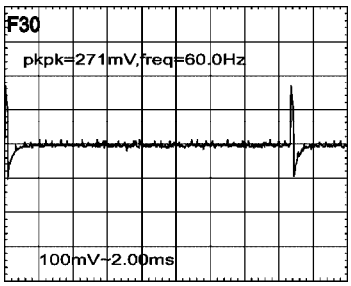

F30

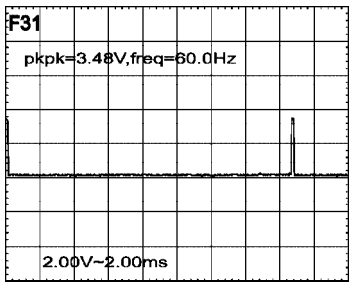

F31



F32



L14

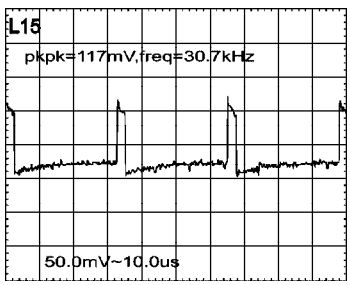

L15



L16

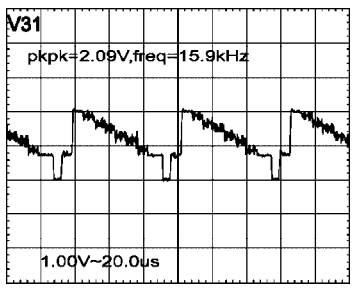

V31

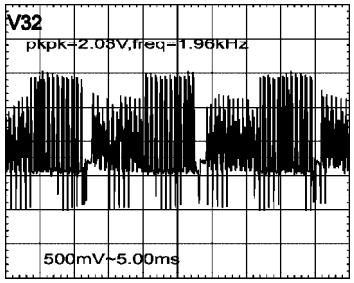

V32



F14



I 6



L 8



V 1



V 2



V 6



V 7



V 8



V 9



V10



L1



L2



L3



L4



L5



L6



L7



L8



L9



F17

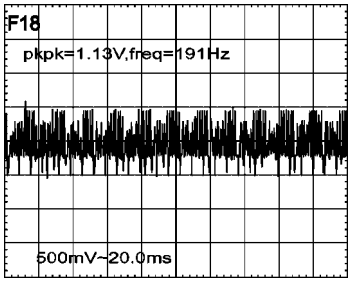

F18



F19



F20



L12



V19



V20



V21



V28



V29



V30



B51



B52



B53



B54



B55



B57



B58



B60



A15



B65



B66



B67



B74



B75



B76



F105

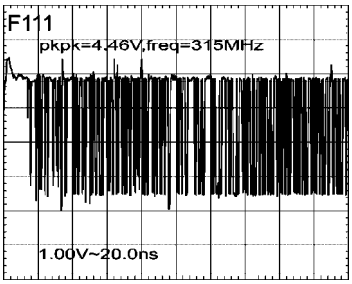

F111

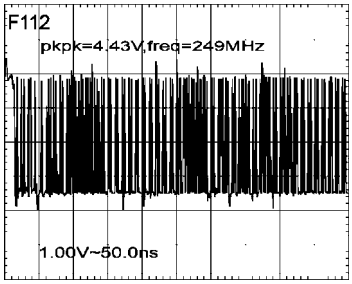

F112

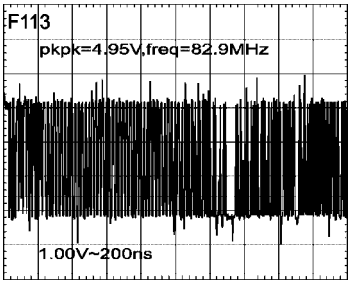

F113

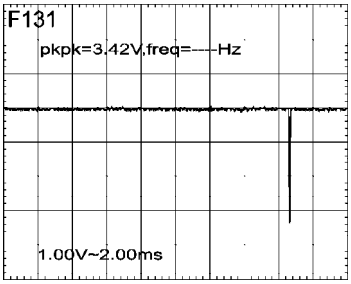

F131

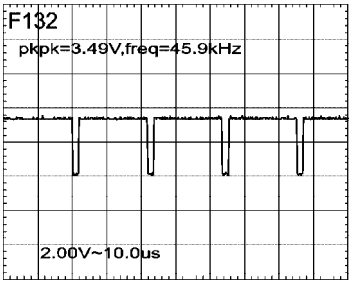

F132

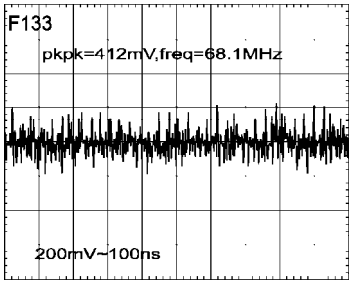

F133

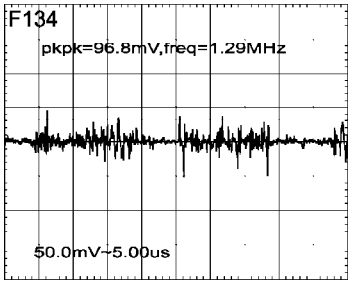

F134

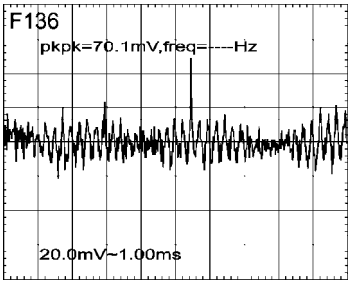

F136

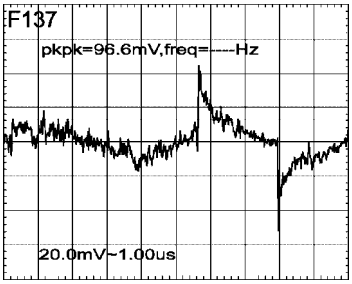

F137

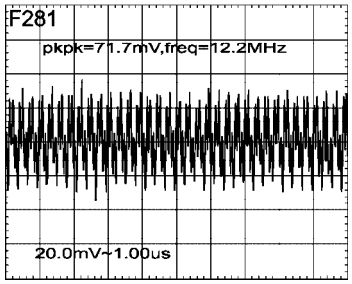

F281

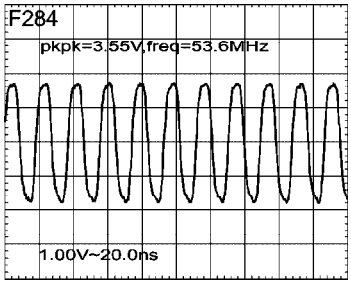

F284

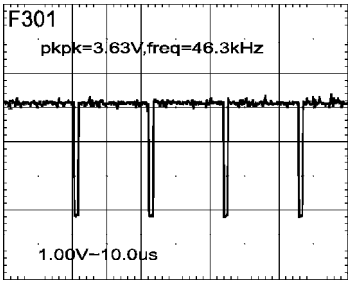

F301



F306

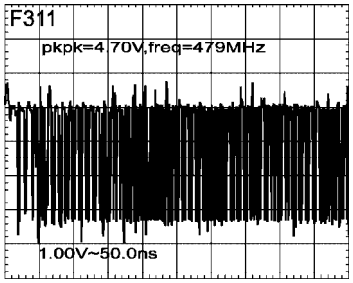

F311

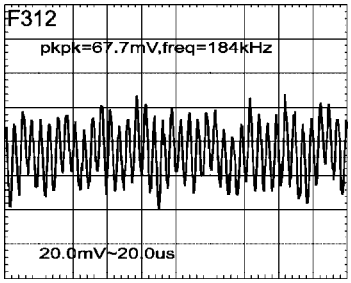

F312

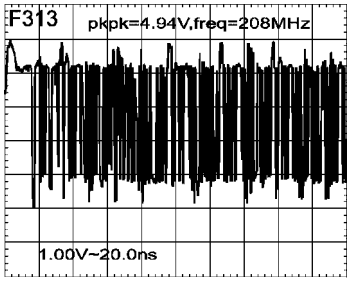

F313

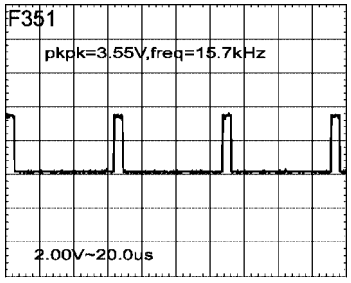

F351

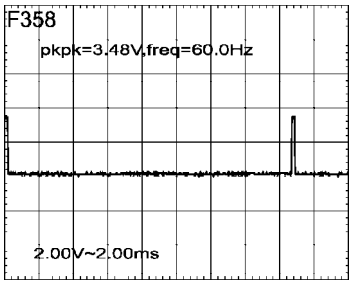

F358

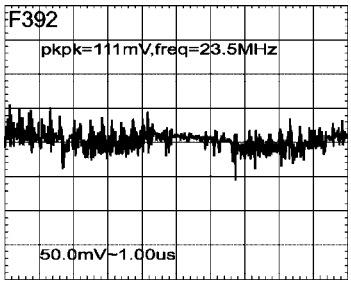

F392

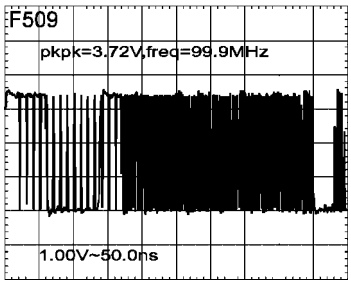

F509

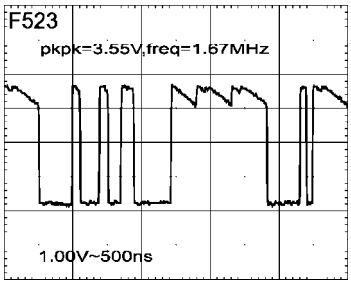

F523

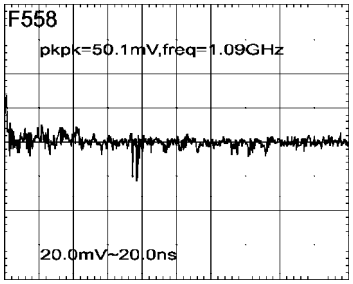

F558

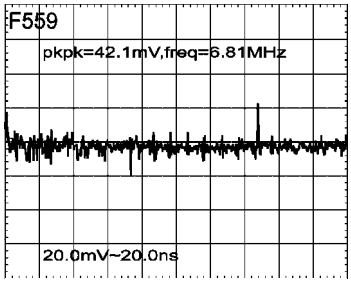

F559

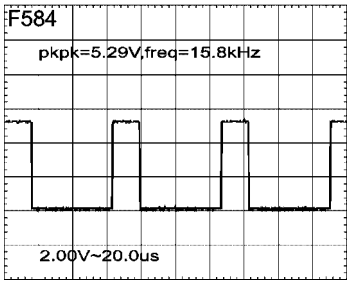

F584

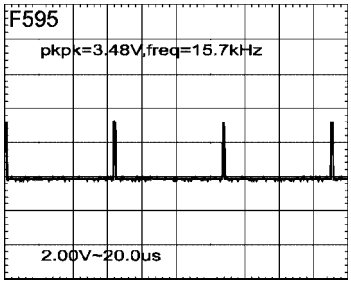

F595

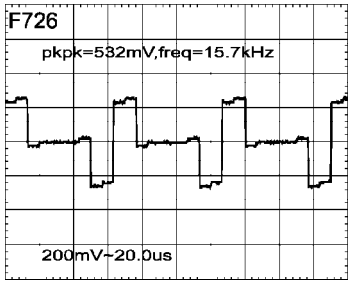

F726

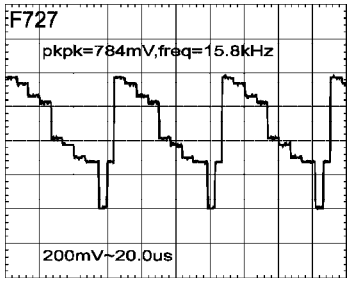

F727

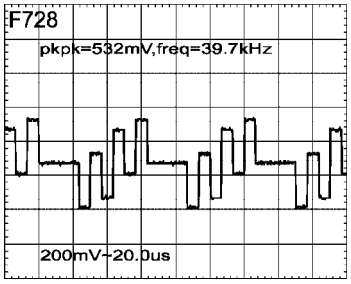

F728

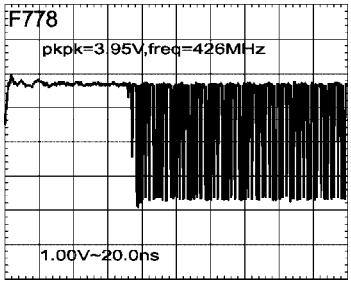

F778

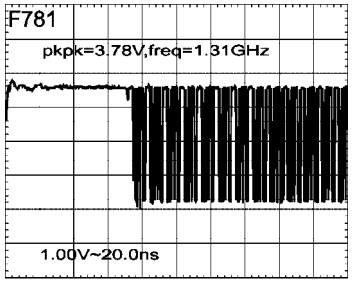

F781

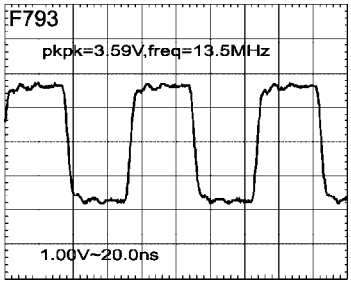

F793

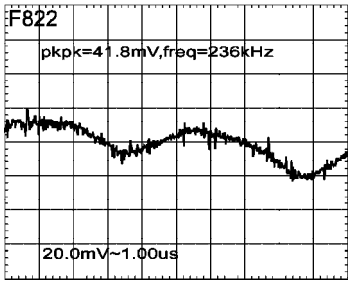

F822

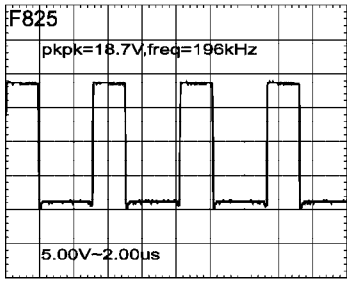

F825



F826

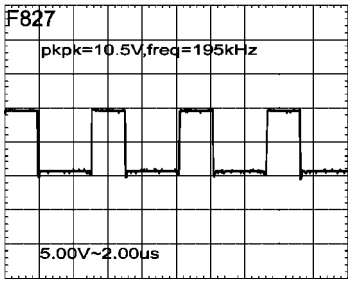

F827

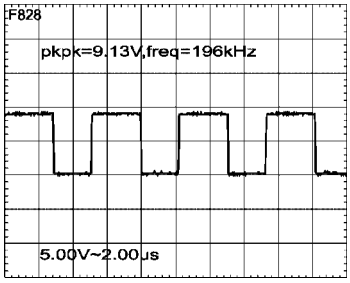

F828



F855



F856



F857



F858



F21



F22



F23



F24



F25



F26



F27

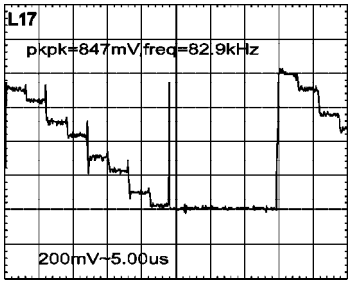

L17

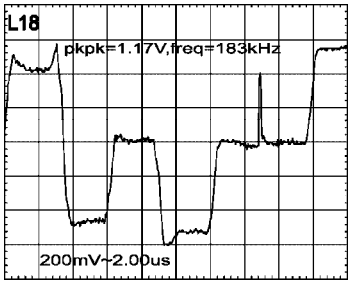

L18



L19



V17A



V18A



F1



F2



F14



F15



F16



F17



F18



V19A



V20A



F 3



F 4



F 5



F 6



F 7



F 8



F 9



F10



F11



F12



F13

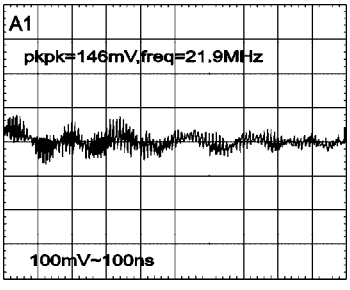

A1

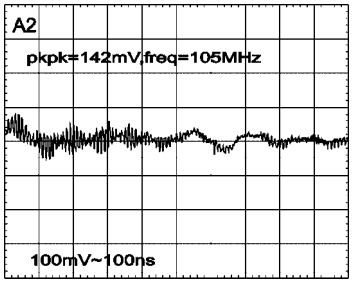

A2



A3



A4



A5



A6



A7

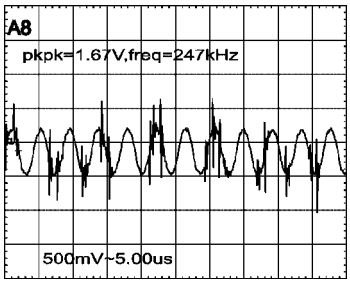

A8

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

MECHANICAL DIAGRAMS

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation

Visit our World Wide Web Site at http://www.forceonline.com

TYPICAL LCoS 44", 55", & 62" EXPLODED VIEW



Item 1085
Remote Control



Item 0168
Owner's Manual



Item 0167
Quick Use
Guide

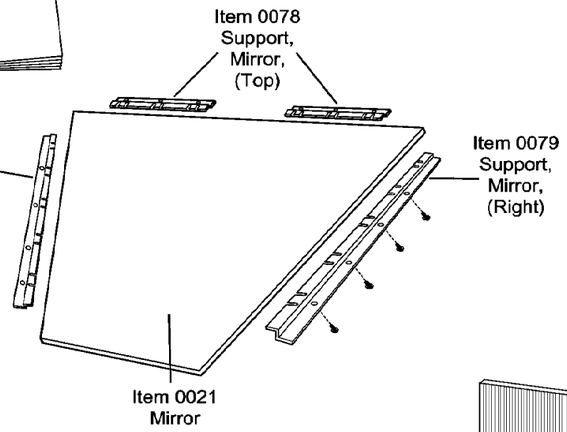

Item 0078
Support,
Mirror,
(Top)

Item 0080
Support,
Mirror,
(Left)

Item 0079
Support,
Mirror,
(Right)

Item 0021
Mirror

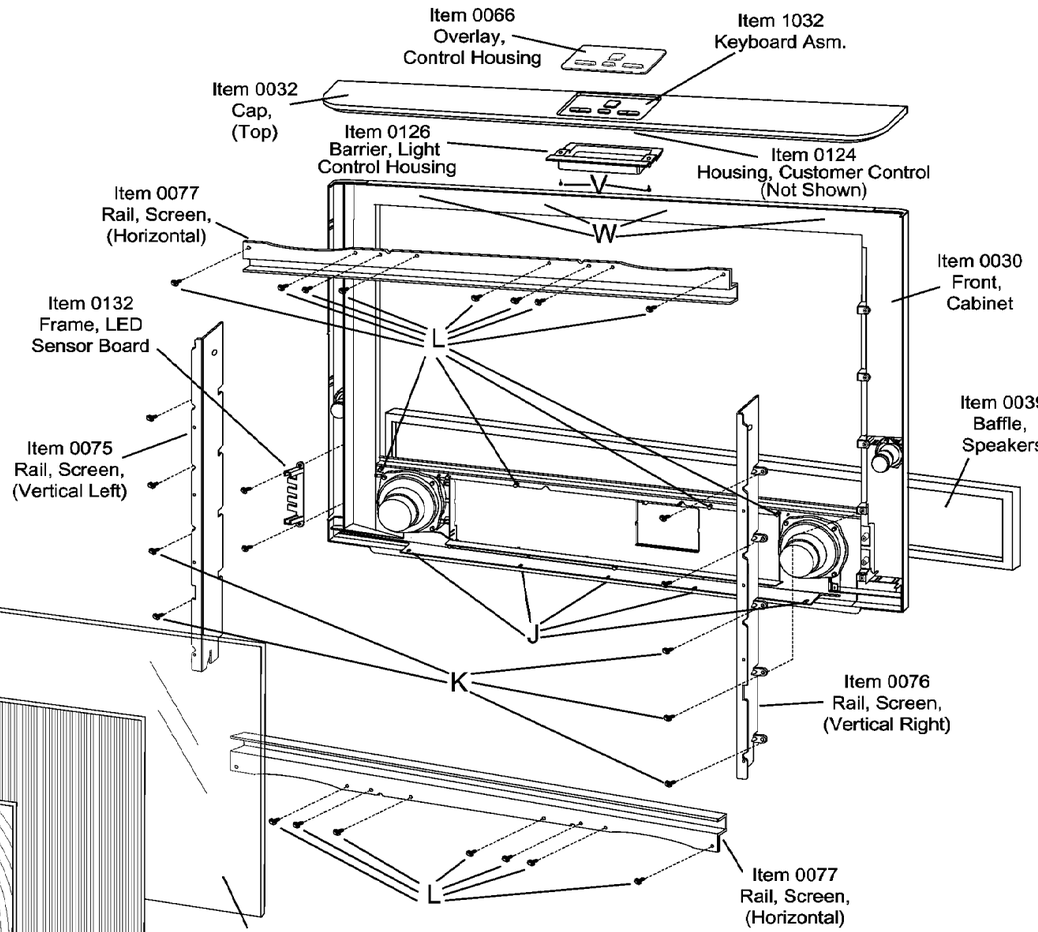

Item 0066
Overlay,
Control Housing

Item 1032
Keyboard Asm.

Item 0032
Cap,
(Top)

Item 0126
Barrier, Light
Control Housing

Item 0124
Housing, Customer Control
(Not Shown)

V

W

Item 0077
Rail, Screen,
(Horizontal)

Item 0030
Front,
Cabinet

Item 0132
Frame, LED
Sensor Board

L

Item 0039
Baffle,
Speakers

Item 0075
Rail, Screen,
(Vertical Left)

J

K

Item 0076
Rail, Screen,
(Vertical Right)

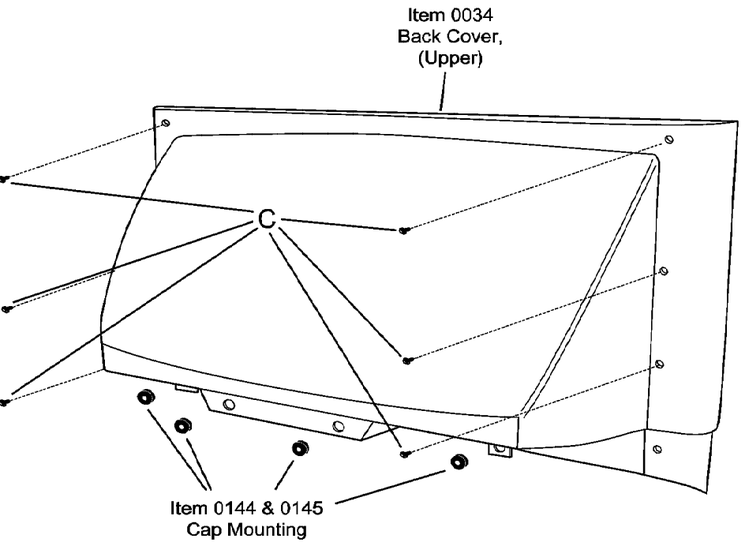

Item 0034
Back Cover,
(Upper)

C

Item 0144 & 0145
Cap Mounting

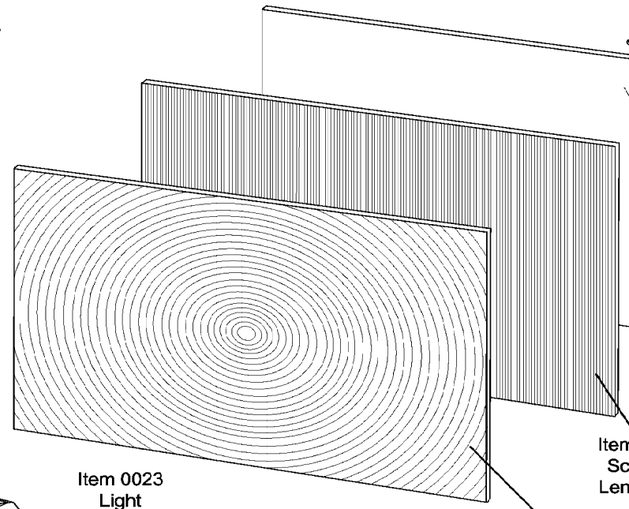

Item 0022
Screen,
Protector

Item 0019
Screen,
Lenticular

Item 0020
Lens,
Fresnel

Item 0077
Rail, Screen,
(Horizontal)



Item 0150
Fan Assembly

D

Item 0005
Fan

X



Item 0023
Light
Shield



Item 0093
Support,
Back

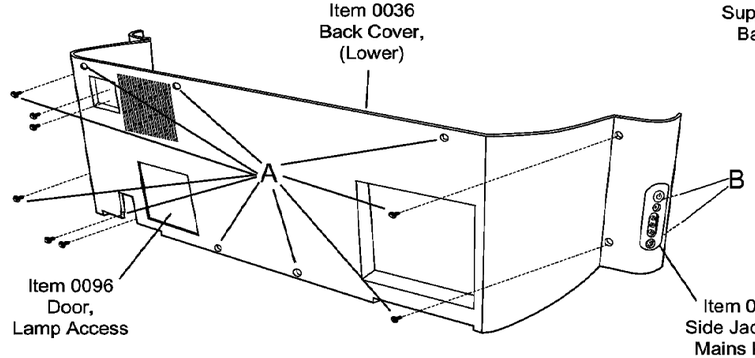

Item 0036
Back Cover,
(Lower)

A

B

Item 0096
Door,
Lamp Access

Item 0127
Side Jacks for
Mains Knob

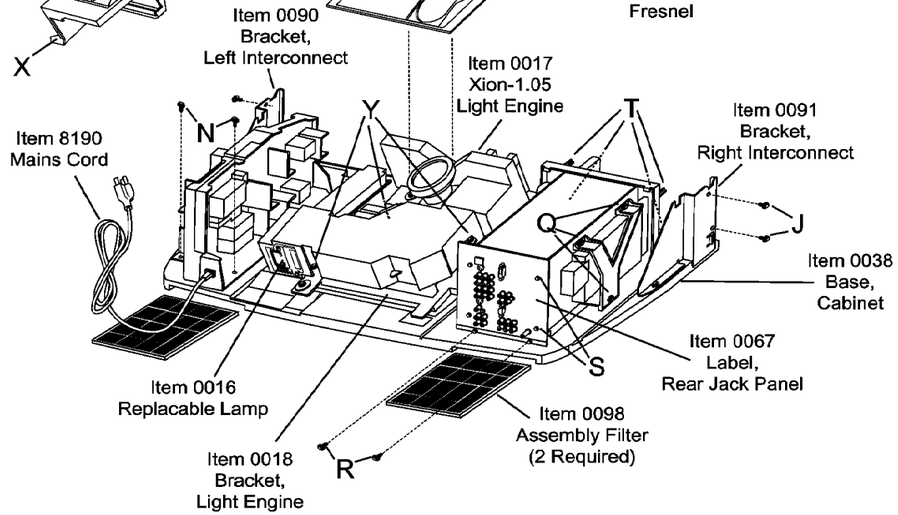

Item 0090
Bracket,
Left Interconnect

Item 0017
Xion-1.05
Light Engine

N

Y

T

Item 0091
Bracket,
Right Interconnect

J

Q

Item 0038
Base,
Cabinet

Item 8190
Mains Cord

Item 0016
Replacable Lamp

S

Item 0067
Label,
Rear Jack Panel

Item 0098
Assembly Filter
(2 Required)

R

Item 0018
Bracket,
Light Engine

LCOS 2003

Cabinet 1 - Exploded View

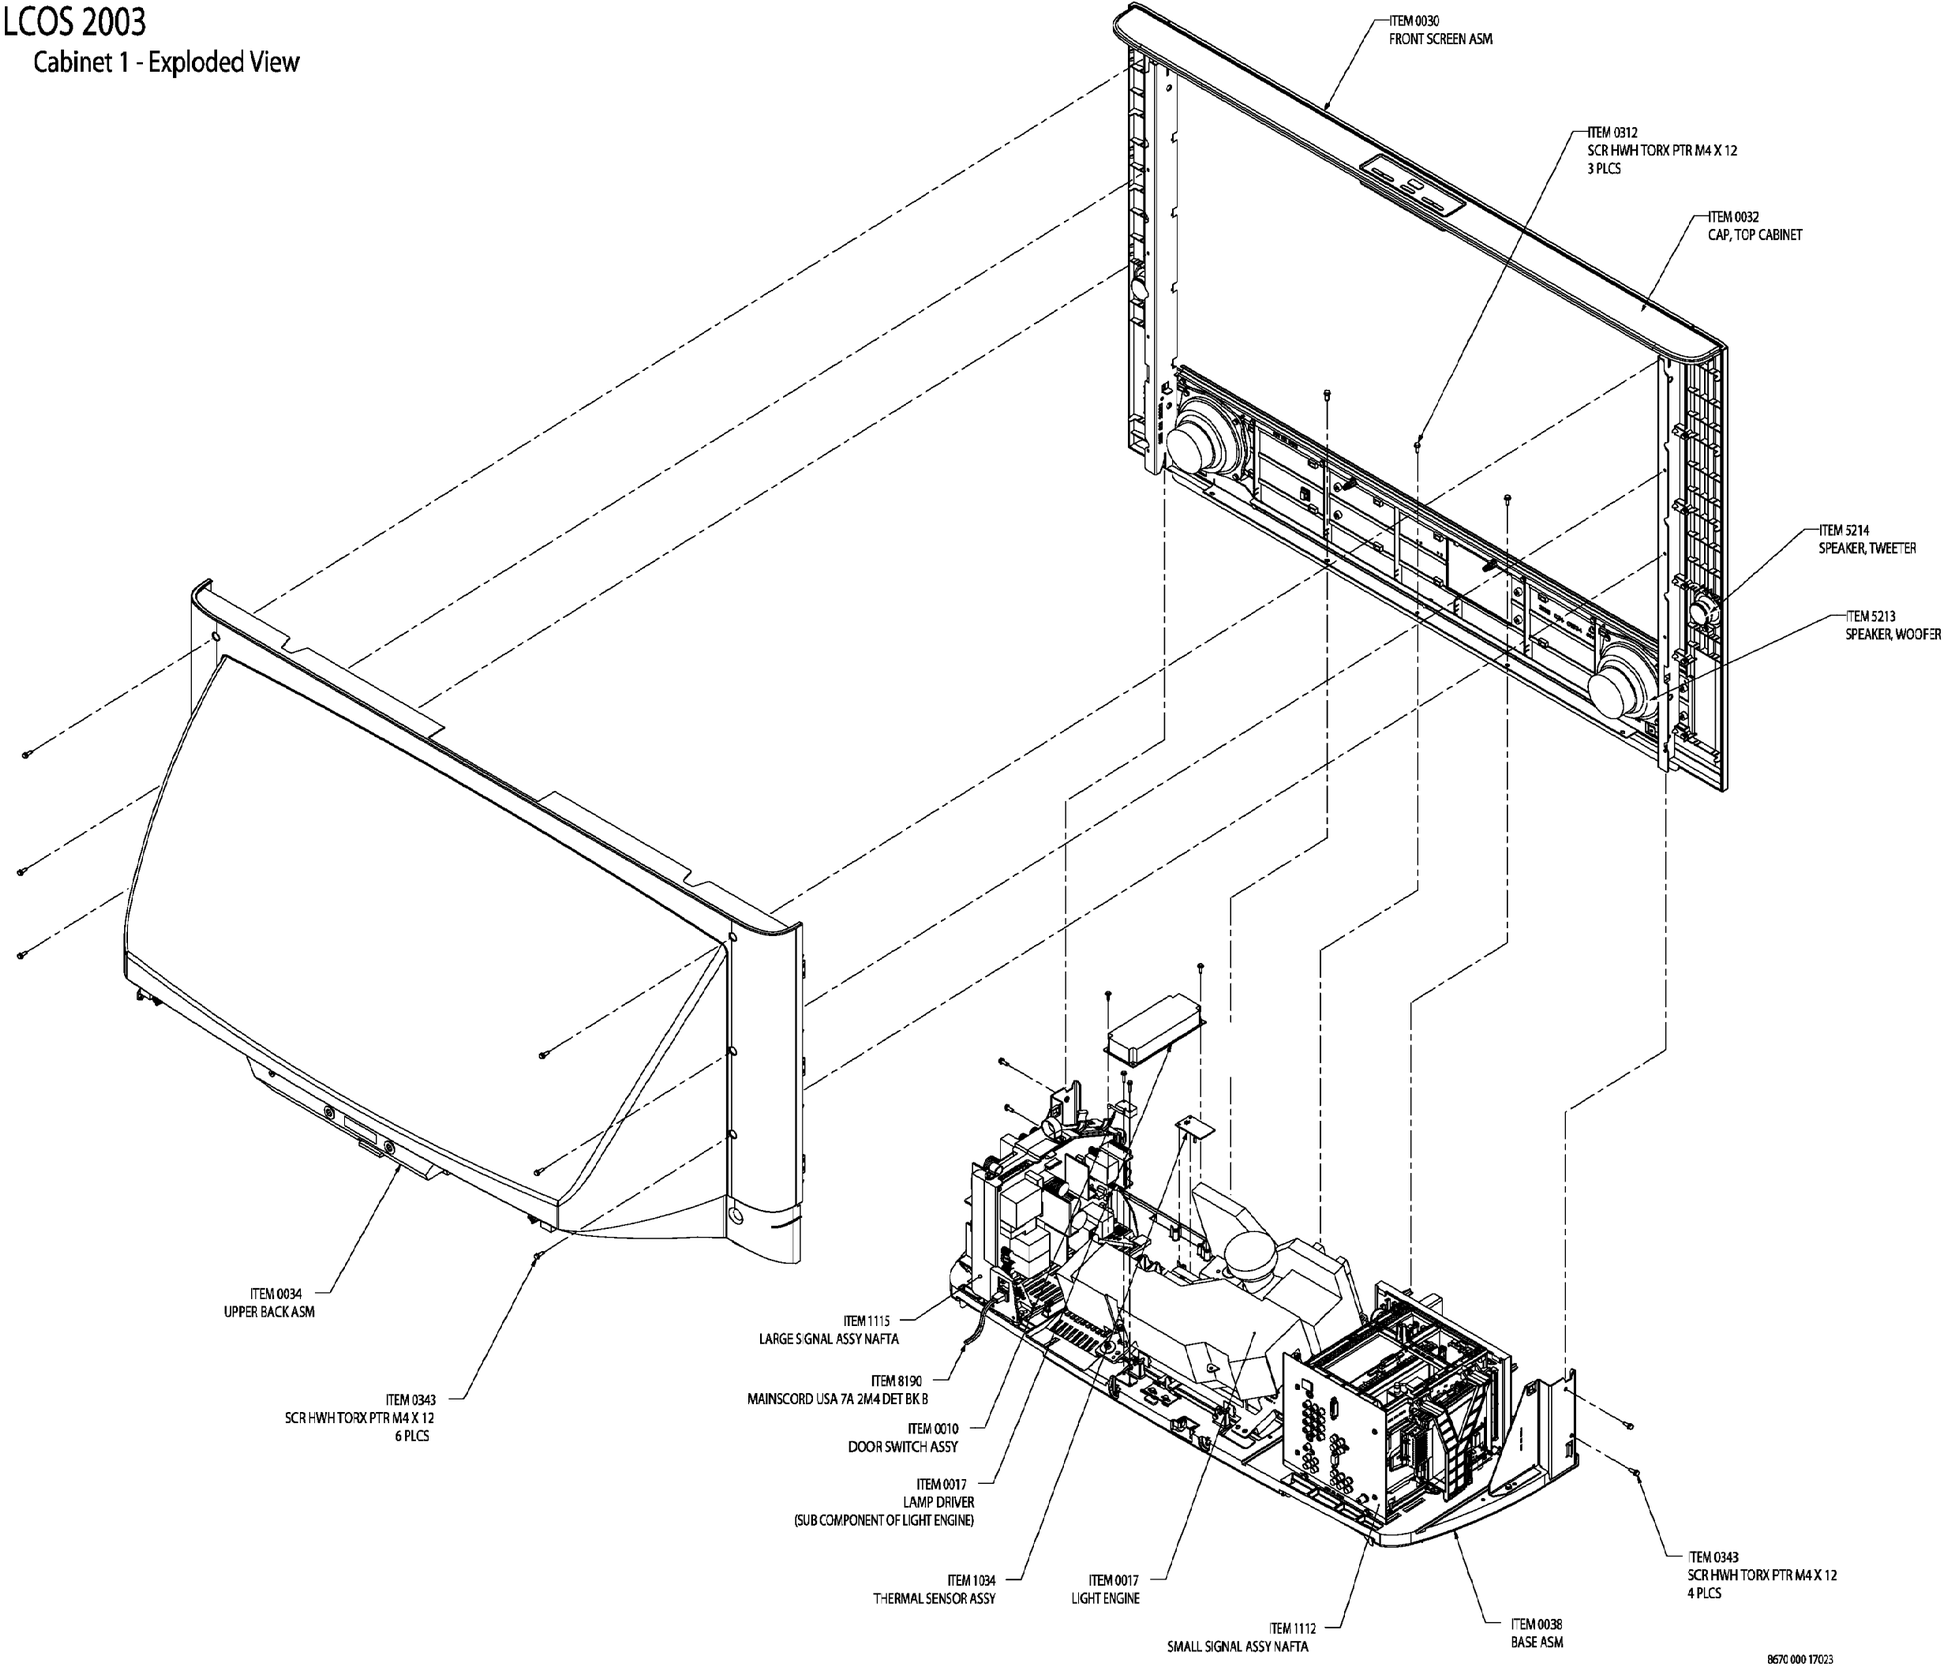

8670 000 17023

LCOS 2003

Cabinet 2 - Exploded View

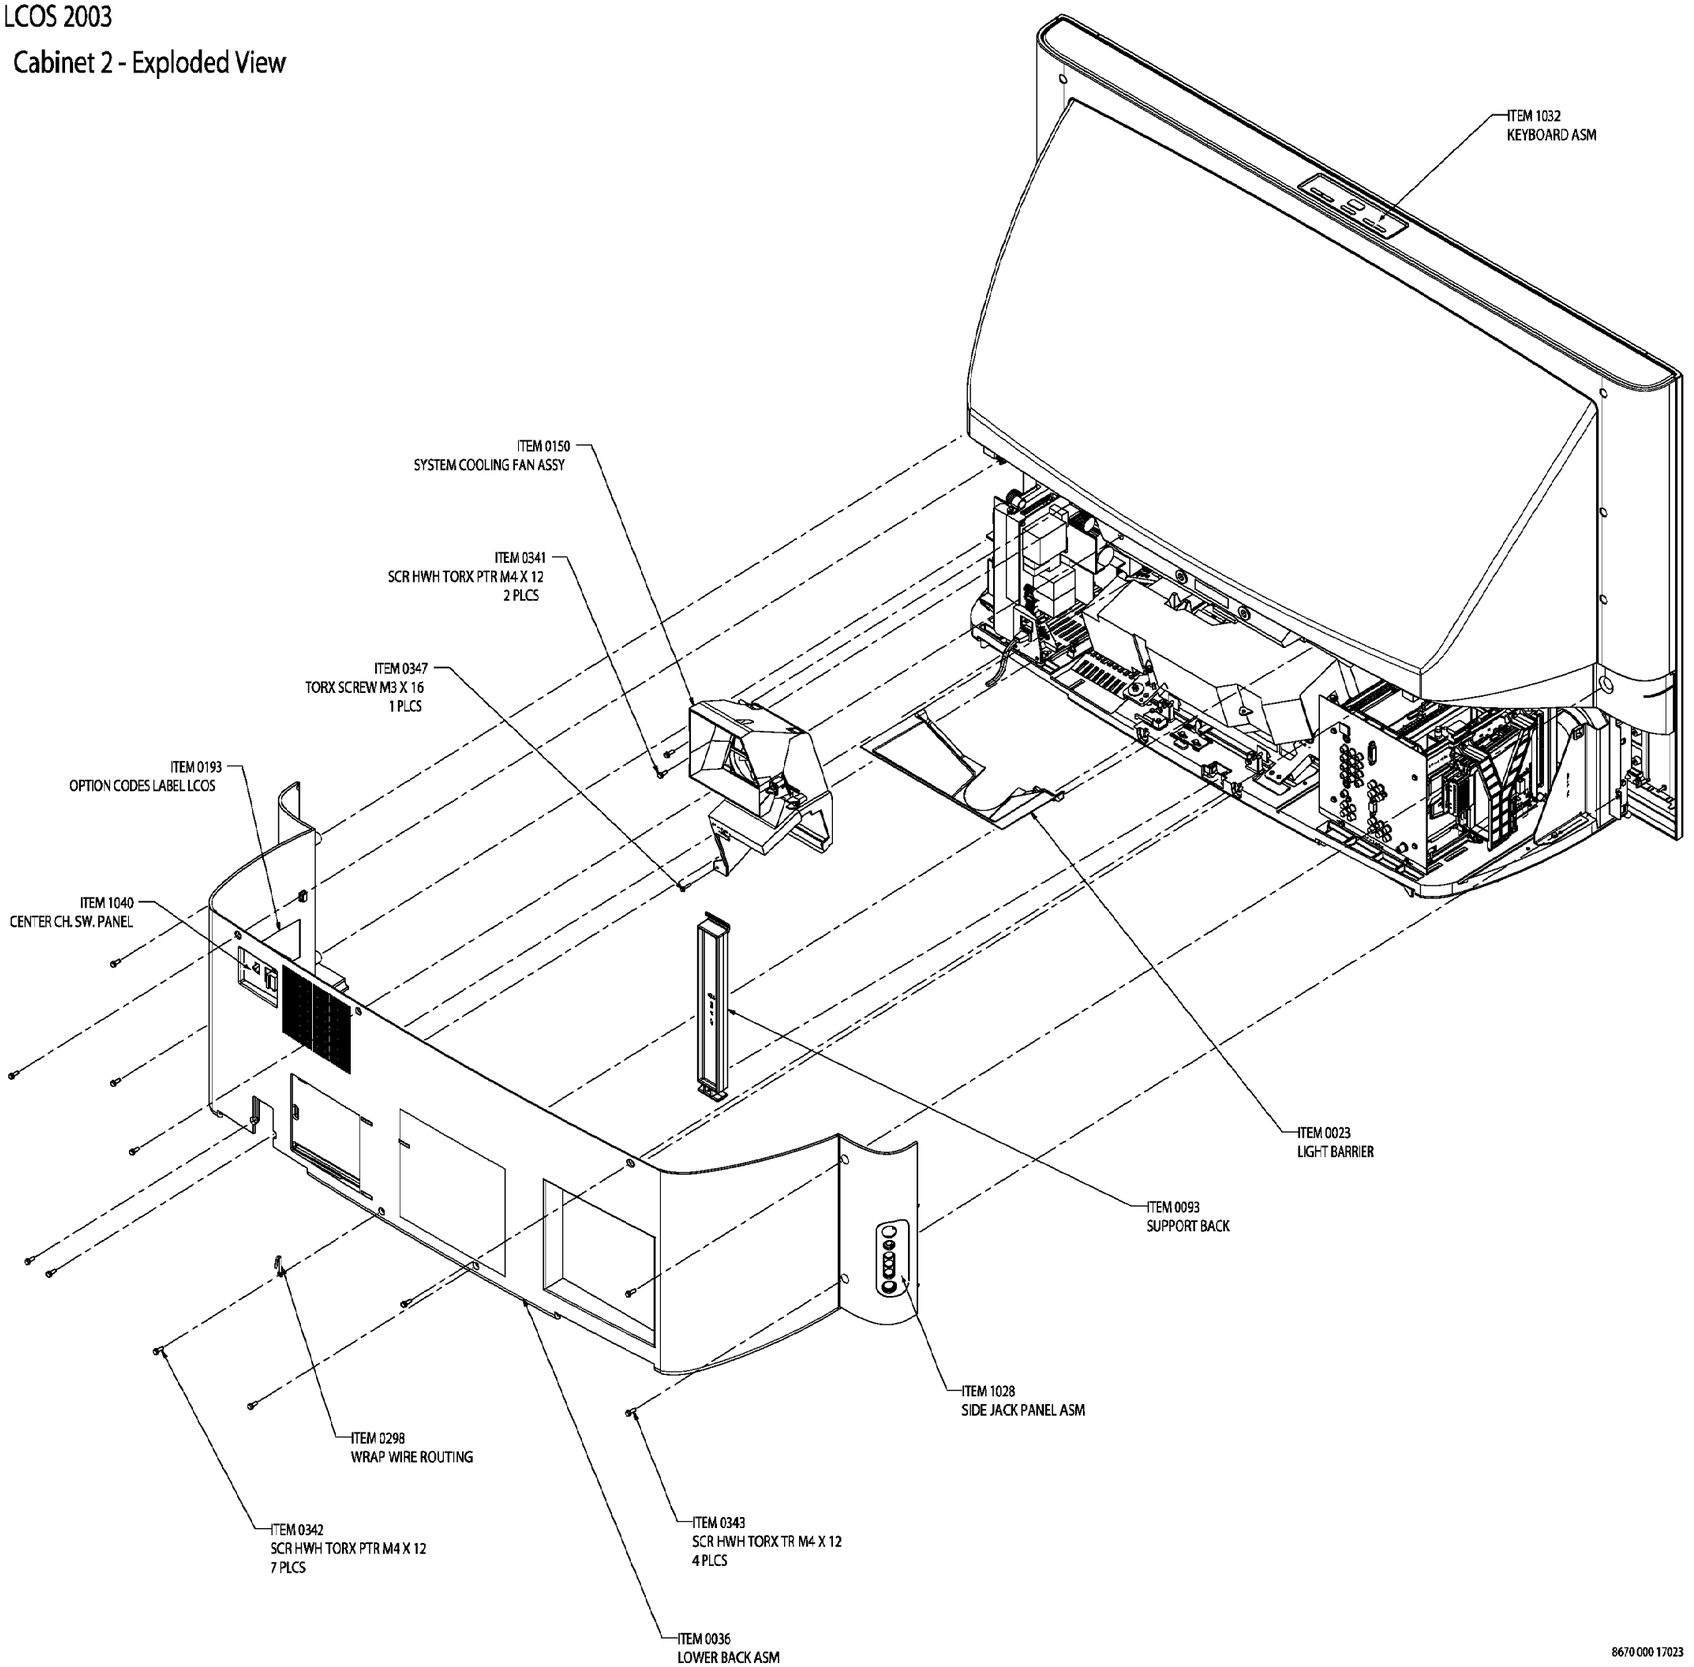

8670 000 17023

TYPICAL LCoS POWER ASSEMBLY
EXPLODED VIEW

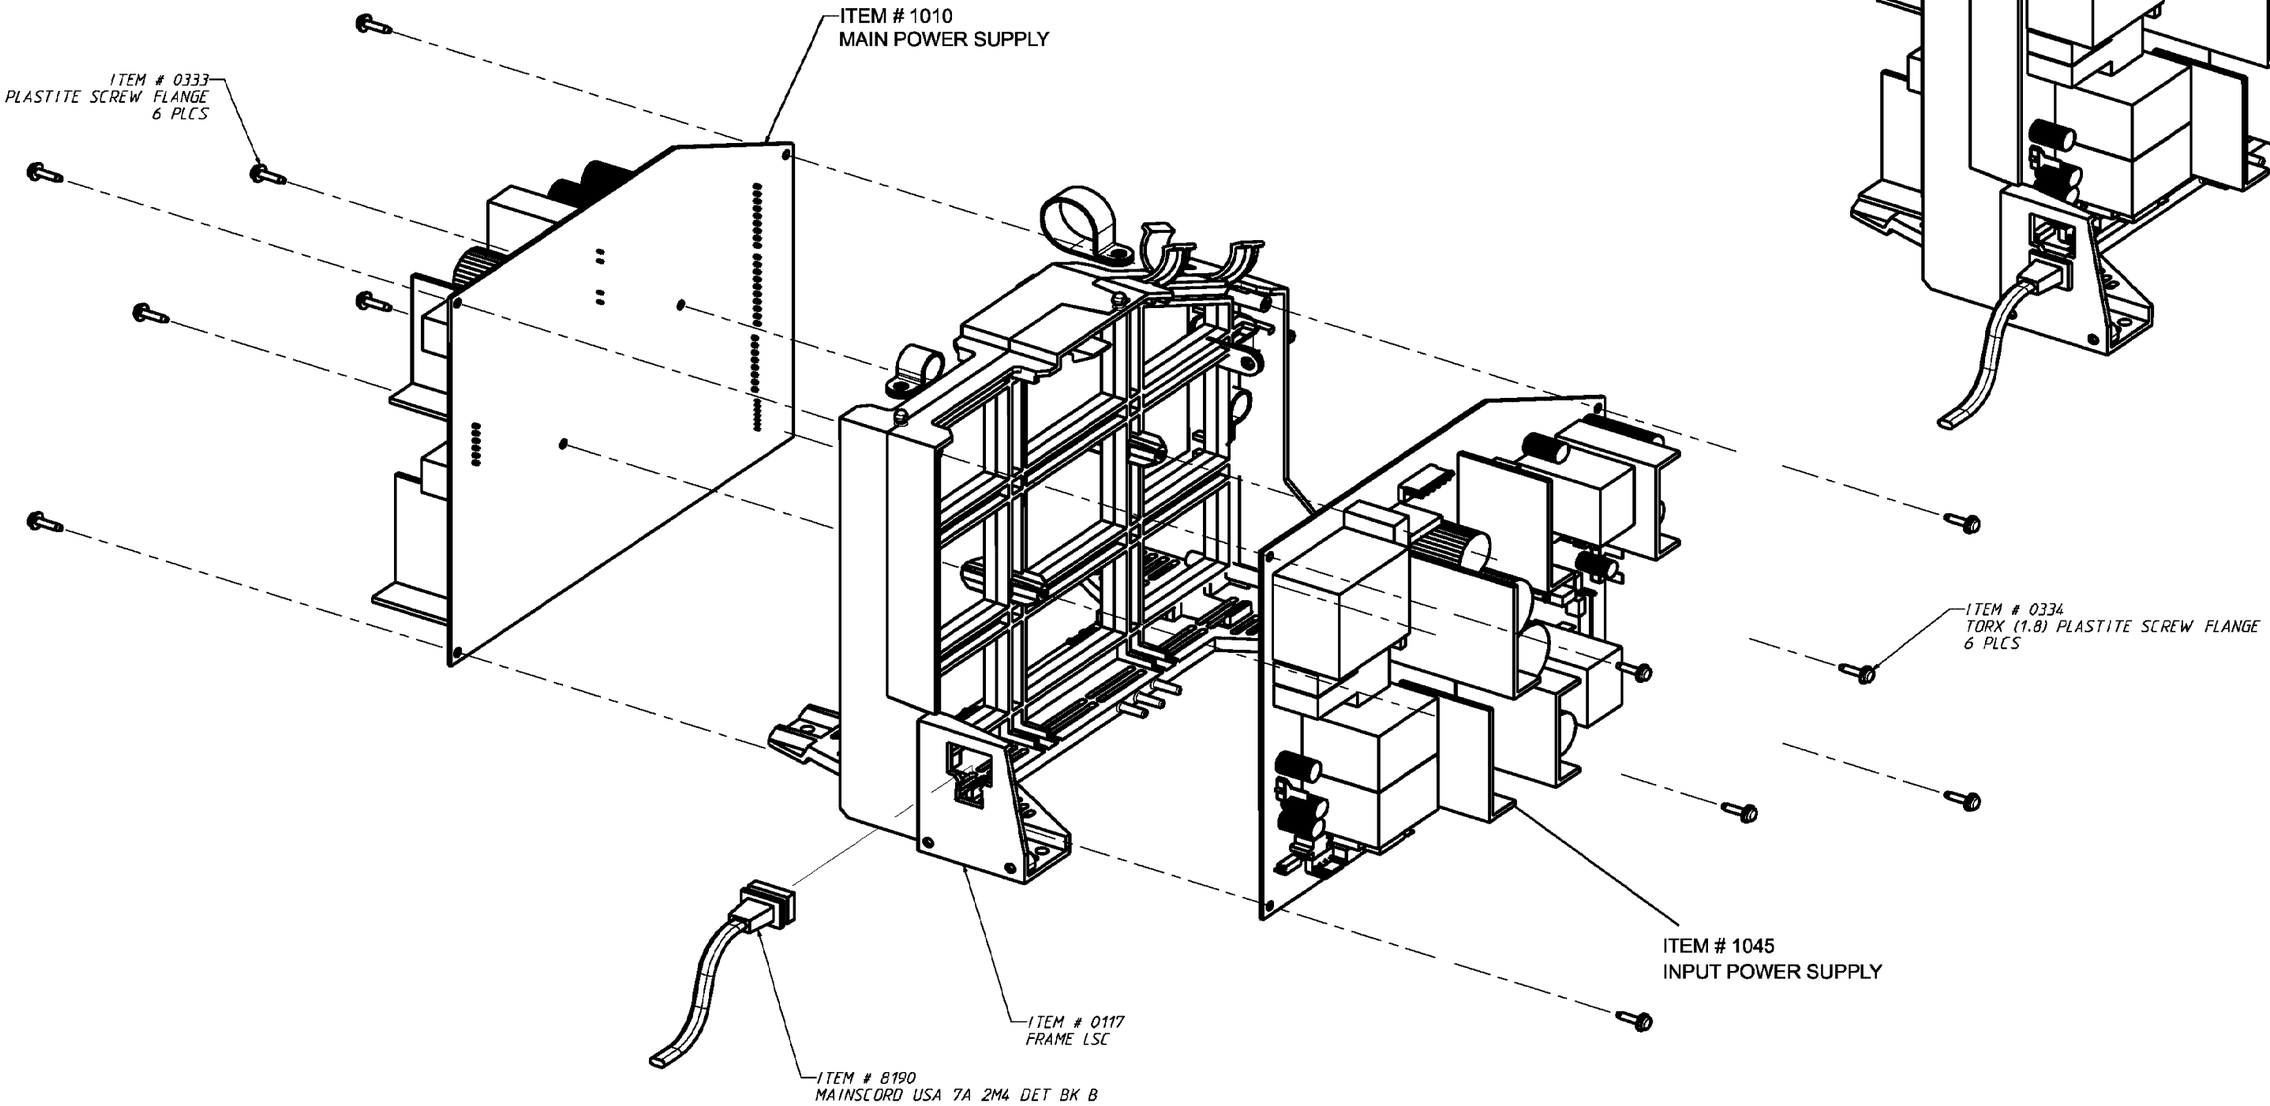

TYPICAL LCoS SIGNAL ASSEMBLY EXPLODED VIEW

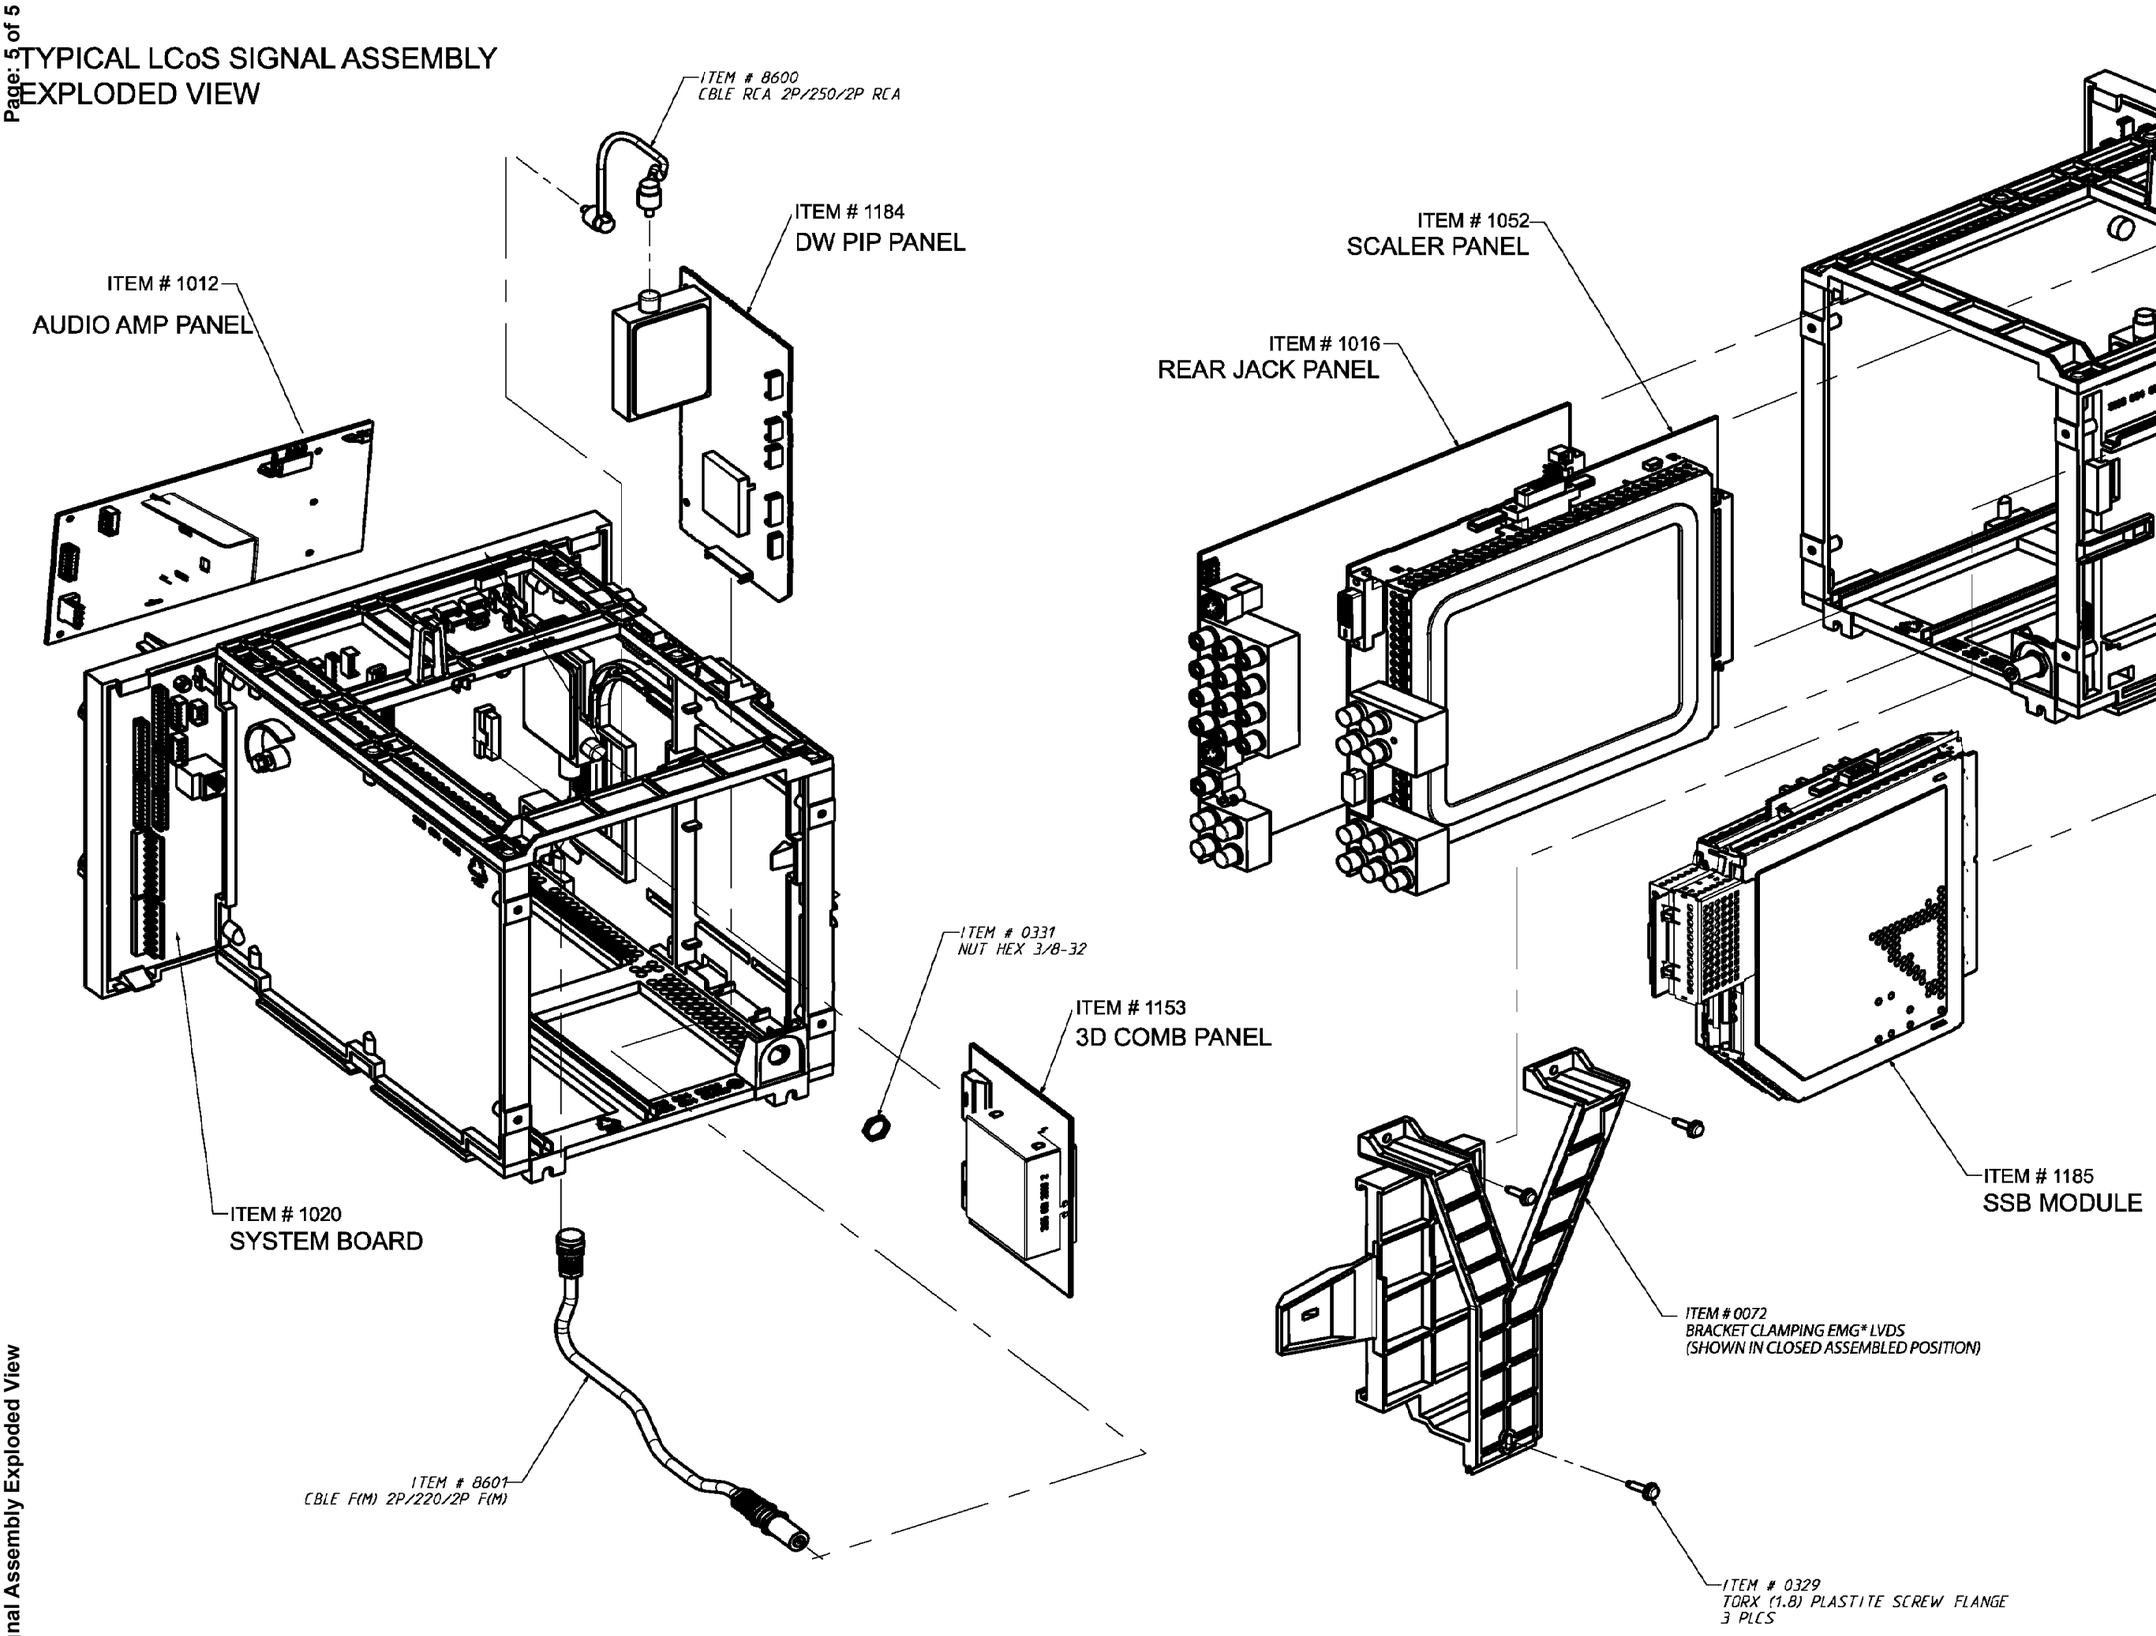

Signal Assembly Exploded View

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-09-2004
Rev. Date: 08-09-2004
Print Date: 2004-08-09

Return to Index

PARTS LIST

44PL9522/17, 44PL9523/17, 44PL9523/99

Lamp Driver Panel Parts
Center Ch. Sw. Panel Parts
3D Comb Filter Panel Parts
Main Power Panel Parts
Rear Jack Panel Parts
System Panel Parts
LED Sensor Panel Parts
Side Jack Panel Parts
LED/Keyboard Panel Parts
Thermal Sensor Panel Parts
Input Power Panel Parts
Audio Amp Panel Parts
DW PIP Panel Parts
SSB Panel Parts
Scaler Board MSB Panel Parts
Cabinet & Accessory Parts

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LAMP DRIVER PANEL

	LAMP DRIVER PANEL	
	LAMP DRIVER PANEL.	9137 001 77405

Center Ch. Sw. Panel Parts

	Center Ch. Sw. Panel Parts	
1040	Center Ch. Sw. Panel Asm..	3135 017 05541
1000	Socket, Click, 2 Pin	2422 015 19072
1002	Switch, Slide, 4 Pin, 2 Positioin, 6A. .	2422 127 00485
1321	Connector.	2422 025 15781
1449	Connector.	2422 025 15779

3D Comb Filter Panel Parts

	3D Comb Filter Panel Parts	
1153	3D Comb Panel Asm.	3135 037 10261
0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHz	2422 543 01273
1008	Connector, 9 Pin	2422 025 17802
1009	Connector, 9 Pin	2422 025 17802
2000	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16v, Electrolytic. . . .	3198 030 41010
2005	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass . .	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass . .	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3103	PTC, 6V, 1R3	2122 662 00139
3104	PTC, 6V, 1R3	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5003	Filter, Fixed, 14M3.	2422 549 44784
5004	Filter, Fixed, 14M3.	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	Filter, Fixed, 14M3.	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070

5027	Inductor, Fixed, 100Mhz, 120 ohm	3198 018	90070
5028	Inductor, Fixed, 100Mhz, 120 ohm	3198 018	90070
5029	Inductor, Fixed, 100Mhz, 120 ohm	3198 018	90070
5030	Inductor, Fixed, 100Mhz, 120 ohm	3198 018	90070
6000	Diode, Signal, BAV99	3198 010	10620
6001	Diode, Signal, BAV99	3198 010	10620
6002	Diode, Signal, BAV99	3198 010	10620
6003	LED, VS, TLMH3100.	9322 072	71685
6004	Diode, Rect, S1D.	9322 128	69685
6005	Diode, Rect, S1D.	9322 128	69685
6006	Diode, Signal, 1PS76SB10	9340 453	90115
6007	Diode, Signal, BAS17	9335 262	30215
7000	Transistor, NPN, BC847B.	9335 895	90215
7001	Transistor, PNP, BC857B.	9335 897	60215
7002	Transistor, NPN, BF570	9338 144	20215
7003	Transistor, PNP, BC857B.	9335 897	60215
7004	Transistor, NPN, BC847B.	9335 895	90215
7005	Transistor, PNP, BC857B.	9335 897	60215
7006	Transistor, NPN, BF570	9338 144	20215
7007	Transistor, PNP, BC857B.	9335 897	60215
7008	Transistor, NPN, BC847B.	9335 895	90215
7009	Transistor, PNP, BC857B.	9335 897	60215
7010	Transistor, NPN, BC847B.	9335 895	90215
7011	Transistor, NPN, BC847B.	9335 895	90215
7012	Transistor, PNP, BF550	9334 509	00215
7015	Transistor, NPN, BC847B.	9335 895	90215
7016	Transistor, PNP, BC857B.	9335 897	60215
7017	Transistor, NPN, BC847B.	9335 895	90215
7019	IC, LM809M3-3.08	9322 163	48668
7020	Transistor, NPN, BC847B.	9335 895	90215
7021	IC, LD1117DT33	9322 134	45668
7022	IC, LD1117DT25	9322 160	50668
7023	IC, UPD64083GF	9322 170	65671

Main Power Panel Parts

Main Power Panel Parts

0218	Insulator, SP900, 19.0x27.9x0.23	3135 010	02331
0219	Clip, Transistor	3135 011	02681
0220	Spring Clip.	3139 121	24583
0221	Spring Clip.	3139 121	24583
0300	Insulator, SP900, 19.0x27.9x0.23	3135 010	02331
0301	Clip, Transistor	3135 011	02681
0302	Spring Clip.	3139 121	24583
0305	Spring Clip.	3139 121	24583
0306	Spring Clip.	3139 121	24583
1206	Connector, 1 Pin	2422 015	18552
1218	Heatsink	3135 031	60071
1219	Heatsink, Dual TO-220.	3135 031	60133
1300	Heatsink	3135 031	60071
1302	Heatsink, Dual TO-220.	3135 031	60133
1305	Heatsink, Dual TO-220.	3135 031	60133
1311	Connector, 6 Pin, BM, V, M	2422 025	14044
1312	Connector, 7 Pin	2422 025	11244
1313	Connector, 8 Pin, BM, V, M	2422 025	10648
1314	Connector, 9 Pin, BM, V, M	2422 025	12827
1315	Connector, 10 Pin, BM, V, M.	2422 025	15085
2220	Cap, 100u, 20%, 400V, Electrolytic	2020 021	91759
S 2221	Cap, 470p, 10%, 250V, Ceramic.	2020 554	90169
2222	Cap, 1n, 10%, 1KV, Ceramic	2020 558	90557
2223	Cap, 470p, 5%, 50V, Ceramic.	3198 016	04710
2226	Cap, 1n, 10%, 1KV, Ceramic	2020 558	90557
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
2233	Cap, 330p, 10%, 1KV, Ceramic	3198 019	63310
2235	Cap, 1n, 10%, 1KV, Ceramic	3198 019	51020
2236	Cap, 470p, 10%, 1KV, Ceramic	3198 019	64710
2237	Cap, 470p, 10%, 1KV, Ceramic	3198 019	54710
2238	Cap, 3300u, 20%, 16V, Electrolytic	2020 021	91816
2239	Cap, 1000u, 20%, 16V, Electrolytic	2020 021	91803
2240	Cap, 1000u, 20%, 16V, Electrolytic	2020 021	91803
2241	Cap, 10u, 20%, 50V, Electrolytic	2020 021	91808
2243	Cap, 100n, 10%, 50V, Polyester	3198 014	01040
2244	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
2245	Cap, 47u, 20%, 16V, Electrolytic	2020 021	91804
2246	Cap, 1u, 20%, 100V, Electrolytic	2020 021	91812
2247	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
2265	Cap, 1u, 20%, 100V, Electrolytic	2020 021	91812
2310	Cap, 1n, 10%, 1KV, Ceramic	2020 558	90557
2312	Cap, 1n, 10%, 1KV, Ceramic	2020 558	90557
2320	Cap, 100u, 20%, 400V, Electrolytic	2020 021	91759
S 2321	Cap, 470p, 10%, 250V, Ceramic.	2020 554	90169
2323	Cap, 470p, 5%, 50V, Ceramic.	3198 016	04710
2333	Cap, 470p, 10%, 1KV, Ceramic	3198 019	64710
2335	Cap, 100p, 10%, 1KV, Ceramic	3198 019	51010
2336	Cap, 4n7, 10%, 400V, Metalized Polyester	2222 365	55472
2337	Cap, 470p, 10%, 1KV, Ceramic	3198 019	54710
2338	Cap, 1000u, 20%, 25V, Electrolytic	2020 021	91805
2339	Cap, 100n, 10%, 50V, Polyester	3198 014	01040
2340	Cap, 10n, 10%, 50V, Ceramic.	3198 017	01030
2341	Cap, 10u, 20%, 50V, Electrolytic	2020 021	91808
2342	Cap, 100n, 10%, 50V, Polyester	3198 014	01040
2343	Cap, 47u, 20%, 16V, Electrolytic	2020 021	91804
2344	Cap, 47u, 20%, 16V, Electrolytic	2020 021	91804
2345	Cap, 10n, 10%, 50V, Ceramic.	3198 017	01030
2346	Cap, 100n, 10%, 50V, Polyester	3198 014	01040
2347	Cap, 470p, 5%, 50V, Ceramic.	3198 016	04710
2348	Cap, 1n, 10%, 50V, Ceramic	3198 019	11020
2349	Cap, 1000u, 20%, 10V, Electrolytic	2020 021	91814
2350	Cap, 4n7, 10%, 50V, Ceramic.	3198 019	14720
2351	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019	22230
2352	Cap, 1000u, 20%, 10V, Electrolytic	2020 021	91814
2353	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
2354	Cap, 22u, 20%, 100V, Electrolytic.	2020 021	91813
2355	Cap, 1u, 20%, 100V, Electrolytic	2020 021	91812
2356	Cap, 100p, 10%, 500V, Ceramic.	3198 019	41010
2357	Cap, 1500u, 20%, 25V, Electrolytic	2020 021	91806
2358	Cap, 1000u, 20%, 25V, Electrolytic	2020 021	91805
2360	Cap, 1500u, 20%, 25V, Electrolytic	2020 021	91806
2361	Cap, 1000u, 20%, 25V, Electrolytic	2020 021	91805
2362	Cap, 470p, 10%, 1KV, Ceramic	3198 019	54710
2363	Cap, 470u, 20%, 50V, Electrolytic.	2020 021	91809
2364	Cap, 470u, 20%, 50V, Electrolytic.	2020 021	91809
2365	Cap, 1u, 20%, 100V, Electrolytic	2020 021	91812
2366	Cap, 1000u, 20%, 10V, Electrolytic	2020 021	91814
2367	Cap, 22u, 20%, 35V, Electrolytic	2020 021	91811
3221	Res, 33K, 5%, 1W, Metal Film	3198 012	13330
3222	Res, 100 ohm, 5%, 2W, Metal Film	2120 105	93422
3223	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3224	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3226	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3227	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3228	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3229	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021	54790
3230	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3231	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011	03330
3233	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011	01080
3237	Res, 10K7, 1%, 3/5W, Metal Film.	2312 915	11073
3238	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3252	Res, 22 ohm, 1%, 3/5W, Metal Film.	2312 915	12209
3253	Res, 27K, 1%, 3/5W, Metal Film	2312 915	12703
3254	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734	64702
3255	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011	03330
3256	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3257	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3259	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011	06810
3260	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011	02220
3321	Res, 22K, 5%, 1W, Metal Film	3198 012	12230
3322	Res, 100 ohm, 5%, 2W, Metal Film	2120 105	93422
3323	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3324	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3325	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3326	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021	58220
3327	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3328	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734	62702
3329	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011	01510
3330	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012	22210
3331	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021	52710
3332	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021	55630
3333	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3335	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011	01010
3338	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3339	Res, 1K, 5%, 1 1/3W, Metal Film.	3198 012	21020
3340	Res, 22K, 5%, 1W, Metal Film	3198 012	12230
S 3341	Res, 680 ohm, 5%, 3W, Metal Film	3198 012	36810
3342	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3343	Res, 1K8, 1%, 1/10W, Metalized Glass	2120 108	92618
3344	Res, 750K, 1%, 3/5W, Metal Film.	2312 915	17504
3345	Res, 27K, 1%, 1/8W, Metalized Glass.	2322 734	62703
3346	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3347	Res, 10 ohm, 5%, 1W, Metal Film.	3198 012	11090
3348	Res, 100 ohm, 5%, 2W, Metal Film	2120 105	93422
3349	Res, 0R47, 5%, 3/5W, Metal Film.	3198 012	14770
3350	Res, 8R2, 5%, 1/4W, Carbon Film.	2120 101	74828
3351	Res, 0R1, 5%, 1 1/3W, Metal Film	3198 012	21070
3352	Res, 2K7, 1%, 3/5W, Metal Film	2312 915	12702
3353	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3354	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021	58220
3355	Res, 150K, 5%, 1/6W, Carbon Film	3198 011	01540
3356	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3357	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3358	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3359	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011	01810
S 5201	Line Filter, 100uH, 2.2A	2422 549	44101
5208	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5209	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
S 5210	Switching Transformer, US28207-00.	2422 531	02555
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5213	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5215	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5216	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5217	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020

S = Safety Part Be sure to use exact replacement part.

S	5301	Line Filter, 100uH, 2.2A	2422 549 44101
	5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5307	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5308	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5309	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
S	5310	Switching Transformer, US28212-02.	2422 531 02594
	5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5316	Coil, 10u.	2422 535 94639
	5317	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5320	Coil, 10u.	2422 535 94639
	5321	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5322	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5325	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5326	Coil, 10u.	2422 535 95363
	5327	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5328	Coil, 330u	2422 535 94863
	6201	Diode, Rect, BY229X-800	9340 380 30127
	6202	Zener Diode, 5.1 volt.	3198 010 55180
	6202	Zener Diode, 5.1 volt.	3198 010 55180
	6204	Diode, Rect., PBYR10100X.	9340 555 24127
	6205	Diode, Rect, BYV95C	9335 001 80133
S	6207	IC, Optocoupler.	9338 941 50682
	6209	Diode, Signal, BAV21	3198 010 10070
	6301	Diode, Rect, BY229X-800	9340 380 30127
	6305	Diode, Rect, BYV95C	9335 001 80133
	6306	Diode, Signal, BAV21	3198 010 10070
S	6307	IC, Optocoupler.	9338 941 50682
	6308	Zener Diode, 5.1 volt.	3198 010 55180
	6309	Diode, Signal, BAV21	3198 010 10070
	6312	Diode, Rect, SB360L-7024	9322 161 78682
	6313	Diode, Rect, BYV95C	9335 001 80133
	6314	Diode, Rect, BYW29EX-200.	9340 412 80127
	6315	Diode, Rect., PBYR10100X.	9340 555 24127
	6316	Diode, Rect, BYW95C-24.	9340 559 53112
	7202	IC, PWM Off-line Switcher.	9322 166 44687
	7203	Transistor, N Ch. FET, 2SK2886	9322 199 01687
	7206	IC, Prog. Ref. Regulator	9322 115 98676
	7209	IC, Prog. Ref. Regulator	9322 115 98676
	7210	Transistor, PNP, BC557B.	3198 020 40110
	7211	Transistor, NPN, BC547B.	3198 020 40030
	7302	IC, PWM Off-line Switcher, TOP247Y	9322 181 88687
	7303	Transistor, N Ch. FET, 2SK2886	9322 199 01687
	7304	IC, Prog. Ref. Regulator	9322 115 98676
	7306	IC, Prog. Ref. Regulator	9322 115 98676
	7307	IC, Inverting Step Switch Reg., MC34063A	9322 036 71682
	7308	Transistor, P Ch. FET, 2SJ334.	9322 199 02687
	7309	IC, Prog. Ref. Regulator	9322 115 98676
	7310	Transistor, PNP, BC557B.	3198 020 40110
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9005	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9013	Wire Jumper, 0.58MM.	3198 036 90010
	9014	Wire Jumper, 0.58MM.	3198 036 90010
	9016	Wire Jumper, 0.58MM.	3198 036 90010
	9017	Wire Jumper, 0.58MM.	3198 036 90010
	9018	Wire Jumper, 0.58MM.	3198 036 90010
	9019	Wire Jumper, 0.58MM.	3198 036 90010
	9020	Wire Jumper, 0.58MM.	3198 036 90010
	9024	Wire Jumper, 0.58MM.	3198 036 90010
	9025	Wire Jumper, 0.58MM.	3198 036 90010
	9026	Wire Jumper, 0.58MM.	3198 036 90010
	9028	Wire Jumper, 0.58MM.	3198 036 90010
	9029	Wire Jumper, 0.58MM.	3198 036 90010
	9030	Wire Jumper, 0.58MM.	3198 036 90010
	9031	Wire Jumper, 0.58MM.	3198 036 90010
	9032	Wire Jumper, 0.58MM.	3198 036 90010
	9033	Wire Jumper, 0.58MM.	3198 036 90010
	9317	Wire Jumper, 0.58MM.	3198 036 90010
	9318	Wire Jumper, 0.58MM.	3198 036 90010
	1010	Main Power Supply Panel Asm.	3135 037 10663

Rear Jack Panel Parts

Rear Jack Panel Parts

	1016	Rear Jack Panel Asm.	3135 037 10692
	1200	Connector, 4 Pin	2422 025 12479
	1201	Connector, 4 Pin	2422 025 12479
	1202	Connector, 4 Pin	2422 025 12479
	1203	Connector, 4 Pin	2422 025 12479
	1205	Connector, 3 Pin	2422 025 09191
	1207	Connector, 5 Pin	2422 025 12481
	1208	Connector, 5 Pin	2422 025 12481
	1214	Socket, Cinch, 4 Pin	2422 026 05093
	1217	Socket, Cinch, 1 Pin	2422 026 04378
	1218	Socket, MDIN, 10 Pin	2422 026 04926
	1219	Socket, MDIN, 10 Pin	2422 026 04926
	1220	Connector, 64 Pin.	2422 025 17714
	1251	Socket, Cinch, 12 Pin.	2422 026 05106
	2111	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2112	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2113	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2114	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2115	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2116	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2117	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2118	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2119	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2120	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
	2121	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2122	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2123	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2124	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2149	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2150	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2151	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2152	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2153	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2154	Cap, 100n, +80/-20%, 50v, Ceramic.	2020 552 95499
	2155	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2156	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2157	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2158	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2159	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2160	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2161	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2162	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2163	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2164	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2165	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2166	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2167	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2168	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2169	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2170	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2171	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2173	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2174	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2175	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2176	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2177	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2178	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2180	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2182	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2183	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2184	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2185	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2186	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2187	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2188	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2189	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	3117	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3118	Res, 30K, 1%, 1/8W, Metalized Glass.	2322 734 63003
	3119	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3120	Res, 51K, 1%, 1/8W, Metalized Glass.	2322 734 65103
	3121	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3122	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3125	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3128	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3129	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3130	Res, 1 ohm, 5%, 1/10W, Metalized Glass	3198 021 51080
	3131	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3133	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3134	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3136	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3137	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3139	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3140	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3141	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3142	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
	3143	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3144	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3145	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3155	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3156	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3157	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3158	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3159	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3160	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3161	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3162	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3173	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3174	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3175	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

3176 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3181 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3182 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3183 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3184 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3185 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3186 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3187 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3188 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3189 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3190 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3191 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3192 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3193 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3220 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3221 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3222 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3223 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3224 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3225 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3226 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3227 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3228 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3229 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3230 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3231 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3232 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3233 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3234 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3235 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3237 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3238 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3243 Res, 68 ohm, 5%, 1/10W, Metalized Glass. 3198 021 56890
3244 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3245 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3246 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3247 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3248 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
4000 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4004 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4005 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4006 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4007 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4008 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4009 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4010 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4011 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4012 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4013 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4014 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4015 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4016 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4017 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4018 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4019 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4020 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4021 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4022 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4023 Res, Zero ohm, "Chip" Jumper 3198 021 90020
6101 Zener Diode, 6.8 volt. 3198 020 56880
6102 Zener Diode, 6.8 volt. 3198 020 56880
6103 Zener Diode, 6.8 volt. 3198 020 56880
6104 Zener Diode, 6.8 volt. 3198 020 56880
6105 Zener Diode, 6.8 volt. 3198 020 56880
6106 Zener Diode, 6.8 volt. 3198 020 56880
6107 Zener Diode, 6.8 volt. 3198 020 56880
6108 Zener Diode, 6.8 volt. 3198 020 56880
6109 Zener Diode, 6.8 volt. 3198 020 56880
6110 Zener Diode, 6.8 volt. 3198 020 56880
6111 Zener Diode, 6.8 volt. 3198 020 56880
6112 Zener Diode, 6.8 volt. 3198 020 56880
6113 Zener Diode, 6.8 volt. 3198 020 56880
6114 Zener Diode, 6.8 volt. 3198 020 56880
6115 Zener Diode, 6.8 volt. 3198 020 56880
6116 Zener Diode, 6.8 volt. 3198 020 56880
6117 Zener Diode, 6.8 volt. 3198 020 56880
6118 Zener Diode, 6.8 volt. 3198 020 56880
6119 Zener Diode, 6.8 volt. 3198 020 56880
6120 Zener Diode, 6.8 volt. 3198 020 56880
6121 Diode, Signal, BAV99 . . . . . 9332 153 70215
6122 Diode, Signal, BAV99 . . . . . 9332 153 70215
6123 Diode, Signal, BAV99 . . . . . 9332 153 70215
6124 Diode, Signal, BAV99 . . . . . 9332 153 70215
6125 Diode, Signal, BAV99 . . . . . 9332 153 70215
6126 Diode, Signal, BAV99 . . . . . 9332 153 70215
6128 Diode, Signal, BAV99 . . . . . 9332 153 70215
6129 Diode, Signal, BAV99 . . . . . 9332 153 70215
6130 Diode, Signal, BAV99 . . . . . 9332 153 70215
6132 Diode, Signal, BAV99 . . . . . 9332 153 70215

6161 Zener Diode, 6.8 volt. 3198 020 56880
6162 Zener Diode, 6.8 volt. 3198 020 56880
7100 IC, CXA2089S 9322 162 27682
7102 Transistor, NPN, BC847B. 3198 010 42030
7105 Transistor, NPN, BC847B. 3198 010 42030
7107 Transistor, NPN, BC847B. 3198 010 42030
7108 Transistor, NPN, BC847B. 3198 010 42030
7109 Transistor, NPN, BC847B. 3198 010 42030
7110 Transistor, NPN, BC847B. 3198 010 42030
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9004 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9006 Wire Jumper, 0.58MM. 3198 036 90010
9007 Wire Jumper, 0.58MM. 3198 036 90010
9008 Wire Jumper, 0.58MM. 3198 036 90010
9009 Wire Jumper, 0.58MM. 3198 036 90010
9010 Wire Jumper, 0.58MM. 3198 036 90010
9100 Wire Jumper, 0.58MM. 3198 036 90010
9101 Wire Jumper, 0.58MM. 3198 036 90010
9102 Wire Jumper, 0.58MM. 3198 036 90010
9103 Wire Jumper, 0.58MM. 3198 036 90010
9104 Wire Jumper, 0.58MM. 3198 036 90010
9105 Wire Jumper, 0.58MM. 3198 036 90010
9106 Wire Jumper, 0.58MM. 3198 036 90010
9107 Wire Jumper, 0.58MM. 3198 036 90010
9108 Wire Jumper, 0.58MM. 3198 036 90010
9109 Wire Jumper, 0.58MM. 3198 036 90010
9110 Wire Jumper, 0.58MM. 3198 036 90010
9111 Wire Jumper, 0.58MM. 3198 036 90010
9112 Wire Jumper, 0.58MM. 3198 036 90010
9113 Wire Jumper, 0.58MM. 3198 036 90010
9114 Wire Jumper, 0.58MM. 3198 036 90010
9115 Wire Jumper, 0.58MM. 3198 036 90010
9116 Wire Jumper, 0.58MM. 3198 036 90010

System Panel Parts

System Panel Parts
1020 System Panel Asm.. . . . . 3135 037 10712
1008 Connector, 9 Pin 2422 025 16049
1009 Connector, 9 Pin 2422 025 16049
1200 Connector, 5 Pin 2422 025 12481
1201 Connector, 10 Pin. 2422 025 12484
1202 Switch, Tactile. 2422 128 02742
1203 Tuner, V+U PLL 2422 542 90077
1204 Switch, Tactile. 2422 128 02742
1205 Connector, SIMM, 80 Pin. 2422 025 16599
1207 Connector, 4 Pin 2422 025 12479
1210 Connector, 64 Pin. 2422 025 17715
1214 Connector, 10 Pin. 2422 025 12484
1215 Connector, 1 Pin 2422 015 18552
1216 Connector, 1 Pin 2422 015 18551
1217 Connector, 1 Pin 2422 015 18552
1218 Connector, 1 Pin 2422 015 18552
1220 Connector, 64 Pin. 2422 025 17715
1241 Connector, 7 Pin 2422 025 11244
1244 Connector, 3 Pin 2412 020 00725
1251 Connector, 3 Pin 2412 020 00725
1252 Connector, 6 Pin 2422 025 17955
1262 Connector, 3 Pin 2422 025 10768
1303 Connector, 5 Pin 2422 025 10428
1305 Connetort, 7 Pin 2422 025 09407
1312 Connector, 7 Pin 2422 025 11244
1313 Connector, 8 Pin 2422 025 10648
1314 Connector, 9 Pin 2422 025 12827
1335 Connector, 11 Pin. 2422 025 12485
1337 Connector, 1 Pin 2422 015 18552
1344 Connector, 5 Pin 2422 025 12481
1403 Connector, 12 Pin. 2422 025 08333
1600 Resonator Crystal, 12Mhz, 20P, DSX840 R. 2422 543 01095
1681 Connector, 3 Pin 2422 025 10768
1683 Connector, 5 Pin, FFC 0.3. . . . . 2422 025 16563
1700 Connector, 8 Pin 2422 025 12483
2101 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2102 Cap, 100u, 20%, 50v, Electrolytic. . . . 3198 025 51010
2103 Cap, 220u, 20%, 16v, Electrolytic. . . . 3198 025 22210
2104 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2105 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2106 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2107 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2108 Cap, 2u2, 20%, 25v, Electrolytic 2020 021 91551
2109 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2110 Cap, 470u, 20%, 16v, Electrolytic. . . . 2020 021 91687
2111 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2112 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2113 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2114 Cap, 1000u, 20%, 16v, Electrolytic . . . 3198 026 21020
2115 Cap, 2u2, 20%, 10v, Electrolytic 2020 021 91668
2116 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2117 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2118 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040

S = Safety Part Be sure to use exact replacement part.

2119 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2120 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2121 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2122 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2123 Cap, 330u, 20%, 16v, Electrolytic. . . . 2020 021 91536
2124 Cap, 470u, 20%, 10v, Electrolytic. . . . 2020 021 91569
2125 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2126 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2127 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2129 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2130 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2201 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2202 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2203 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2204 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2205 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2206 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2207 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2208 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2209 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2210 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2211 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2212 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2213 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2214 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2215 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2216 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2218 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2219 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2301 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2302 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2303 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2306 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2307 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2308 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2309 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2312 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2313 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2314 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2315 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2316 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2317 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2318 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2319 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2320 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2321 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2322 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2323 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2324 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2325 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2326 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2327 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2328 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2329 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2330 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2331 Cap, 22n, +80/-20%, 50v, Ceramic 3198 017 22230
2332 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2333 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2334 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2335 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2336 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2337 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2338 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2339 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2340 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2341 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2342 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2343 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2344 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2345 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2347 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2348 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2349 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2350 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2351 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2352 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2353 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2354 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2355 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2356 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2357 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2358 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2359 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2360 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2361 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2362 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2363 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2364 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2365 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2366 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2367 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2368 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2369 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2370 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2371 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2372 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2374 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2375 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2376 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2377 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2378 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2379 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2380 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2381 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2382 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2383 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2384 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2385 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2386 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2387 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2388 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2389 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2390 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2391 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2392 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2393 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2394 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2395 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2396 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
3101 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3102 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3106 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3108 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3109 Res, 10K, 1%, 1/8W, Metalized Glass. . . 2322 734 61003
3110 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3111 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3112 Res, 120K, 1%, 1/8W, Metalized Glass . . 2322 734 61204
3113 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3118 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3119 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3120 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3121 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3122 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3201 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3202 Res, 3K9, 5%, 1/10W, Metalized Glass . . 3198 021 53920
3203 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3204 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3205 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3206 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3207 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3208 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3209 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3210 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3211 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3212 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3213 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3214 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3215 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3216 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3217 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3218 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3219 Res, 270 ohm, 5%, 1/10W, Metalized Glass 3198 021 52710
3220 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3221 Res, 27K, 5%, 1/10W, Metalized Glass . . 3198 021 52730
3222 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3223 Res, 180 ohm, 5%, 1/10W, Metalized Glass 3198 021 51810
3224 Res, 330 ohm, 5%, 1/10W, Metalized Glass 3198 021 53310
3225 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3226 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3227 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3228 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3229 Res, 22 ohm, 5%, 1/10W, Metalized Glass. 3198 021 52290
3230 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3231 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3232 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3234 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3235 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 2322 734 66801
3236 Res, 560 ohm, 5%, 1/10W, Metalized Glass 3198 021 55610
3237 Res, 1K2, 1%, 1/8W, Metalized Glass. . . 2322 734 61202
3238 Res, 220K, 5%, 1/10W, Metalized Glass. . 3198 021 52240
3239 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3240 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3241 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3242 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3243 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 2322 734 62202
3305 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3306 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3307 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3308 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3309 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010

S = Safety Part Be sure to use exact replacement part.

3310 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3311 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3312 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3313 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3314 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3315 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3316 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3317 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3318 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3319 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3320 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3321 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3323 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3324 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3325 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3326 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3328 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3329 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3330 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3331 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3332 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3333 Res, 33 ohm, 5%, 1/10W, Metalized Glass. 3198 021 53390
3334 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3335 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3336 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3337 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3338 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3339 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3340 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3341 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3342 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3343 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3344 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3345 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3346 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3347 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3348 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3349 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3350 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3351 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3352 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3353 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3354 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3355 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3356 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3357 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3358 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3359 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3360 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3361 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3362 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3363 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3364 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3365 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3366 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3370 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3371 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3372 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3373 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3374 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3375 Res, 15K, 5%, 1/10W, Metalized Glass . . 3198 021 51530
3376 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3377 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3378 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3379 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3380 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3381 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3382 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3383 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3384 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3385 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3390 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3391 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3392 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3393 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3394 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3395 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3396 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
4104 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4105 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4106 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4107 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4108 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4109 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4110 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4118 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4119 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4120 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4121 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4129 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5101 Coil, 6u8. . . . . 2422 535 94819
5102 Coil, 1u 2422 535 95387
5103 Coil, 1u 2422 535 95387
5104 Coil, 1u 2422 535 95387
5106 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5107 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5108 Coil, 1u 2422 535 95387
5109 Coil, 1u 2422 535 95387
5110 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5111 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5112 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5113 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5301 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5302 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5303 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5304 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5305 Coil, 2u2. . . . . 3198 018 42280
5306 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5307 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5308 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5309 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5310 Coil, 8u2. . . . . 3198 018 28280
5311 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5312 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5313 Coil, 330u 2422 535 94649
5315 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5316 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5317 Coil, 8u2. . . . . 2422 535 96517
6101 Diode, Signal, BAS316. . . . . 3198 010 10630
6102 Diode, Signal, BAS316. . . . . 3198 010 10630
6103 Diode, Signal, BAS316. . . . . 3198 010 10630
6104 Diode, Signal, BAS316. . . . . 3198 010 10630
6105 Diode, Rect, SB140. . . . . 9339 577 60673
6106 Diode, Signal, BAS316. . . . . 3198 010 10630
6107 Diode, Signal, BAS316. . . . . 3198 010 10630
6108 Diode, Signal, BAS316. . . . . 3198 010 10630
6109 Diode, Signal, BAS316. . . . . 3198 010 10630
6110 Diode, Signal, BAS316. . . . . 3198 010 10630
6111 Diode, Signal, BAS316. . . . . 3198 010 10630
6112 Zener Diode, 15 volt 9335 006 90133
6113 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6114 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6201 Zener Diode, 6.8 volt. 9340 548 55115
6202 Zener Diode, 6.8 volt. 9340 548 55115
6300 Diode, Signal, BAS316. . . . . 3198 010 10630
6301 Diode, Signal, BAS316. . . . . 3198 010 10630
6302 Diode, Signal, BAS316. . . . . 3198 010 10630
6304 Diode, Signal, BAS316. . . . . 3198 010 10630
6305 Diode, Signal, BAS316. . . . . 3198 010 10630
6306 Diode, Signal, BAS316. . . . . 3198 010 10630
7001 Transistor, NPN, BC847B. 3198 010 42030
7002 Transistor, NPN, BC847B. 3198 010 42030
7003 Transistor, NPN, BC847B. 3198 010 42030
7004 Transistor, NPN, BC847B. 3198 010 42030
7005 Transistor, PNP, BC857B. 3198 010 42150
7006 Transistor, PNP, BC857B. 3198 010 42150
7007 Transistor, PNP, BC857B. 3198 010 42150
7008 Transistor, NPN, BC847B. 3198 010 42030
7009 Transistor, NPN, BC847B. 3198 010 42030
7010 Transistor, NPN, BC847B. 3198 010 42030
7011 Transistor, NPN, BC847B. 3198 010 42030
7012 Transistor, NPN, BC847B. 3198 010 42030
7013 Transistor, PNP, BC857B. 3198 010 42150
7014 F.E.T. STD3NK60Z. 9322 195 38668
7015 Transistor, PNP, BC857B. 3198 010 42150
7017 Transistor, PNP, BC857B. 3198 010 42150
7018 Transistor, NPN, BC847B. 3198 010 42030
7020 Transistor, NPN, BC847B. 3198 010 42030
7021 Transistor, NPN, BC847B. 3198 010 42030
7022 Transistor, NPN, BC847B. 3198 010 42030
7023 Transistor, NPN, BC847B. 3198 010 42030
7024 Transistor, PNP, BC857B. 3198 010 42150
7025 Transistor, NPN, BC847B. 3198 010 42030
7101 IC, TC74HC590AF-EL 9322 167 76668
7102 IC, TC74HC590AF-EL 9322 167 76668
7103 IC, CY7C199-15ZC 9322 153 66668
7104 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7105 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7106 IC, CD74ACT151M. 9322 195 64668
7107 IC, M24C32-WMN6. . . . . 9322 124 74668
7108 IC, P89C668HBA/00. . . . . 9352 654 18112
7109 IC, TL431BCLP. 9322 115 98676
7110 IC, TLC0832CD. 9322 185 44668
7111 IC, NE555D 9336 561 10623
7113 IC, TEA6422D 9322 116 87668
7114 IC, PCF8574T 9337 280 80118
7115 IC, TL431BCLP. 9322 115 98676
7116 IC, TDA7309D 9322 110 45668
7117 IC, TDA1308T/N1. . . . . 9350 721 10115

S = Safety Part Be sure to use exact replacement part.

7118	IC, NE555D	9336 561 10623	
7120	F.E.T. Signal, BSN20	9340 125 00235	
7121	F.E.T. Signal, BSN20	9340 125 00235	
9001	Wire Jumper, 0.58MM.	3198 036 90010	
9002	Wire Jumper, 0.58MM.	3198 036 90010	

LED Sensor Panel Parts

LED Sensor Panel Parts

1024	LED Panel Asm.	3135 037 10741	
0207	Holder, LED.	3139 124 23831	
0209	Holder, Photo Diode.	3104 304 19732	
1201	Connector, 4 Pin	2422 025 12489	
1214	Connector, 10 Pin.	2422 025 12493	
2001	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2002	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2003	Cap, 100u, 20%, 10v, Electrolytic.	3198 025 11010	
2004	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
3001	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510	
3002	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710	
3003	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220	
3004	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	
3005	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3006	Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310	
3007	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520	
3008	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820	
3009	Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155	
3010	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	
3011	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	
3012	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	
3013	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	
3014	Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155	
3016	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	
3017	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
4003	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
4004	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
4005	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
6000	LED, TLUV5300.	9338 792 00682	
6003	IR Receiver, TSOP2136UH1	9322 159 21667	
6004	Optical Sensor, BPW46.	9322 032 38682	
7000	IC, LM358DR2	9339 265 90668	
7001	Transistor, NPN, BC847B.	3198 010 42030	

Side Jack Panel Parts

Side Jack Panel Parts

1028	Side Jack Panel Asm.	3135 037 10751	
1300	Switch, Push, 2 Pin, 2 Position, 30v	2422 128 03068	
1301	Socket, MDin, 4 Pin, TCS7959 Y	2422 026 05157	
1302	Socket, Cinch, 3 Pin	2422 026 05493	
1303	Socket, Phone, 1 Pin	2422 026 04747	
1335	Connector, 11 Pin.	2422 025 12485	
1337	Connector, 1 Pin	2422 015 18552	
1344	Connector, 5 Pin	2422 025 12481	
2107	Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810	
2108	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
2109	Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810	
2110	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
2111	Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810	
2112	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
2113	Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810	
2114	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
2115	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
3106	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590	
3107	Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590	
3115	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010	
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3117	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3119	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3120	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	
3121	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	
3122	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3123	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	
3124	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	
3125	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
5001	Coil, 270n	3198 018 32770	
5002	Coil, 270n	3198 018 32770	
6001	Zener Diode, 6.8 volt.	9340 386 40115	
6002	Zener Diode, 6.8 volt.	9340 386 40115	
6003	Zener Diode, 6.8 volt.	9340 386 40115	
6004	Zener Diode, 6.8 volt.	9340 386 40115	
6005	Zener Diode, 6.8 volt.	9340 386 40115	
6006	Zener Diode, 6.8 volt.	9340 386 40115	
6007	Zener Diode, 6.8 volt.	9340 386 40115	
6008	Zener Diode, 6.8 volt.	9340 386 40115	
6009	Zener Diode, 6.8 volt.	9340 386 40115	
6010	Zener Diode, 6.8 volt.	9340 386 40115	
6011	Zener Diode, 6.8 volt.	9340 386 40115	
6012	Zener Diode, 6.8 volt.	9340 386 40115	

LED/Keyboard Panel Parts

S = Safety Part Be sure to use exact replacement part.

1032	LED/Keyboard Panel Asm.	3135 037 10771	
1001	Switch, Tactile.	2422 128 02742	
1002	Switch, Tactile.	2422 128 02742	
1003	Switch, Tactile.	2422 128 02742	
1004	Switch, Tactile.	2422 128 02742	
1005	Switch, Tactile.	2422 128 02742	
1006	Switch, Tactile.	2422 128 02742	
1201	Connector, 4 Pin	2422 025 12489	
1202	Connector, 1 Pin	2422 015 18551	
1203	LED, Holder (Not Shown).	3135 034 00711	
3001	Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322 734 63901	
3002	Res, 200 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62001	
3003	Res, 620 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66201	
3004	Res, 1K1, 1%, 1/8W, Metalized Glass.	2322 734 61102	
3006	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002	
3007	Res, 2K4, 1%, 1/8W, Metalized Glass.	2322 734 62402	
3009	Res, 910 ohm, 1%, 1/8W, Metalized Glass.	2322 734 69101	
3010	Res, 160 ohm, 1%, 1/8W, Metalized Glass.	2322 734 61601	
3011	Res, 120 ohm, 5%, 1/10W, Metalized Glass	3198 021 51210	
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
6001	Zener Diode, 6.8 volt.	9340 386 40115	
6002	Zener Diode, 6.8 volt.	9340 386 40115	
6003	LED, TLHB5400.	9322 188 10682	
7000	Transistor, NPN, BC847B.	3198 010 42030	

Thermal Sensor Panel Parts

Thermal Sensor Panel Parts

1034	Thermal Sensor Panel Asm.	3135 037 10781	
1202	Connector, 3 Pin	2422 025 10775	
2001	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	
2002	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	
3001	Res, 5K6, 1%, 1/8W, Metalized Glass.	2322 734 65602	
3002	Res, 68K, 1%, 1/8W, Metalized Glass.	2322 734 66803	
3003	Res, 820 ohm, 1%, 1/8W, Metalized Glass.	2122 118 05988	
3004	Res, 680 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66801	
3005	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010	
S 3006	NTC, 10K, 5%, 1/2W	2322 640 33103	
3007	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050	
3008	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
7001	Transistor, NPN, BC847B.	3198 010 42030	
7002	Transistor, NPN, BC847B.	3198 010 42030	

Input Power Panel Parts

Input Power Panel Parts

1045	Input Power Panel Asm.	3135 037 11421	
0001	Insulator, SP-900.	3135 010 02331	
0002	Clip, Transistor	3135 011 02681	
0013	Spring	3139 121 24583	
0014	Spring	3139 121 24583	
0018	Insulator, SP-900.	3135 010 02331	
0019	Clip, Transistor	3135 011 02681	
0020	Spring	3139 121 24583	
0201	Spring	3135 011 01041	
0215	Insulator.	3135 010 02321	
1206	Connector, 1 Pin	2422 015 18552	
1208	Surge Protector, DSP-501N-A21F	2422 549 42349	
1209	Connector, 1 Pin	2422 015 18552	
S 1210	Relay, 1 Pin, 5V, 5A	2422 132 07411	
S 1211	Fuse/Clip, 6A3, 250V, IEC.	2422 093 00036	
1212	Connector, 4 Pin	2422 025 15503	
S 1214	Protection Device, 5.5 KVDC, UL5500.	2422 549 43369	
1215	Heatsink	3135 031 60051	
1217	Connector, 1 Pin	2422 015 18552	
1218	Connector, 1 Pin	2422 015 18552	
1310	Connector, 2 Pin	2422 025 11196	
1311	Connector, 6 Pin	2422 025 14044	
1316	Connector, 4 Pin	2422 025 10647	
1401	Heatsink	3135 031 60071	
1402	Heatsink, TO-220	3135 031 60133	
1403	Connector, 12 Pin.	2422 025 08333	
1410	Connector, 2 Pin	2412 020 00724	
1460	Connector, 3 Pin	2412 020 00725	
1518	Heatsink	3135 031 60071	
1520	Heatsink, TO-220	3135 031 60133	
2200	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557	
2201	Cap, 220n, 20%, 275v, Metalized Polypropylene	2222 336 29146	
2202	Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747	
2203	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557	
2205	Cap, 680n, 20%, 275v, Metalized Polypropylene	2222 336 29149	
2209	Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747	
2210	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	
2211	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	
2212	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557	
S 2213	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169	
S 2214	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169	
2215	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	
2216	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	
2217	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557	
2219	Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759	

S	2220	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
	2225	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
	2249	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S	2421	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
	2423	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
	2424	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
	2431	Cap, 100p, 10%, 1000v, Ceramic	2252 711 95001
	2432	Cap, 1n, 10%, 1000v, Ceramic	3198 019 61020
	2433	Cap, 100p, 10%, 1000v, Ceramic	2252 711 95001
S	2435	Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
	2436	Cap, 47u, 20%, 50v, Electrolytic	2020 021 91521
	2437	Cap, 100p, 10%, 1000v, Ceramic	2252 711 95001
	2441	Cap, 22u, 20%, 35v, Electrolytic	2020 021 91811
	2442	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
	2443	Cap, 4n7, 10%, 50v, Ceramic	3198 019 14720
	2444	Cap, 22u, 20%, 35v, Electrolytic	2020 021 91811
	2453	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
	2454	Cap, 1000u, 20%, 35v, Electrolytic	2020 021 91411
	2456	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
	2457	Cap, 1000u, 20%, 35v, Electrolytic	2020 021 91411
	2472	Cap, 220u, 20%, 10v, Electrolytic	3198 025 12210
	2473	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
	2522	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
	2523	Cap, 470p, 10%, 50v, Ceramic	3198 019 14710
	2530	Cap, 220p, 10%, 1000v, Ceramic	3198 019 62210
	2534	Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759
	2535	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
	2536	Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
	2541	Cap, 10u, 20%, 50v, Electrolytic	2020 021 91808
	2542	Cap, 10n, +80/-20%, 50v, Ceramic	3198 019 21030
	2543	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019 22230
	2544	Cap, 47u, 20%, 16v, Electrolytic	2020 021 91804
	3204	Res, 2M2, 5%, 1/2W, Metalized Glass	2322 242 13225
	3207	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
	3210	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
	3211	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
S	3212	VDR, DC, 1MA/495V, MAX 850VB.	2322 595 90021
	3213	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
	3214	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
	3215	Res, 0R68, 10%, 5W, Wire Wound	2322 251 41687
	3216	Res, 4M7, 5%, 1/2W, Metalized Glass	2322 242 13475
	3217	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103 90042
	3218	Res, 4M7, 5%, 1/2W, Metalized Glass	2322 242 13475
	3219	Res, 4M7, 5%, 1/2W, Metalized Glass	2322 242 13475
	3245	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3246	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3247	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3248	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3249	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3252	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3253	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3403	Res, 12K, 5%, 1/6W, Carbon Film	3198 011 01230
	3425	Res, 100 ohm, 5%, 3W, Metal Film	2120 105 93581
	3426	Res, 56K, 1%, 3/5W, Metal Film	2312 915 15603
	3429	Res, 1K2, 5%, 1/6W, Carbon Film	3198 011 01220
	3430	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3431	Res, 56K, 5%, 1/6W, Carbon Film	3198 011 05630
	3432	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3433	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3438	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
	3441	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
	3444	Res, 820K, 1%, 3/5W, Metal Film	2312 915 18204
	3445	Res, 100K, 1%, 3/5W, Metal Film	2312 915 11004
	3453	Res, 33 ohm, 5%, 2W, Metal Film	2120 105 93418
	3456	Res, 33 ohm, 5%, 2W, Metal Film	2120 105 93418
	3460	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	3461	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	3462	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3463	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3464	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
	3465	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
	3466	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3470	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011 04790
	3471	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020
	3472	Res, 1K2, 5%, 1/6W, Carbon Film	3198 011 01220
	3473	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3474	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3475	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3476	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3522	Res, 33 ohm, 5%, 2W, Metal Film	2120 105 93418
	3526	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
	3533	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
	3536	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3537	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
	3538	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
	3539	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710
	3540	Res, 150K, 1%, 3/5W, Metal Film	2312 915 11504
	3541	Res, 150K, 1%, 3/5W, Metal Film	2312 915 11504
	3542	Res, 120K, 1%, 3/5W, Metal Film	2312 915 11204
	3543	Res, 3K, 1%, 1/8W, Metalized Glass	2322 734 63002
	3544	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	5210	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
	5211	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
	5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5213	Filter, Mains, 8mH, 7A, JLB2806.	2422 549 44591
	5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5218	Filter, Mains, 8mH, 7A, JLB2806.	2422 549 44591
	5406	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5407	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5408	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5409	Coil, 1u	2422 535 95387
	5410	Transformer, SMT Layer, US28206-01	2422 531 02553
	5411	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5412	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5417	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5419	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5420	Coil, 1u	2422 535 95387
	5422	Coil, 1u	2422 535 95387
	5502	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5503	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5507	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5509	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5510	Coil, Choke, 190uH, UC28214-03 Y	2422 536 00594
	5514	Filter, Mains, 100uH, 2A2, W8051	2422 549 44101
	6200	Diode, Signal, 1N4148.	3198 010 10010
	6201	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6202	Diode, Bridge Rect, GBU4JL-7002	9322 132 55667
	6402	Diode, Signal, 1N4148.	3198 010 10010
	6403	Diode, Signal, BAS316.	3198 010 10630
	6404	Optic Coupler, CQY80NG	9338 941 50682
	6405	Diode, Rect, BYV95C	9335 001 80133
	6406	Zener Diode, 18 volt	3198 010 21890
	6407	Zener Diode, 6.8 volt.	3198 010 26880
	6408	Diode, Signal, BAS316.	3198 010 10630
	6409	Diode, Signal, 1N4148.	3198 010 10010
	6410	Optic Coupler, CQY80NG	9338 941 50682
	6411	Diode, Rect, BY229X-800	9340 380 30127
	6413	Diode, Rect, BYW29EX-200.	9340 412 80127
	6414	Diode, Rect, BYW29EX-200.	9340 412 80127
	6501	Diode, Rect, BYV29F-400	9338 673 00127
	7211	Transistor, NPN, BC547B.	3198 020 40030
	7212	Transistor, PNP, BC857B.	3198 010 42150
	7402	IC, TOP247Y.	9322 181 88687
	7406	IC, TL431BCLP.	9322 115 98676
	7408	Transistor, PNP, BC857B.	3198 010 42150
	7409	Transistor, NPN, BC847B.	3198 010 42030
	7410	Transistor, PNP, BC857B.	3198 010 42150
	7411	Transistor, NPN, BC847B.	3198 010 42030
	7412	Transistor, PNP, BC857B.	3198 010 42150
	7500	Transistor, PNP, BC857B.	3198 010 42150
	7502	IC, TOP247Y.	9322 181 88687
	7506	IC, TL431BCLP.	9322 115 98676
	9010	Wire Jumper, 0.58MM.	3198 036 90010
	9011	Wire Jumper, 0.58MM.	3198 036 90010
	9016	Wire Jumper, 0.58MM.	3198 036 90010
	9020	Wire Jumper, 0.58MM.	3198 036 90010
	9022	Wire Jumper, 0.58MM.	3198 036 90010
	9023	Wire Jumper, 0.58MM.	3198 036 90010
	9024	Wire Jumper, 0.58MM.	3198 036 90010
	9025	Wire Jumper, 0.58MM.	3198 036 90010
	9026	Wire Jumper, 0.58MM.	3198 036 90010
	9027	Wire Jumper, 0.58MM.	3198 036 90010
	9028	Wire Jumper, 0.58MM.	3198 036 90010
	9029	Wire Jumper, 0.58MM.	3198 036 90010
	9201	Wire Jumper, 0.58MM.	3198 036 90010
	9204	Wire Jumper, 0.58MM.	3198 036 90010
	9206	Wire Jumper, 0.58MM.	3198 036 90010
	9207	Wire Jumper, 0.58MM.	3198 036 90010

Audio Amp Panel Parts

Audio Amp Panel Parts

	0070	Clip, Transistor	3135 011 02681
	0071	Insulator.	3135 010 02351
	1012	Audio Amp Panel Asm.	3135 037 11411
	1216	Connector, 1 Pin	2422 015 18551
	1305	Connetort, 7 Pin	2422 025 09407
	1316	Connector, 4 Pin	2422 025 10647
	1321	Connector.	2422 025 15781
	1700	Connector, 8 Pin	2422 025 12483
	1701	Heatsink, Vertical, Audio.	3135 031 60151
	1702	Thyristor, BT169B.	9338 268 50126
	1703	Inductor, fixed, line Filter, 50V, 2A4	2422 549 43778
	1704	Inductor, fixed, line Filter, 50V, 2A4	2422 549 43778
	2701	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365 75684
	2702	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017 21030
	2703	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365 75684
	2704	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017 21030
	2705	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
	2706	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
	2707	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
	2708	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
	2709	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
	2710	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
	2711	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

2712 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2713 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2714 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2715 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2716 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2717 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2718 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2719 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2720 Cap, 220n, +80/-20%, 25v, Ceramic. . . . 3198 023 22240
2721 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2722 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2723 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2724 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2725 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2726 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2727 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2728 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2729 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2730 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2731 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2732 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2733 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2734 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2735 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2736 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2737 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2739 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2740 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2741 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2742 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2743 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2744 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2745 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2763 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2776 Cap, 47u, 20%, 50v, Electrolytic 3198 025 54790
2777 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2780 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
2781 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
3701 Res, 10K, 5%, 1/6W, Carbon Film. 3198 011 01030
3702 Res, 6K8, 5%, 1/6W, Carbon Film. 3198 011 06820
3703 Res, 33K, 5%, 1/10W, Metalized Glass . . 3198 021 53330
3704 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3705 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3706 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3707 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3708 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3709 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3710 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3711 Res, 120K, 5%, 1/4W, Carbon Film 2122 101 02074
3712 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3713 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3714 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3715 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
3716 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3717 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3718 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3719 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3720 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3721 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3722 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3723 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3724 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3725 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3726 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3727 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3728 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3729 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3730 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3731 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3732 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3733 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3734 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3790 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3791 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3792 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3793 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3796 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3797 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3798 Res, 3K3, 5%, 1/6W, Carbon Film. 3198 011 03320
3799 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
4700 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4701 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5701 Inductor, Fixed, 68uH, 10% 2422 536 00504
5702 Inductor, Fixed, 68uH, 10% 2422 536 00504
5707 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5708 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5713 Coil, 1u 2422 535 95387
5714 Coil, 1u 2422 535 95387
5715 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5716 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
6701 Diode, Signal, 1N4148. . . . . 3198 010 10010
6702 Diode, Signal, 1N4148. . . . . 3198 010 10010
6703 Diode, Signal, 1N4148. . . . . 3198 010 10010
6704 Diode, Signal, BAS316. . . . . 3198 010 10630
6705 Diode, Signal, BAS316. . . . . 3198 010 10630
6706 Diode, Signal, BAS316. . . . . 3198 010 10630
6707 Diode, Signal, BAS316. . . . . 3198 010 10630
6708 Diode, Signal, BAS316. . . . . 3198 010 10630
6709 Diode, Signal, BAS316. . . . . 3198 010 10630
6710 Diode, Signal, BAS316. . . . . 3198 010 10630
6711 Diode, Signal, BAS316. . . . . 3198 010 10630
7700 IC, TDA7490. . . . . 9322 147 50667
7701 Transistor, NPN, BC847B. 3198 010 42030
7704 Transistor, NPN, BC847B. 3198 010 42030
7705 Transistor, NPN, BC847B. 3198 010 42030
7706 Transistor, PNP, BC857B. 3198 010 42150
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 Transistor, NPN, BC847B. 3198 010 42030
9012 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9027 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9034 Wire Jumper, 0.58MM. 3198 036 90010

DW PIP Panel Parts

DW PIP Panel Parts
0200 Connector, Printed Circuit 4822 267 10734
0201 Connector, B10B-EH-A 4822 267 10557
0205 Connector, 10 Pin. 2422 025 16587
0207 Connector, Printed Circuit, 4 Pin. . . . 4822 267 10565
0236 Connector, Printed Circuit 4822 267 10735
0237 Connector, Printed Circuit, 1 Pin. . . . 4822 267 10676
1184 DW PIP Panel Asm.. . . . . 3139 177 20061
1327 Crystal, 12 Mhz. 4822 242 10694
1334 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1352 Filter, SAW, 45MHZ75. . . . . 2422 549 43074
1501 Crystal, Resonator, 32Khz76. . . . . 2422 543 01069
2261 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2262 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2265 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2269 Cap, 47n, 10%, 50v, Ceramic. 4822 126 13751
2301 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2302 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2303 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2306 Cap, 10n, 10%, 50V 5322 126 11583
2309 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2311 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2312 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2313 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2314 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2316 Cap, 22n, 10%, 25V 4822 126 14494
2317 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2319 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2321 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2322 Cap, 10u, 20%, 63V 4822 124 40248
2324 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2327 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2328 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2331 Cap, 2u2, 20%, 50v, Electrolytic 4822 124 22652
2332 Cap, 220n, +/-80/20, 25v, Ceramic. . . . 4822 126 14076
2333 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2334 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2335 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2336 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2338 Cap, 2,2nF, 10%, 63V, Ceramic. 4822 122 33127
2342 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2345 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2348 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2351 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2354 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2355 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2356 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2357 Cap, 10p, 1%, 50v, Ceramic 2238 861 18109
2372 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2373 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2374 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2375 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2376 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2377 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2380 Cap, 10u, 20%, 63V 4822 124 40248
2385 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2386 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2390 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2391 Cap, 100p, 5%, 50v, Ceramic. 2020 552 94427
2392 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2393 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2401 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2402 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050

S = Safety Part Be sure to use exact replacement part.

2403 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2404 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2405 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2411 Cap, 10u, 20%, 63V 4822 124 40248
2412 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2415 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2431 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2432 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2434 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2436 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2438 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2439 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2440 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2501 Cap, 22p, 5%, 50V Ceramic. 5322 122 32658
2502 Cap, 8.2p, 0.5%, 50V 4822 126 14487
2503 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2504 Cap, 68n, 10%, 25v, Ceramic. 2020 552 96325
2505 Cap, 560p, 10%, 50v, Ceramic 4822 126 14249
2506 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2507 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2508 Cap, 6n8, 10%, 63v, Ceramic. 5322 126 11582
2509 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2511 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2811 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2812 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2813 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2814 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2816 Cap, 10u, 20%, 63V 4822 124 40248
2817 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2818 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2819 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2821 Cap, 10u, 20%, 63V 4822 124 40248
2822 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2823 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2824 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2825 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2826 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2827 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2828 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2829 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2831 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2832 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2833 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2834 Cap, 10u, 20%, 63V 4822 124 40248
2836 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2837 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2838 Cap, 220u, 20%, 6.3v, Electrolytic . . . 4822 124 11912
2839 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2841 Cap, 10u, 20%, 63V 4822 124 40248
2842 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2843 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2844 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2846 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2847 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2848 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2849 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2851 Cap, 10u, 20%, 63V 4822 124 40248
2852 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2853 Cap, 10u, 20%, 63V 4822 124 40248
2854 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2856 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2857 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2861 Cap, 10u, 20%, 63V 4822 124 40248
2862 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2863 Cap, 22u, 50v, Electrolytic Aluminum . . 4822 124 81151
2864 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2866 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2867 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2868 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2869 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2871 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2872 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2873 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2874 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2876 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2877 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2878 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2879 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2891 Cap, 1nF, 10%, 63V, Ceramic. 5322 122 31647
2892 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2893 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2894 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2895 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2896 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2897 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2898 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2899 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
3263 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 4822 117 11449
3264 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3267 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3268 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3270 Res, Zero ohm, "Chip" Jumper 4822 051 20008

3301 Res, 1k, 5%, 1/16W 4822 051 30102
3302 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3305 Res, 2K7, 1%, 1/8W, Metalized Glass. . . 4822 117 12955
3311 Res, 27K, 5%, 1/8W, Metalized Glass. . . 4822 051 20273
3312 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3315 Res, 39K, 1%, 1/8W, Metalized Glass. . . 4822 117 12708
3316 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3318 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3321 Res, 10k, 5%, 1/16W. 4822 051 30103
3322 Res, 8K2, 1%, 1/16W. 4822 117 12902
3324 Res, 390 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20391
3326 Res, 1K, 1%, 0,125W. 5322 117 12487
3327 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3329 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3330 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3333 Res, 1k, 5%, 1/16W 4822 051 30102
3334 Res, 470R, 5%, 0,062W. 4822 051 30471
3335 Res, 120 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20121
3336 Res, 1k, 5%, 1/16W 4822 051 30102
3338 Res, 75 ohm, 1%, 1/8W, Metalized Glass . 4822 117 11927
3339 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3340 Res, 2k2, 5%, 1/16W. 4822 051 30222
3341 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3344 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3346 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3347 Res, 390 ohm, 5%, 1/16W. 4822 051 30391
3348 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3364 Res, 1k, 5%, 1/16W 4822 051 30102
3365 Res, 1K, 1%, 0,125W. 5322 117 12487
3370 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3371 Res, 15K, 1%, 1/8W, Metalized Glass. . . 4822 116 83933
3374 Res, 4k7, 5%, 1/16W. 4822 051 30472
3381 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3382 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3383 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3384 Res, 10k, 5%, 1/16W. 4822 051 30103
3385 Res, 4k7, 5%, 1/16W. 4822 051 30472
3386 Res, 10k, 5%, 1/16W. 4822 051 30103
3387 Res, 39K, 5%, 0,062W 4822 051 30393
3388 Res, 10k, 5%, 1/16W. 4822 051 30103
3389 Res, 4k7, 5%, 1/16W. 4822 051 30472
3390 Res, 470R, 5%, 0,062W. 4822 051 30471
3401 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3402 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3403 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3404 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3405 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3411 Res, 47k, 1%, 1/16W. 4822 117 12925
3412 Res, 47k, 1%, 1/16W. 4822 117 12925
3413 Res, 1k, 5%, 1/16W 4822 051 30102
3414 Res, 47k, 1%, 1/16W. 4822 117 12925
3415 Res, 47k, 1%, 1/16W. 4822 117 12925
3416 Res, 1k, 5%, 1/16W 4822 051 30102
3417 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3418 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3419 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3423 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3424 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3431 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3432 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3437 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3438 Res, 470R, 5%, 0,062W. 4822 051 30471
3439 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3451 Res, 4k7, 5%, 1/16W. 4822 051 30472
3453 Res, 4k7, 5%, 1/16W. 4822 051 30472
3456 Res, 4k7, 5%, 1/16W. 4822 051 30472
3457 Res, 4k7, 5%, 1/16W. 4822 051 30472
3458 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3460 Res, 4k7, 5%, 1/16W. 4822 051 30472
3461 Res, 4k7, 5%, 1/16W. 4822 051 30472
3462 Res, 2R2, 5%, 1/3W, ... 4822 052 10228
3501 Res, 470K, 5%, 1/8W, Metalized Glass . . 4822 051 20474
3502 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3503 Res, 470R, 5%, 0,062W. 4822 051 30471
3504 Res, 6K8, 5%, 0,062W 4822 051 30682
3506 Res, 10k, 5%, 1/16W. 4822 051 30103
3507 Res, 6K8, 1%, 1/8W, Metalized Glass. . . 4822 117 11507
3508 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3509 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3510 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3801 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3802 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3803 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3804 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3805 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3806 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3807 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3808 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3809 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3810 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3811 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3812 Res, 47 ohm, 5%, 1/16W 4822 051 30479

S = Safety Part Be sure to use exact replacement part.

3813	Res, 150 ohm, 5%, 1/16W.	4822 051 30151
3814	Res, 22k, 5%, 1/16W.	4822 051 30223
3816	Res, 47 ohm, 5%, 1/16W	4822 051 30479
3817	Res, 150 ohm, 5%, 1/16W.	4822 051 30151
3818	Res, 47 ohm, 5%, 1/16W	4822 051 30479
3821	Res, 150 ohm, 5%, 1/16W.	4822 051 30151
3822	Res, 4k7, 5%, 1/16W.	4822 051 30472
3823	Res, 680 ohm, 1%, 1/8W, Metalized Glass.	4822 117 10361
3824	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3825	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3826	Res, 3k3, 5%, 1/16W.	4822 051 30332
3827	Res, 1K8, 1%, 0,063W	4822 117 12903
3828	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3829	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3831	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3832	Res, 39K, 5%, 0,062W	4822 051 30393
3833	Res, 3k3, 5%, 1/16W.	4822 051 30332
3834	Res, 1K8, 1%, 0,063W	4822 117 12903
3836	Res, 3k3, 5%, 1/16W.	4822 051 30332
3837	Res, 1K8, 1%, 0,063W	4822 117 12903
3838	Res, 39K, 5%, 0,062W	4822 051 30393
3839	Res, 220 ohm, 1%, 1/8W, Metalized Glass.	4822 117 11503
3846	Res, 220 ohm, 1%, 1/8W, Metalized Glass.	4822 117 11503
3854	Res, 100 ohm, 5%, 1/16W.	4822 051 30101
3856	Res, 5K6, 5%, 1/8W, Metalized Glass.	4822 051 20562
3857	Res, 10K, 1%, 1/8W, Metalized Glass.	4822 117 10833
3858	Res, 5K6, 5%, 1/8W, Metalized Glass.	4822 051 20562
3862	Res, 1R, 5%, 0,33W	4822 052 10108
3863	Res, 1R, 5%, 0,33W	4822 052 10108
3865	Res, 3k3, 5%, 1/16W.	4822 051 30332
3866	Res, 1k, 5%, 1/16W	4822 051 30102
3868	Res, 1K8, 1%, 0,063W	4822 117 12903
3869	Res, 3k3, 5%, 1/16W.	4822 051 30332
3871	Res, 2k2, 5%, 1/16W.	4822 051 30222
3872	Res, 470R, 5%, 0,062W.	4822 051 30471
3873	Res, 1k5, 5%, 1/16W.	4822 051 30152
3874	Res, 1k5, 5%, 1/16W.	4822 051 30152
3876	Res, 4K7, 5%, 1/8W, Metalized Glass.	4822 051 20472
3878	Res, 1k, 5%, 1/16W	4822 051 30102
3879	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3881	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3884	Res, 680 ohm, 1%, 1/8W, Metalized Glass.	4822 117 10361
3886	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3887	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3888	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3889	Res, 33 ohm, 5%, 1/16W	4822 051 30339
3890	Res, 33 ohm, 5%, 1/16W	4822 051 30339
3891	Res, 33 ohm, 5%, 1/16W	4822 051 30339
3892	Res, 4K7, 5%, 1/8W, Metalized Glass.	4822 051 20472
3893	Res, 1k5, 5%, 1/16W.	4822 051 30152
3894	Res, 2k2, 5%, 1/16W.	4822 051 30222
3895	Res, 470R, 5%, 0,062W.	4822 051 30471
3896	Res, 1k5, 5%, 1/16W.	4822 051 30152
3897	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
3898	Res, 1k, 5%, 1/16W	4822 051 30102
4301	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4306	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4309	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4310	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4311	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4312	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4313	Res, Zero ohm, "Chip" Jumper	4822 051 20008
4315	Res, Zero ohm, "Chip" Jumper	4822 051 20008
4434	Res, Zero ohm, "Chip" Jumper	4822 051 20008
4437	Res, Zero ohm, "Chip" Jumper	4822 051 20008
4438	Res, Zero ohm, "Chip" Jumper	4822 051 20008
4827	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4828	Res, Zero ohm, "Chip" Jumper	4822 051 30008
4831	Res, 220 ohm, 5%, 1/16W.	4822 051 30221
5261	Coil, Fixed, 5U6, 10%.	4822 157 11778
5309	Coil, 680n	4822 157 71334
5332	Coil, 680n	4822 157 71334
5333	Coil, 680n	4822 157 71334
5334	Coil, 680n	4822 157 71334
5349	Coil, 820n	4822 157 71694
5350	Coil, 15u.	3198 018 61590
5351	Coil, 15u.	3198 018 61590
5401	Coil, 4u7.	2422 535 94637
5501	Coil, 680n	4822 157 71334
5816	Filter, L/C, BLM21A121SPT	4822 157 11506
5818	Filter, L/C, BLM21A121SPT	4822 157 11506
5827	Filter, L/C, BLM21A121SPT	4822 157 11506
5834	Filter, L/C, BLM21A121SPT	4822 157 11506
5839	Filter, L/C, BLM21A121SPT	4822 157 11506
5848	Filter, L/C, BLM21A121SPT	4822 157 11506
5849	Filter, L/C, BLM21A121SPT	4822 157 11506
5851	Filter, L/C, BLM21A121SPT	4822 157 11506
5853	Filter, L/C, BLM21A121SPT	4822 157 11506
6412	Diode, BAS316.	4822 130 11397
6415	Diode, BAS316.	4822 130 11397
6801	Diode, Reference, UZ3.9B	4822 130 11564
6802	Diode, Reference, UZ3.9B	4822 130 11564
6803	Diode, BAS316.	4822 130 11397
7201	Tuner, V+U PLL	2422 542 90115
7301	IC, TDA8887H/N1.	9352 638 72557
7305	Transistor, NPN, BC847BW	3198 010 42310
7307	Transistor, NPN, BC847BW	3198 010 42310
7331	Transistor, NPN, BC857BW	3198 010 42320
7337	Transistor, NPN, BC847BW	3198 010 42310
7368	Transistor, NPN, BC847BW	3198 010 42310
7385	Transistor, NPN, BC847BW	3198 010 42310
7386	Transistor, NPN, BC847BW	3198 010 42310
7401	IC, Digital, MOS, HEF4053BT.	5322 209 14481
7402	IC, Digital, MOS, HEF4053BT.	5322 209 14481
7403	IC, Digital, MOS, M62320FP	4822 209 17345
7411	Transistor, NPN, BC847BW	3198 010 42310
7412	Transistor, NPN, BC847BW	3198 010 42310
7421	Transistor, NPN, BC857BW	3198 010 42320
7422	Transistor, NPN, BC857BW	3198 010 42320
7434	Transistor, BC369.	5322 130 44593
7438	Transistor, NPN, BC847BW	3198 010 42310
7501	IC, Digital, MOS, Z86130-12SSC	9322 147 01668
7801	IC, Digital, MOS DRAM, SAB9083H/N4	9352 639 83557
7802	IC, Analog Voltage/Current Regulator, LD1 117V33	9322 123 54687
7803	IC, TDA8601T/C1.	4822 209 12776
7804	IC, Digital, MOS, Standard Logic, 74HC1G32GW.	9352 457 50115
7805	Transistor, NPN, BC847BW	3198 010 42310
7806	Transistor, NPN, BC847BW	3198 010 42310
7807	Transistor, NPN, BC847BW	3198 010 42310
7808	Transistor, NPN, BC847BW	3198 010 42310
7809	Transistor, NPN, BC847BW	3198 010 42310
7810	Transistor, NPN, BC847BW	3198 010 42310
7824	Transistor, NPN, BC847BW	3198 010 42310
7828	Transistor, NPN, BC847BW	3198 010 42310
7832	Transistor, NPN, BC847BW	3198 010 42310
7871	Transistor, NPN, BC847BW	3198 010 42310
7874	Transistor, NPN, BC847BW	3198 010 42310
7876	Transistor, NPN, BC857BW	3198 010 42320
7891	Transistor, NPN, BC847BW	3198 010 42310
7892	Transistor, NPN, BC847BW	3198 010 42310
7893	Transistor, NPN, BC847BW	3198 010 42310
7894	Transistor, NPN, BC857BW	3198 010 42320
7895	Transistor, NPN, BC847BW	3198 010 42310

SSB Panel Parts

	SSB Panel Parts	
1001	Crystal Resonator, 6MHz, 20p	2422 543 89022
1100	Connector, V, F, 16 Pin.	2422 025 17202
1101	Filter, 50V, 67 ohm @ 100MHz	2422 549 45325
1102	Filter, 50V, 67 ohm @ 100MHz	2422 549 45325
1103	Filter, 50V, 67 ohm @ 100MHz	2422 549 45325
1104	Filter, 50V, 67 ohm @ 100MHz	2422 549 45325
1105	Filter, 50V, 67 ohm @ 100MHz	2422 549 45325
1185	SSB Panel Assembly	3135 037 12471
1303	Connector, 5 Pin, M.	2422 025 16966
1304	Connector, 7 Pin, M.	2422 025 17104
1308	Crystal Resonator, 3.579545MHz., 16P, HC49/U A.	2422 543 01183
1401	Connector, V, 10 Pin,, F	2422 025 16729
S 1403	Fuse, 500mA, F, 50V.	2422 086 11092
1406	Filter, Ceramic, 4MHZ5, TPSCC*MB.	2422 549 44043
1410	Filter, S.A.W. 45Mhz75	2422 549 44377
1411	Filter, Ceramic, 4.5Mhz.	2422 549 44534
1651	Crystal Resonator, 18.432MHz, 12P.	2422 543 89019
1680	Connector, V, 6 Pin, M	2422 025 16961
1681	Connector, 3 Pin, V, M	2422 025 17103
1682	Connector, V, 10 Pin,, F	2422 025 16729
1683	Connector, V, 5 Pin, F	2422 025 16793
1702	Ceramic Resonator, 12MHz,, CSTCV	2422 540 98456
2001	Cap, 33p, 5%, 50V, Ceramic	3198 016 33390
2002	Cap, 27p, 5%, 50V, Ceramic	3198 016 32790
2003	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2004	Cap, 220n, +80/-20%, 16V, Ceramic.	3198 017 42240
2005	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2006	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2007	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2008	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2010	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2011	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2012	Cap, 47p, 5%, 50V, Ceramic	3198 016 34790
2013	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2016	Cap, 100u, 20%, 16V, Electrolytic.	3198 030 41010
2017	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2019	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2020	Cap, 220p, 5%, 50V, Ceramic.	3198 016 32210
2022	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2023	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2024	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2025	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16V, Ceramic	3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2029 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2033 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2034 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2035 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2036 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2037 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2038 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2039 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2040 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2052 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2053 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2054 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2055 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2056 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2057 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2100 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2108 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2109 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2110 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2111 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2112 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 10n, 10%, 50V, Ceramic. 3198 017 01030
2312 Cap, 33n, 5%, 50V, Ceramic 2020 552 96659
2312 Cap, 33n, 5%, 16v, Ceramic 2222 781 11569
2340 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2342 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2351 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2356 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 3n3, 10%, 50V, Ceramic. 3198 017 33320
2361 Cap, 1p2, 21%, 50V, Ceramic. 3198 016 31280
2362 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2372 Cap, 1u, +80/-20%, 16V, Ceramic. 3198 017 21050
2373 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2374 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2375 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2376 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2377 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2378 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2384 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2388 Cap, 33n, 10%, 16V, Ceramic. 3198 017 33330
2389 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2390 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2391 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2394 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2395 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2396 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2397 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2399 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2401 Cap, 10n, 10%, 50V, Ceramic. 3198 017 31030
2404 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2405 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2413 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2418 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2420 Cap, 150p, 5%, 50V, Ceramic. 3198 016 31510
2422 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2425 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2501 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2502 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2503 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2504 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2505 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2506 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2507 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2508 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2510 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2511 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2512 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2513 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2515 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2520 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2521 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2522 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2523 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2524 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2525 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2526 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2528 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2529 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2530 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2549 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2550 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2552 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2553 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2554 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2555 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2562 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2563 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2564 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2565 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2566 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2567 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2568 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2569 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2570 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2571 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2574 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2575 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2576 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2577 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2578 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2579 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2582 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2583 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2584 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2585 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2586 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2590 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2592 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2593 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2594 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2595 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2609 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2610 Cap, 2n2, 10%, 50V, Ceramic. 3198 017 32220
2611 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2632 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2634 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2640 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2643 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2644 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2645 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2646 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2649 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2651 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2652 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2653 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2654 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2659 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2660 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2661 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2662 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2663 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2664 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2665 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2666 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2667 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2668 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2670 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2673 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2674 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2677 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2678 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2679 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2680 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2681 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2682 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2686 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2687 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2690 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2691 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2693 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2694 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2695 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2697 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2698 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2709 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2710 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2711 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2712 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2713 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2714 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2716 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2718 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590

S = Safety Part Be sure to use exact replacement part.

2719 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2720 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2721 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2722 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2728 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2729 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2730 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2731 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2740 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2741 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2742 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2743 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2744 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2745 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2746 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2747 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2748 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2749 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2750 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2751 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2763 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2765 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2766 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2767 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2768 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2771 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2772 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2774 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2776 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2777 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2778 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2779 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2780 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2781 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2782 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2784 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2785 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2786 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2787 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2788 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2789 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2790 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2791 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2792 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2793 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2794 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2795 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2796 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2797 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2798 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2799 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2800 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2801 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2802 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2803 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2805 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2807 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2809 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2810 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2811 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2812 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2813 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2817 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2819 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2820 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2821 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2826 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2829 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2831 Cap, 68p, 5%, 50V, Ceramic 3198 016 36890
2832 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2833 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2835 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2836 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2838 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2843 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2845 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2846 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2847 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2848 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2851 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2859 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2861 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2864 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2865 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2866 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2867 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2870 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2871 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2872 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2874 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2875 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2876 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2880 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2881 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2884 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2899 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2908 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2909 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2910 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2911 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2912 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
3001 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3002 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3003 Res, 24K, 1%, 1/16W, Metalized Glass . . 2322 704 62403
3006 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3007 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3008 Res, Network, 4x220 ohm, 5%. 3198 031 12210
3009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3011 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3012 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3013 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3014 Res, 6K8, 5%, 1/16W, Metalized Glass . . 3198 021 36820
3015 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3016 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3017 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3018 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3019 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3020 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3021 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3024 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3025 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3026 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3027 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3029 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3031 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3033 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3034 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3035 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3039 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3040 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3041 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3042 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3044 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3045 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3046 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3048 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3049 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3050 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3051 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3052 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3053 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3054 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3055 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3056 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3057 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2120 108 93902
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2322 704 66201
3061 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3062 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3064 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3065 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3066 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3067 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3068 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3069 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3074 Res, Network, 4x470 ohm, 5%. 3198 031 14710

S = Safety Part Be sure to use exact replacement part.

3076 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3078 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3079 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3080 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3081 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3088 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3090 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3093 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3094 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3095 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3096 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3097 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3098 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3099 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3169 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3170 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3171 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3172 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3173 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3174 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3176 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3180 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3181 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3182 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3183 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3184 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3185 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3186 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3187 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3188 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3189 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3304 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3308 Res, 470K, 5%, 1/10W, Metalized Glass. . 3198 021 54740
3324 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3329 Res, 6R8, 5%, 1/8W, Metalized Glass. . . 2322 750 66808
3330 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3332 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3335 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3355 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3360 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3370 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3371 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3372 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3376 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3377 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3378 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3382 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3385 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3387 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3393 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3395 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3396 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3397 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3398 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3400 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3401 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3402 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3403 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3404 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3405 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3408 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3415 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3418 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3419 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3420 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3436 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3437 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3439 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3441 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3444 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3446 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3447 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3448 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3449 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3456 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3457 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3463 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3467 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3470 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3471 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3473 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3500 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3501 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3504 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3505 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3506 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3509 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3510 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3511 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3512 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3513 Res, 270K, 5%, 1/16W, Metalized Glass. . 2322 702 60274
3514 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3515 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3516 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3519 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3521 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3522 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3523 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3524 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3525 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3526 Res, 1M, 5%, 1/16W, Metalized Glass. . . 3198 021 31050
3527 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3529 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3530 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3531 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3532 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3533 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3540 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3546 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3554 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3558 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3559 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3560 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3561 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3562 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3563 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3564 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3567 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3570 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3571 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3572 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3573 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3574 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3575 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3576 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3577 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3578 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3579 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3614 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3615 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3624 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3626 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3627 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3628 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3630 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3634 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3636 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3637 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3639 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3640 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3641 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3642 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3643 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3644 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3653 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3654 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3658 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3666 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3667 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3668 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3669 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3670 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3671 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3693 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3698 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3699 Res, 180K, 5%, 1/16W, Metalized Glass. . 2322 702 60184
3709 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3710 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3711 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3712 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3713 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3714 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3715 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3716 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3717 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3718 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3719 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3720 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3725 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3726 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3727 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3728 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3730 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3736 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3737 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020

S = Safety Part Be sure to use exact replacement part.

3738 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3739 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3740 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3741 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3742 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3744 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3745 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3746 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3747 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3748 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3749 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3750 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3751 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3752 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3753 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3754 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3755 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3756 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3757 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3758 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3759 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3762 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3763 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3764 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3771 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3772 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3773 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3774 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3781 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3782 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3783 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3792 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3793 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3794 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3795 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3804 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
5150 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5151 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5152 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5153 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5154 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5155 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5305 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5306 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5307 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5308 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5309 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5310 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5311 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5402 Coil, 8u2. . . . . 3198 018 38280
5404 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5405 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5406 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5408 IND VAR SM 5CCB 91MHZ PM R 2422 549 44875
5409 IND FXD 0603 EMI 100MHZ 120R R 2422 549 42893
5409 Inductor, Fixed, 100MHz, 120R 2422 549 42896
5411 Coil, 330n 3198 018 33370
5415 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5416 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5417 Coil, 33u. 3198 018 33390
5651 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5652 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5653 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5654 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5655 Coil, 22u. 3198 018 32290
5656 Coil, 6u8. . . . . 3198 018 36880
5657 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5658 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5659 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5660 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5661 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5662 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5663 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5664 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5665 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5666 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5667 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5668 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5669 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5670 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5671 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5672 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5706 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5707 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5710 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5711 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5712 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5713 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5714 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5716 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5717 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5718 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5719 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5721 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5722 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5724 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5726 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5727 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5728 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5729 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5731 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5736 Coil, 6u8. . . . . 3198 018 36880
5737 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5738 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5742 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5743 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5744 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5900 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5901 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5902 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5903 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5904 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5910 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5911 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5912 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5913 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5914 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5915 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5917 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5918 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5919 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5920 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
6001 Diode, Signal, BAT54 . . . . . 3198 010 10660
6002 Diode, Signal, BAS316. . . . . 3198 010 10630
6003 Diode, Signal, BAT54 . . . . . 3198 010 10660
6004 Diode, Signal, BAT54 . . . . . 3198 010 10660
6005 Diode, Regulator, PLVA2650A. 9340 309 70215
6320 Diode, Signal, BAS316. . . . . 3198 010 10630
6321 Diode, Signal, BAS316. . . . . 3198 010 10630
6322 Diode, Signal, BAS316. . . . . 3198 010 10630
6652 Zener Diode, 10V 3198 020 51090
6657 Zener Diode, 2.7 volt. 9340 548 43115
6658 Diode, Signal, BAS316. . . . . 3198 010 10630
6926 Zener Diode, 8.2V. 3198 020 58280
6956 Zener Diode, 8.2V. 3198 020 58280
6957 Zener Diode, 8.2V. 3198 020 58280
7001 IC, TV System Controller, QFP120, SAA5801 H/015. . . . . 9352 684 81557
7002 Transistor, NPN, BC857BW 3198 010 42320
7003 Transistor, NPN, BC847BW 3198 010 42310
7004 Transistor, NPN, BC847BW 3198 010 42310
7005 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7006 IC, CMOS Flash Memory, TC58FVM5T2ATG65 . 9322 194 83671
7007 IC, CMOS 16 Bit Dynamic RAM, MSM51V18165F 9322 157 20668
7007 IC, CMOS 16-Bit Dynamic RAM, IS41LV16100 9322 200 55668
7008 Transistor, NPN, BC847BW 3198 010 42310
7009 Transistor, NPN, BC847BW 3198 010 42310
7010 Transistor, NPN, BC857BW 3198 010 42320
7011 IC, M24C32-WMN6. . . . . 9322 124 74668
7013 Transistor, NPN, BC847BW 3198 010 42310
7014 Transistor, NPN, BC857BW 3198 010 42320
7015 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7016 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7100 IC, 3.3V Prog. LVDS Transmitter, DS90C385 9322 159 45668
7305 Transistor, NPN, BC847BW 3198 010 42310
7312 Transistor, NPN, PDTC144EU 3198 010 44330
7320 Transistor, NPN, BC847BW 3198 010 42310
7322 Transistor, NPN, BC847BW 3198 010 42310
7323 IC, IIC-Bus Controlled TV Processor. . . 9352 625 24518
7375 Transistor, NPN, BC847BW 3198 010 42310
7402 Transistor, NPN, BC847BW 3198 010 42310
7404 Transistor, NPN, BC847BW 3198 010 42310
7408 Transistor, PNP, BC857B. 3198 010 42150
7409 Transistor, PNP, BC857B. 3198 010 42150
7410 Transistor, NPN, BC847BW 3198 010 42310
7411 Transistor, NPN, BC847B. 3198 010 42030
7651 IC, Multi-standard Sound Processor, MSP34 21G. 9322 183 23671
7654 Transistor, NPN, BC847BS 9340 425 20115
7664 Transistor, NPN, BC847BPN. 9340 425 30115
7665 Transistor, NPN, BC847BPN. 9340 425 30115
7666 Transistor, NPN, BC847BPN. 9340 425 30115
7668 Transistor, NPN, BC857BW 3198 010 42320
7674 Transistor, NPN, BC847BW 3198 010 42310
7675 Transistor, NPN, BC847BS 9340 425 20115
7678 Transistor, NPN, BC847BS 9340 425 20115
7679 Transistor, NPN, BC847BS 9340 425 20115
7681 IC, LP/LN Operational Amplifier. 9322 060 73668
7682 Transistor, NPN, BC847B. 3198 010 42030
7706 IC, Digital, LF25CDT 9322 142 88668
7706 IC, Voltage Regulator w/Inhibit. 9322 164 71668
7707 Transistor, NPN, BC847B. 3198 010 42030

S = Safety Part Be sure to use exact replacement part.

7708 Transistor, NPN, BC847B. 3198 010 42030
7709 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 IC Socket, 32 Pin, V, F. 2422 486 80938
7711 IC, 512 Kbit EPOM, M27C512 . . . . . 9322 127 85668
7712 IC, Octal D-type Transparent Latch . . . 9351 870 00118
7713 IC, PICNIC, SAA4978H 9352 688 09557
7714 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7715 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7717 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7718 IC, Field/Line Rate Converter, SAA4993H. 9352 695 58557
7719 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7722 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7723 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7724 IC, EAGLE - Video Enhancment Processor, T 8F24EF 9322 188 08702
7725 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7726 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7727 IC, Low Drop Volt. Reg. w/Inhibit, LF15AB DT. 9322 170 14668
7734 IC, Inverter, LVLP, 74LVC1G04. . . . . 3198 010 70390
7735 IC, D-type flip-flop, 74LVC1G79. . . . . 9352 686 75125
9008 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9010 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9011 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9012 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9013 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9014 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9302 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9313 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9322 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9401 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9403 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9406 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9407 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9410 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9413 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9414 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9416 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9417 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9520 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9522 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9603 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9604 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9610 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9611 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9632 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9642 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9645 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9676 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9677 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9682 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9683 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9686 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9687 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9691 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9702 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9703 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9704 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9712 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9714 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9716 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9717 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9718 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9719 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9721 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9723 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9725 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9729 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9731 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9733 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9735 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9739 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9740 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9741 Res, Network, 4x10 ohm, 5% 3198 031 11090
9744 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9754 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9760 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9761 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9763 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9764 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9768 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9769 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9901 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9902 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9903 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9904 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9905 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9906 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9907 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9908 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9909 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9919 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9920 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9921 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9925 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9927 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9928 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9929 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9935 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9937 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9938 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9939 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9944 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9945 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9946 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9947 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9948 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9949 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9950 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9951 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9952 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9953 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9954 Res, Zero ohm, 'Chip' Jumper 3198 021 90030

Scaler Board MSB Panel

Scaler Board MSB Panel
0300 Connector, 64 Pin, BM, M 2422 025 17714
0303 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0305 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0308 Phono Jack Board, 4 Plugs, Red & White . 2422 026 05422
0310 Sub-D Connector, 15 Pin, BM, F 2422 025 17027
0311 Phono Jack Board, 6 Plugs, Red , Blue, Gr eent 2422 026 05421
0315 Connector, 5 Pin, M, IDE 2422 025 17931
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Connector, 4 Pin 2422 025 12479
1105 Connector, 10 Pin, V, M. 2422 021 98888
1106 Connector, 10 Pin, V, M. 2422 021 98888
1152 Scaler Board MSB Panel Assembly. 3122 357 22272
1300 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1301 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1302 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1303 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1401 Connector, V, 10 Pin,, F 2422 025 16729
1501 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1502 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1503 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1504 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1505 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1700 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1701 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1702 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1703 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2108 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2109 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2110 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2111 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2121 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2122 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2138 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2139 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2151 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2152 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2153 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2154 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2155 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2156 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2157 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2158 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2159 Cap, 4p7, 5%, 50V, Ceramic 3198 016 34780
2160 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090

S = Safety Part Be sure to use exact replacement part.

2161 Cap, 100u, 20%, 6.3V, Electrolytic . . . 2020 012 93793
2170 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2171 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2172 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2173 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2174 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2175 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2176 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2177 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2178 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2179 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2180 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2181 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2182 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2183 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2184 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2185 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2186 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2187 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2188 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2189 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2190 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2191 Cap, 68n, 10%, 16V, Ceramic. 3198 017 36830
2192 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2194 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2195 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2196 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2197 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2198 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2199 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2200 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2225 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2226 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2227 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2228 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2229 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2230 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2231 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2232 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2233 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2234 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2235 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2236 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2237 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2238 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2240 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2241 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2242 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2243 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2244 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2245 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2246 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2247 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2248 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2249 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2255 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2260 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2261 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2262 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2263 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2267 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2295 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2296 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2297 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2298 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2299 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2300 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2304 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2305 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2306 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2307 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2308 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2309 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2311 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2312 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2314 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2315 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2316 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2317 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2318 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2319 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2320 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2321 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2322 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2323 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2345 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2346 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2347 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2348 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2349 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2354 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2355 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2359 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2360 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2361 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2362 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2363 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2364 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2372 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2373 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2374 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2375 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2377 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2378 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2379 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2380 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2381 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2382 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2383 Cap, 3n9, 10%, 50V, Ceramic. 2020 552 96428
2384 Cap, 39n, 10%, 50V, Ceramic. 2238 580 15644
2385 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2386 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2405 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2406 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2408 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2409 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2413 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2414 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2415 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2416 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2417 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2418 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2419 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2420 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2421 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2423 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2431 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2432 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2433 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2434 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2435 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2437 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2438 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2439 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2440 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2441 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2443 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2444 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2445 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2446 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2447 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2448 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2492 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2493 Cap, 1u, +80/-20%, 10V, Ceramic. 3198 017 41050
2494 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2495 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2497 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2502 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2535 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2536 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2538 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2539 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2540 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2541 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2542 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2543 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2550 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2582 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2583 Cap, 270p, 5%, 50V, Ceramic. 3198 016 32710
2584 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2585 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2586 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2587 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2588 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2590 Cap, 470p, 2%, 50V, Ceramic. 2238 867 14471
2593 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2594 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2595 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2596 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2598 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2599 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2600 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2633 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2634 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2635 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2659 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2660 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2664 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2665 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2666 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2667 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2669 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2670 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2671 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2672 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2710 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2712 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2713 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2714 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2715 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2716 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2718 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2720 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2722 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2724 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2725 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2726 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2727 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2730 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2736 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2737 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2759 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2766 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2767 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2771 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2772 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2780 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2781 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2790 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2820 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2821 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 1n5, 10%, 50V, Ceramic. 3198 017 31520
2826 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2827 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2830 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2831 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2832 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2833 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2850 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2851 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2852 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2855 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2856 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2861 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2862 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2863 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2870 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2871 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2882 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2883 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2886 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2888 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2897 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710

3106 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3107 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3108 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3109 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3110 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3111 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3112 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3113 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3114 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3115 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3116 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3120 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3121 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3122 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3123 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3124 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3134 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3135 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3137 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3138 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3139 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3151 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3152 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3153 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3156 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3157 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3158 Res, 75 ohm, 5%, 1/16W, Metalized Glass. 3198 021 37590
3173 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3175 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3176 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3180 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3181 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3182 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3183 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3184 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3185 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3186 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3187 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3188 Res, 68 ohm, 5%, 1/16W, Metalized Glass. 3198 021 36890
3198 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3220 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3221 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3260 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3261 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3262 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3263 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3264 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3265 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3266 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3302 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3303 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3304 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3306 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3345 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3346 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3347 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3348 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3349 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3350 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3351 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3352 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3405 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3406 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3407 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3408 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3409 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3410 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3411 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3413 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3414 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3415 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3416 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3420 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3422 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3423 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3425 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3426 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3427 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3428 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3434 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3435 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3436 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3437 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3438 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3440 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3441 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3444 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3445 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3447 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3448 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3449 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030

S = Safety Part Be sure to use exact replacement part.

3450 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3451 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3452 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3455 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3456 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3484 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3485 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3486 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3487 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3488 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3489 Res, 4R7, 5%, 1/16W, Metalized Glass . . 3198 021 34780
3490 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3492 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3497 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3498 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3499 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3500 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3505 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3506 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3507 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3508 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3511 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3512 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3535 Res, Network, 4x47 ohm, 5% 3198 031 14790
3536 Res, Network, 4x47 ohm, 5% 3198 031 14790
3537 Res, Network, 4x47 ohm, 5% 3198 031 14790
3538 Res, Network, 4x47 ohm, 5% 3198 031 14790
3539 Res, Network, 4x47 ohm, 5% 3198 031 14790
3540 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3541 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3542 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3543 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3544 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3581 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3582 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3583 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3584 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3585 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3586 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3587 Res, 47K, 1%, 1/16W, Metalized Glass . . 2322 704 64703
3588 Res, 330K, 5%, 1/16W, Metalized Glass. . 3198 021 33340
3589 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3590 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3591 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3593 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3595 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3597 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3598 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3599 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3603 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3604 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3605 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3606 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3630 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3631 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3633 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3634 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3635 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3636 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3649 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3651 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3653 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3654 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3666 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3667 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3668 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3669 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3670 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3673 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3674 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3675 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3676 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3677 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3710 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3711 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3713 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3714 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3715 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3716 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3717 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3718 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3720 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3721 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3722 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3725 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3726 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3727 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3730 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3731 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3732 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3733 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3745 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3746 Res, Network, 4x47 ohm, 5% 3198 031 14790
3747 Res, Network, 4x47 ohm, 5% 3198 031 14790
3748 Res, Network, 4x47 ohm, 5% 3198 031 14790
3749 Res, Network, 4x47 ohm, 5% 3198 031 14790
3750 Res, Network, 4x47 ohm, 5% 3198 031 14790
3751 Res, Network, 4x47 ohm, 5% 3198 031 14790
3752 Res, Network, 4x47 ohm, 5% 3198 031 14790
3753 Res, Network, 4x47 ohm, 5% 3198 031 14790
3754 Res, Network, 4x47 ohm, 5% 3198 031 14790
3755 Res, Network, 4x47 ohm, 5% 3198 031 14790
3756 Res, Network, 4x47 ohm, 5% 3198 031 14790
3757 Res, Network, 4x47 ohm, 5% 3198 031 14790
3758 Res, Network, 4x47 ohm, 5% 3198 031 14790
3760 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3761 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3767 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3768 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3769 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3770 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3777 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3779 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3781 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3782 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3790 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3792 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3797 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3798 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3799 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3801 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3820 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3821 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3826 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3828 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3829 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3830 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3831 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3832 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3850 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3851 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3856 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3858 Res, 1K5, 1%, 1/16W, Metalized Glass . . 2322 704 61502
3860 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3861 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3862 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3870 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3871 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3872 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3873 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3999 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
4105 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4106 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4110 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4111 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4267 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4349 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4485 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4650 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4778 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4780 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4793 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4890 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
4891 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4892 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5107 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5160 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5164 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5165 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5166 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5170 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5195 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5225 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5240 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5255 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5260 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5295 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5296 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5297 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5345 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5346 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5347 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5348 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5405 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5406 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5408 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5411 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769

S = Safety Part Be sure to use exact replacement part.

5486 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5488 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5535 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5536 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5539 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5581 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5582 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5583 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5584 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5585 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5633 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5710 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5711 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5712 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5715 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5724 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5746 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5747 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5749 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5751 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5780 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5830 Coil, 22u. 2422 535 95278
5860 Coil, 22u. 2422 535 95278
5890 Coil, 22u. 2422 535 95278
5892 Coil, 22u. 2422 535 95278
6220 Diode, Signal, BAV99 . . . . . 3198 010 10620
6221 Diode, Signal, BAV99 . . . . . 3198 010 10620
6405 Diode, Signal, BAT54 . . . . . 3198 010 10660
6485 Diode, Signal, BAT54 . . . . . 3198 010 10660
6581 Diode, Signal, BAS316. . . . . 3198 010 10630
6630 Zener Diode, 6.8V. 3198 020 56880
6631 Zener Diode, 6.8V. 3198 020 56880
6632 Zener Diode, 6.8V. 3198 020 56880
6633 Zener Diode, 33V 3198 020 53390
6634 Zener Diode, 33V 3198 020 53390
6635 Zener Diode, 33V 3198 020 53390
6636 Zener Diode, 33V 3198 020 53390
6637 Zener Diode, 6.8V. 3198 020 56880
6638 Zener Diode, 6.8V. 3198 020 56880
6639 Zener Diode, 6.8V. 3198 020 56880
6640 Zener Diode, 6.8V. 3198 020 56880
6641 Zener Diode, 6.8V. 3198 020 56880
6642 Zener Diode, 6.8V. 3198 020 56880
6643 Zener Diode, 6.8V. 3198 020 56880
6710 Zener Diode, 6.8V. 3198 020 56880
6711 Zener Diode, 6.8V. 3198 020 56880
6712 Zener Diode, 6.8V. 3198 020 56880
6745 Diode, Signal, BAV99 . . . . . 3198 010 10620
6746 Diode, Signal, BAV99 . . . . . 3198 010 10620
6747 Diode, Signal, BAV99 . . . . . 3198 010 10620
6748 Diode, Signal, BAV99 . . . . . 3198 010 10620
6749 Diode, Signal, BAV99 . . . . . 3198 010 10620
6750 Diode, Signal, BAV99 . . . . . 3198 010 10620
6751 Zener Diode, 6.8V. 3198 020 56880
6752 Zener Diode, 6.8V. 3198 020 56880
6753 Diode, Signal, BAV99 . . . . . 3198 010 10620
6754 Diode, Signal, BAV99 . . . . . 3198 010 10620
6755 Diode, Signal, BAS316. . . . . 3198 010 10630
6756 Diode, Signal, BAS316. . . . . 3198 010 10630
6757 Zener Diode, 33V 3198 020 53390
6758 Zener Diode, 33V 3198 020 53390
6759 Zener Diode, 33V 3198 020 53390
6760 Zener Diode, 33V 3198 020 53390
6761 Zener Diode, 6.8V. 3198 020 56880
6820 Diode, Signal, BAS316. . . . . 3198 010 10630
6830 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
6850 Diode, Signal, BAS316. . . . . 3198 010 10630
6860 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
7107 IC, 2 Ch. IIC Multiplexer, PCA9540 . . . 9352 666 74118
7120 IC, Prog. Gate Array, EP1C6Q240C8. . . . 9322 196 44671
7137 IC, Volt Det. w/Prog. Delay, NCP303LS09. 9322 186 29685
7160 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7170 IC, 140 MSPS Analog Interface, AD9883A . 9322 181 72671
7195 IC, 100 MSPS, 3V A/D Converter, AD9283 . 9322 197 13668
7255 IC, Serial Conf. Flash Memory, 1Mbit, EPC S1. . . . . 9322 196 51682
7260 IC, Serial Conf. f/APEX & FLEX Dev., EPC2 9322 141 53682
7295 IC, Digital Transmitter, SII160CT100 . . 9322 171 04671
7345 IC, 205 MSPS Analog FP Interface, AD9888 9322 179 30671
7346 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7347 IC, Quad Buffer/Driver, 74LVC125AD . . . 9352 317 00118
7405 IC, M24C32-WMN6. . . . . 9322 124 74668
7406 IC, 64k x 16-bit Static RAM, CY62126BV . 9322 164 75682
7407 IC, PW181 Image Processor, PW181-10Q . . 9322 184 01671
7409 IC, 16Mbit, 3V Flash Memory, M29W160ET . 9322 194 74668
7411 Crystal Oscillator, 14.31818MHz, FXO-34FL 2722 171 08787
7484 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7486 Transistor, NPN, BC847BW 3198 010 42310
7487 Transistor, NPN, BC847BW 3198 010 42310
7490 Transistor, NPN, BC847BW 3198 010 42310
7491 Transistor, NPN, BC847BW 3198 010 42310
7494 IC, Prog. Shunt Volt. Ref., TS431. . . . 9322 192 16685
7537 IC, LVDS Receiver to 24bit Conv., DS90CF386. . . . . 9322 164 41668
7581 IC, Dual Retrig. Mono Multivibrator, 74HCT4538. . . . . 9337 153 90118
7582 Transistor, NPN, BC847BW 3198 010 42310
7583 IC, Video Sync Separator, LM188. . . . . 9322 005 78668
7589 IC, Triple 2 Ch. Analog Multiplex/Demultiplexer 9337 153 20118
7592 IC, Ultra Fast Comparator, TL3016. . . . 9322 125 63668
7593 IC, Hex Inverting Schmitt-trigger, 74LVC14A. 9352 607 39118
7594 Transistor, NPN, BC847BW 3198 010 42310
7633 IC, Serial EEPROM. 9322 046 99668
7710 IC, Wide Band Analog Switch, M52758FP. . 9322 185 90668
7715 Transistor, NPN, BC847BW 3198 010 42310
7716 Transistor, NPN, BC847BW 3198 010 42310
7717 Transistor, NPN, BC847BW 3198 010 42310
7725 Transistor, NPN, BC847BW 3198 010 42310
7746 IC, HDCP PanelLink Receiver, SII169CT100 9322 185 79668
7747 IC, Serial EEPROM. 9322 046 99668
7749 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7750 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7820 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7830 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7850 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7860 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7870 IC, Adj. Pos. Volt. Reg., LD1117DT . . . 9322 144 97668

Cabinet & Accessory Parts

0005 System Cooling Fan Assembly. 3135 037 71361
0006 Housing, Control (EPIC). 3135 037 72911
0009 Cable, Thermal Sw. 2 Pin, 600mm. 3135 038 70071
0010 Roller Switch, f/Light Engine Lamp Door. 3135 038 40011
0016 Lamp, Light Engine 3122 438 71310
0017 Light Engine Asm., 1.18", D45, XION 1.05 3122 437 11432
0018 Bracket, Light Engine. 3135 034 01923
0019 Screen Lenticular, 44W LCOS. 3135 033 20781
0020 Screen, Fresnel, 44W LCoS. 3135 033 20291
0021 Mirror, 44W LCoS 3135 034 90111
0022 Screen Protector, EPIC 44W 3135 034 02802
0023 Shield, Light. 3135 034 04241
0024 Stud, Adjusting, f/Light Engine (3 used) 3135 030 40281
0025 Bracket, Adjust. 3135 031 10021
0030 Cabinet Front Asm., LCoS 44W Asm.. . . . 3135 037 51562
0032 Cabinet Top, 44W, EPIC 3135 037 52972
0034 Upper Backcover. 3135 037 51533
0036 Lower Backcover. 3135 037 51523
0038 Cabinet Base 3135 034 01405
0039 Baffle, Speaker, 44W Asm.. . . . . 3135 037 52011
0069 Label, Center Channel Switch 3135 037 52153
0075 Vertical Rail, Left Side, 44W LCoS . . . 3135 031 20293
0076 Vertical Rail, Right Side, 44W LCoS. . . 3135 031 20303
0077 Rail, Screen, Horizontal, LCoS 44W . . . 3135 031 20282
0078 Support Bracket, Mirror Top (2 used) . . 3135 034 01501
0079 Support Bracket, Mirror Right. 3135 034 01511
0080 Support Bracket, Mirror Left 3135 034 01521
0090 Bracket Left, Cabinet Support. 3135 031 20274
0091 Bracket Right, Cabinet Support 3135 031 20264
0092 Rail Support Bracket 3135 031 20412
0093 Support, Back. 3135 034 01421
0094 Duct, Lamp Back. 3135 034 01432
0095 Duct, Lamp Front 3135 034 01441
0096 Door, Lamp Access. 3135 034 01492
0098 Filter Assembly. 3135 037 51811
0106 Rail, System Asm. Left 3135 031 20332
0107 Rail, System Asm. Right. 3135 031 20342
0126 Barrier, Light Housing 3135 034 01861
0127 Bracket, Side Jack Panel 3135 037 51616
0132 Frame, f/LED Sensor Panel. 3135 034 01872
0144 Cup, Mountiing (2 used). 3135 030 40151
0145 Cup, Mountiing (2 used). 3135 030 40151
0150 Cooling Fan - 12 VDC 3135 038 70051
0167 Documentation, Quick Use Guide, English. 3135 035 21292
0168 Documentation, Owner's Manual, English . 3135 035 21303
0193 Option Code Lable, LCoS. 3135 035 21852
0323 Washer, Flat, f/Light Eng. Adj. Studs (6 used). 3135 030 40171
0324 Nut, M5, f/Light Eng. Adj. Studs (3 used) 3135 030 40181
1085 Remote Traansmitter, RC2043/01B. 3128 147 13203
5213 Speaker, 8 ohm, 25W, Woofer (2 used). . 2422 264 00463
5214 Speaker, 8 ohm, 25W, Twetter (2 used). . 2422 264 00464
S 8190 Mainscord, USA, 7A, 2M4, VH BK 2422 070 98164
8610 Cable, DVI-D/450/DVI-D 3135 031 02121

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-10-2004
Rev. Date: 08-10-2004
Print Date: 2004-08-10

Return to Index

PARTS LIST
55PL9524

Lamp Driver Panel Parts

3D Comb Filter Panel Parts
Main Power Panel Parts
Rear Jack Panel Parts
System Panel Parts
LED Sensor Panel Parts
Side Jack Panel Parts
LED/Keyboard Panel Parts
Thermal Sensor Panel Parts
Input Power Panel Parts
Audio Amp Panel Parts
DW PIP Panel Parts
SSB Panel Parts
Scaler Board MSB Panel Parts
Cabinet & Accessory Parts

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LAMP DRIVER PANEL

LAMP DRIVER PANEL
LAMP DRIVER PANEL. 9137 001 77405

3D Comb Filter Panel Parts

3D Comb Filter Panel Parts
1153 3D Comb Panel Asm. 3135 037 10261
0001 Shield, Bottom 3135 031 20101
0002 Shield, Top. 3135 031 20092
1001 Resonator, Crystal, 20MHz 2422 543 01273
1008 Connector, 9 Pin 2422 025 17802
1009 Connector, 9 Pin 2422 025 17802
2000 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2001 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2002 Cap, 47u, 20%, 20v, Electrolytic 3198 032 58170
2003 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2004 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2005 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2006 Cap, 47u, 20%, 20v, Electrolytic 3198 032 58170
2008 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2009 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2010 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2011 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2012 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2013 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2014 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2015 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2016 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2017 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2018 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2019 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2020 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2021 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2022 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2023 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2024 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2030 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2032 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2033 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2034 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2035 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2036 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2037 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2041 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2042 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2043 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2044 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2045 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2046 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2047 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2048 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2049 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2051 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2052 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2053 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2054 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2055 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2056 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2057 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2059 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2061 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2062 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2063 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2064 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2065 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2066 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2067 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2068 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2069 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2070 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
3000 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3001 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3002 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3003 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3004 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3005 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3006 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3007 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3008 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3009 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3010 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3011 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3012 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3013 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3014 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3015 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3016 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3017 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3018 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3019 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3020 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3021 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3022 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3023 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3024 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3025 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3026 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3027 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3028 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3029 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3030 Res, 820 ohm, 5%, 1/16W, Metalized Glass 3198 021 38210
3031 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3032 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3033 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3034 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3035 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3036 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3037 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3038 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3039 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3040 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3041 Res, 820 ohm, 5%, 1/16W, Metalized Glass 3198 021 38210
3042 Res, 3K3, 1%, 1/16W, Metalized Glass . . 2322 704 73302
3043 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3044 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3055 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3056 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3057 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3058 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3059 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3060 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3061 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3065 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3067 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3068 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3069 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3071 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3072 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3074 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3076 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3077 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3082 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3083 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3085 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3088 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3089 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3091 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3095 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3096 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3097 Res, 1K8, 5%, 1/16W, Metalized Glass . . 3198 021 31820
3098 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3099 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3100 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3101 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3102 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3103 PTC, 6V, 1R3 . . . . . 2122 662 00139
3104 PTC, 6V, 1R3 . . . . . 2122 662 00139
3105 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
5000 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5001 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5003 Filter, Fixed, 14M3. . . . . 2422 549 44784
5004 Filter, Fixed, 14M3. . . . . 2422 549 44784
5005 Coil, 10u. 3198 018 41090
5006 Filter, Fixed, 14M3. . . . . 2422 549 44785
5007 Coil, 10u. 3198 018 41090
5008 Coil, 22u. 3198 018 72290
5009 Coil, 22u. 3198 018 72290
5010 Coil, 15u. 2422 535 94758
5011 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5012 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5013 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5014 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5015 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5017 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5019 Coil, 10u. 3198 018 41090
5020 Coil, 10u. 3198 018 41090
5021 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5022 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5024 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5025 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5027 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5028 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5029 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5030 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
6000 Diode, Signal, BAV99 . . . . . 3198 010 10620
6001 Diode, Signal, BAV99 . . . . . 3198 010 10620
6002 Diode, Signal, BAV99 . . . . . 3198 010 10620
6003 LED, VS, TLMH3100. . . . . 9322 072 71685

S = Safety Part Be sure to use exact replacement part.

6004	Diode, Rect, S1D.	9322 128 69685	
6005	Diode, Rect, S1D.	9322 128 69685	
6006	Diode, Signal, 1PS76SB10	9340 453 90115	
6007	Diode, Signal, BAS17	9335 262 30215	
7000	Transistor, NPN, BC847B.	9335 895 90215	
7001	Transistor, PNP, BC857B.	9335 897 60215	
7002	Transistor, NPN, BF570	9338 144 20215	
7003	Transistor, PNP, BC857B.	9335 897 60215	
7004	Transistor, NPN, BC847B.	9335 895 90215	
7005	Transistor, PNP, BC857B.	9335 897 60215	
7006	Transistor, NPN, BF570	9338 144 20215	
7007	Transistor, PNP, BC857B.	9335 897 60215	
7008	Transistor, NPN, BC847B.	9335 895 90215	
7009	Transistor, PNP, BC857B.	9335 897 60215	
7010	Transistor, NPN, BC847B.	9335 895 90215	
7011	Transistor, NPN, BC847B.	9335 895 90215	
7012	Transistor, PNP, BF550	9334 509 00215	
7015	Transistor, NPN, BC847B.	9335 895 90215	
7016	Transistor, PNP, BC857B.	9335 897 60215	
7017	Transistor, NPN, BC847B.	9335 895 90215	
7019	IC, LM809M3-3.08	9322 163 48668	
7020	Transistor, NPN, BC847B.	9335 895 90215	
7021	IC, LD1117DT33	9322 134 45668	
7022	IC, LD1117DT25	9322 160 50668	
7023	IC, UPD64083GF	9322 170 65671	

Main Power Panel Parts

Main Power Panel Parts

0218	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0219	Clip, Transistor	3135 011 02681	
0220	Spring Clip.	3139 121 24583	
0221	Spring Clip.	3139 121 24583	
0300	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0301	Clip, Transistor	3135 011 02681	
0302	Spring Clip.	3139 121 24583	
0305	Spring Clip.	3139 121 24583	
0306	Spring Clip.	3139 121 24583	
1206	Connector, 1 Pin	2422 015 18552	
1218	Heatsink	3135 031 60071	
1219	Heatsink, Dual TO-220.	3135 031 60133	
1300	Heatsink	3135 031 60071	
1302	Heatsink, Dual TO-220.	3135 031 60133	
1305	Heatsink, Dual TO-220.	3135 031 60133	
1311	Connector, 6 Pin, BM, V, M	2422 025 14044	
1312	Connector, 7 Pin	2422 025 11244	
1313	Connector, 8 Pin, BM, V, M	2422 025 10648	
1314	Connector, 9 Pin, BM, V, M	2422 025 12827	
1315	Connector, 10 Pin, BM, V, M.	2422 025 15085	
2220	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2221	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2222	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2223	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2226	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2233	Cap, 330p, 10%, 1KV, Ceramic	3198 019 63310	
2235	Cap, 1n, 10%, 1KV, Ceramic	3198 019 51020	
2236	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2237	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2238	Cap, 3300u, 20%, 16V, Electrolytic	2020 021 91816	
2239	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2240	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2241	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2243	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2244	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2245	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2246	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2247	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2265	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2310	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2312	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2320	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2321	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2323	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2333	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2335	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2336	Cap, 4n7, 10%, 400V, Metalized Polyester	2222 365 55472	
2337	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2338	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2339	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2340	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2341	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2342	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2343	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2344	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2345	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2347	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2348	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2349	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2350	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2351	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2352	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2353	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2354	Cap, 22u, 20%, 100V, Electrolytic.	2020 021 91813	
2355	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2356	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2357	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2358	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2360	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2361	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2362	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2363	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2364	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2365	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2366	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2367	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
3221	Res, 33K, 5%, 1W, Metal Film	3198 012 13330	
3222	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3223	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3224	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3226	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3227	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3228	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3229	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790	
3230	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3231	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3233	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080	
3237	Res, 10K7, 1%, 3/5W, Metal Film.	2312 915 11073	
3238	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3252	Res, 22 ohm, 1%, 3/5W, Metal Film.	2312 915 12209	
3253	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3254	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	
3255	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3256	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3257	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3259	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3260	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	
3321	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
3322	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3323	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3324	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3325	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3326	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3327	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3328	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	
3329	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	
3330	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	
3331	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710	
3332	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630	
3333	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	
3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3335	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3338	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3339	Res, 1K, 5%, 1 1/3W, Metal Film.	3198 012 21020	
3340	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
S 3341	Res, 680 ohm, 5%, 3W, Metal Film	3198 012 36810	
3342	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3343	Res, 1K8, 1%, 1/10W, Metalized Glass	2120 108 92618	
3344	Res, 750K, 1%, 3/5W, Metal Film.	2312 915 17504	
3345	Res, 27K, 1%, 1/8W, Metalized Glass.	2322 734 62703	
3346	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3347	Res, 10 ohm, 5%, 1W, Metal Film.	3198 012 11090	
3348	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3349	Res, 0R47, 5%, 3/5W, Metal Film.	3198 012 14770	
3350	Res, 8R2, 5%, 1/4W, Carbon Film.	2120 101 74828	
3351	Res, 0R1, 5%, 1 1/3W, Metal Film	3198 012 21070	
3352	Res, 2K7, 1%, 3/5W, Metal Film	2312 915 12702	
3353	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3354	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3355	Res, 150K, 5%, 1/6W, Carbon Film	3198 011 01540	
3356	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3357	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3358	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3359	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	
S 5201	Line Filter, 100uH, 2.2A	2422 549 44101	
5208	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5209	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5210	Switching Transformer, US28207-00.	2422 531 02555	
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5213	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5215	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5216	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5217	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5301	Line Filter, 100uH, 2.2A	2422 549 44101	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5308	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5309	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5310	Switching Transformer, US28212-02.	2422 531 02594	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	

S = Safety Part Be sure to use exact replacement part.

5316 Coil, 10u. 2422 535 94639
5317 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5318 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5319 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5320 Coil, 10u. 2422 535 94639
5321 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5322 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5323 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5324 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5325 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5326 Coil, 10u. 2422 535 95363
5327 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5328 Coil, 330u 2422 535 94863
6201 Diode, Rect, BY229X-800 . . . . . 9340 380 30127
6202 Zener Diode, 5.1 volt. 3198 010 55180
6202 Zener Diode, 5.1 volt. 3198 010 55180
6204 Diode, Rect., PBYR10100X. 9340 555 24127
6205 Diode, Rect, BYV95C 9335 001 80133
S 6207 IC, Optocoupler. 9338 941 50682
6209 Diode, Signal, BAV21 . . . . . 3198 010 10070
6301 Diode, Rect, BY229X-800 . . . . . 9340 380 30127
6305 Diode, Rect, BYV95C 9335 001 80133
6306 Diode, Signal, BAV21 . . . . . 3198 010 10070
S 6307 IC, Optocoupler. 9338 941 50682
6308 Zener Diode, 5.1 volt. 3198 010 55180
6309 Diode, Signal, BAV21 . . . . . 3198 010 10070
6312 Diode, Rect, SB360L-7024 . . . . . 9322 161 78682
6313 Diode, Rect, BYV95C 9335 001 80133
6314 Diode, Rect, BYW29EX-200. . . . . 9340 412 80127
6315 Diode, Rect., PBYR10100X. 9340 555 24127
6316 Diode, Rect, BYW95C-24. . . . . 9340 559 53112
7202 IC, PWM Off-line Switcher. 9322 166 44687
7203 Transistor, N Ch. FET, 2SK2886 . . . . . 9322 199 01687
7206 IC, Prog. Ref. Regulator 9322 115 98676
7209 IC, Prog. Ref. Regulator 9322 115 98676
7210 Transistor, PNP, BC557B. 3198 020 40110
7211 Transistor, NPN, BC547B. 3198 020 40030
7302 IC, PWM Off-line Switcher, TOP247Y . . . 9322 181 88687
7303 Transistor, N Ch. FET, 2SK2886 . . . . . 9322 199 01687
7304 IC, Prog. Ref. Regulator 9322 115 98676
7306 IC, Prog. Ref. Regulator 9322 115 98676
7307 IC, Inverting Step Switch Reg., MC34063A 9322 036 71682
7308 Transistor, P Ch. FET, 2SJ334. . . . . 9322 199 02687
7309 IC, Prog. Ref. Regulator 9322 115 98676
7310 Transistor, PNP, BC557B. 3198 020 40110
9001 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9012 Wire Jumper, 0.58MM. 3198 036 90010
9013 Wire Jumper, 0.58MM. 3198 036 90010
9014 Wire Jumper, 0.58MM. 3198 036 90010
9016 Wire Jumper, 0.58MM. 3198 036 90010
9017 Wire Jumper, 0.58MM. 3198 036 90010
9018 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9020 Wire Jumper, 0.58MM. 3198 036 90010
9024 Wire Jumper, 0.58MM. 3198 036 90010
9025 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9028 Wire Jumper, 0.58MM. 3198 036 90010
9029 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9317 Wire Jumper, 0.58MM. 3198 036 90010
9318 Wire Jumper, 0.58MM. 3198 036 90010
1010 Main Power Supply Panel Asm. 3135 037 10663

Rear Jack Panel Parts

Rear Jack Panel Parts
1016 Rear Jack Panel Asm. 3135 037 10692
1200 Connector, 4 Pin 2422 025 12479
1201 Connector, 4 Pin 2422 025 12479
1202 Connector, 4 Pin 2422 025 12479
1203 Connector, 4 Pin 2422 025 12479
1205 Connector, 3 Pin 2422 025 09191
1207 Connector, 5 Pin 2422 025 12481
1208 Connector, 5 Pin 2422 025 12481
1214 Socket, Cinch, 4 Pin 2422 026 05093
1217 Socket, Cinch, 1 Pin 2422 026 04378
1218 Socket, MDIN, 10 Pin 2422 026 04926
1219 Socket, MDIN, 10 Pin 2422 026 04926
1220 Connector, 64 Pin. 2422 025 17714
1251 Socket, Cinch, 12 Pin. 2422 026 05106
2111 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2112 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2113 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2114 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2115 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2116 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2117 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2118 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2119 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2120 Cap, 220p, 5%, 50v, Ceramic. 3198 016 02210
2121 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2122 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2123 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2124 Cap, 10u, 20%, 50v, Electrolytic 3198 029 51090
2149 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2150 Cap, 1u, +80/-20%, 16v, Ceramic. 3198 017 21050
2151 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2152 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2153 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2154 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2020 552 95499
2155 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2156 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2157 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2158 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2159 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2160 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2161 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2162 Cap, 1u, 20%, 50v, Electrolytic. 3198 025 51080
2163 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2164 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2165 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2166 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2167 Cap, 22u, 20%, 50v, Electrolytic 3198 025 52290
2168 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2169 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2170 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2171 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2173 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2174 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2175 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2176 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2177 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2178 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2180 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2181 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2182 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2183 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2184 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2185 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2186 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2187 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2188 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2189 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
3117 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3118 Res, 30K, 1%, 1/8W, Metalized Glass. . . 2322 734 63003
3119 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3120 Res, 51K, 1%, 1/8W, Metalized Glass. . . 2322 734 65103
3121 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3122 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3123 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3124 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3125 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3126 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3127 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3128 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3129 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3130 Res, 1 ohm, 5%, 1/10W, Metalized Glass . 3198 021 51080
3131 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3133 Res, 1K, 5%, 1/6W, Carbon Film 3198 011 01020
3134 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3136 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3137 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3139 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3140 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3141 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3142 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3143 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3144 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3145 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3146 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3155 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3156 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3157 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3158 Res, 1K2, 5%, 1/6W, Carbon Film. 3198 011 01220
3159 Res, 1K2, 5%, 1/6W, Carbon Film. 3198 011 01220
3160 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3161 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3162 Res, 1K2, 5%, 1/6W, Carbon Film. 3198 011 01220
3173 Res, 1K2, 5%, 1/6W, Carbon Film. 3198 011 01220
3174 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3175 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3176 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3181 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3182 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3183 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3184 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3185 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3186 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3187 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010

S = Safety Part Be sure to use exact replacement part.

3188 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3189 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3190 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3191 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3192 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3193 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3220 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3221 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3222 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3223 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3224 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3225 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3226 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3227 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3228 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3229 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3230 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3231 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3232 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3233 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3234 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3235 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3237 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3238 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3243 Res, 68 ohm, 5%, 1/10W, Metalized Glass. 3198 021 56890
3244 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3245 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3246 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3247 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3248 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
4000 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4004 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4005 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4006 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4007 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4008 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4009 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4010 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4011 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4012 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4013 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4014 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4015 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4016 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4017 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4018 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4019 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4020 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4021 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4022 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4023 Res, Zero ohm, "Chip" Jumper 3198 021 90020
6101 Zener Diode, 6.8 volt. 3198 020 56880
6102 Zener Diode, 6.8 volt. 3198 020 56880
6103 Zener Diode, 6.8 volt. 3198 020 56880
6104 Zener Diode, 6.8 volt. 3198 020 56880
6105 Zener Diode, 6.8 volt. 3198 020 56880
6106 Zener Diode, 6.8 volt. 3198 020 56880
6107 Zener Diode, 6.8 volt. 3198 020 56880
6108 Zener Diode, 6.8 volt. 3198 020 56880
6109 Zener Diode, 6.8 volt. 3198 020 56880
6110 Zener Diode, 6.8 volt. 3198 020 56880
6111 Zener Diode, 6.8 volt. 3198 020 56880
6112 Zener Diode, 6.8 volt. 3198 020 56880
6113 Zener Diode, 6.8 volt. 3198 020 56880
6114 Zener Diode, 6.8 volt. 3198 020 56880
6115 Zener Diode, 6.8 volt. 3198 020 56880
6116 Zener Diode, 6.8 volt. 3198 020 56880
6117 Zener Diode, 6.8 volt. 3198 020 56880
6118 Zener Diode, 6.8 volt. 3198 020 56880
6119 Zener Diode, 6.8 volt. 3198 020 56880
6120 Zener Diode, 6.8 volt. 3198 020 56880
6121 Diode, Signal, BAV99 . . . . . 9332 153 70215
6122 Diode, Signal, BAV99 . . . . . 9332 153 70215
6123 Diode, Signal, BAV99 . . . . . 9332 153 70215
6124 Diode, Signal, BAV99 . . . . . 9332 153 70215
6125 Diode, Signal, BAV99 . . . . . 9332 153 70215
6126 Diode, Signal, BAV99 . . . . . 9332 153 70215
6128 Diode, Signal, BAV99 . . . . . 9332 153 70215
6129 Diode, Signal, BAV99 . . . . . 9332 153 70215
6130 Diode, Signal, BAV99 . . . . . 9332 153 70215
6132 Diode, Signal, BAV99 . . . . . 9332 153 70215
6161 Zener Diode, 6.8 volt. 3198 020 56880
6162 Zener Diode, 6.8 volt. 3198 020 56880
7100 IC, CXA2089S 9322 162 27682
7102 Transistor, NPN, BC847B. 3198 010 42030
7105 Transistor, NPN, BC847B. 3198 010 42030
7107 Transistor, NPN, BC847B. 3198 010 42030
7108 Transistor, NPN, BC847B. 3198 010 42030
7109 Transistor, NPN, BC847B. 3198 010 42030
7110 Transistor, NPN, BC847B. 3198 010 42030
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9004 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9006 Wire Jumper, 0.58MM. 3198 036 90010
9007 Wire Jumper, 0.58MM. 3198 036 90010
9008 Wire Jumper, 0.58MM. 3198 036 90010
9009 Wire Jumper, 0.58MM. 3198 036 90010
9010 Wire Jumper, 0.58MM. 3198 036 90010
9100 Wire Jumper, 0.58MM. 3198 036 90010
9101 Wire Jumper, 0.58MM. 3198 036 90010
9102 Wire Jumper, 0.58MM. 3198 036 90010
9103 Wire Jumper, 0.58MM. 3198 036 90010
9104 Wire Jumper, 0.58MM. 3198 036 90010
9105 Wire Jumper, 0.58MM. 3198 036 90010
9106 Wire Jumper, 0.58MM. 3198 036 90010
9107 Wire Jumper, 0.58MM. 3198 036 90010
9108 Wire Jumper, 0.58MM. 3198 036 90010
9109 Wire Jumper, 0.58MM. 3198 036 90010
9110 Wire Jumper, 0.58MM. 3198 036 90010
9111 Wire Jumper, 0.58MM. 3198 036 90010
9112 Wire Jumper, 0.58MM. 3198 036 90010
9113 Wire Jumper, 0.58MM. 3198 036 90010
9114 Wire Jumper, 0.58MM. 3198 036 90010
9115 Wire Jumper, 0.58MM. 3198 036 90010
9116 Wire Jumper, 0.58MM. 3198 036 90010

System Panel Parts

System Panel Parts
1020 System Panel Asm.. . . . . 3135 037 10712
1008 Connector, 9 Pin 2422 025 16049
1009 Connector, 9 Pin 2422 025 16049
1200 Connector, 5 Pin 2422 025 12481
1201 Connector, 10 Pin. 2422 025 12484
1202 Switch, Tactile. 2422 128 02742
1203 Tuner, V+U PLL 2422 542 90077
1204 Switch, Tactile. 2422 128 02742
1205 Connector, SIMM, 80 Pin. 2422 025 16599
1207 Connector, 4 Pin 2422 025 12479
1210 Connector, 64 Pin. 2422 025 17715
1214 Connector, 10 Pin. 2422 025 12484
1215 Connector, 1 Pin 2422 015 18552
1216 Connector, 1 Pin 2422 015 18551
1217 Connector, 1 Pin 2422 015 18552
1218 Connector, 1 Pin 2422 015 18552
1220 Connector, 64 Pin. 2422 025 17715
1241 Connector, 7 Pin 2422 025 11244
1244 Connector, 3 Pin 2412 020 00725
1251 Connector, 3 Pin 2412 020 00725
1252 Connector, 6 Pin 2422 025 17955
1262 Connector, 3 Pin 2422 025 10768
1303 Connector, 5 Pin 2422 025 10428
1305 Connetort, 7 Pin 2422 025 09407
1312 Connector, 7 Pin 2422 025 11244
1313 Connector, 8 Pin 2422 025 10648
1314 Connector, 9 Pin 2422 025 12827
1335 Connector, 11 Pin. 2422 025 12485
1337 Connector, 1 Pin 2422 015 18552
1344 Connector, 5 Pin 2422 025 12481
1403 Connector, 12 Pin. 2422 025 08333
1600 Resonator Crystal, 12Mhz, 20P, DSX840 R. 2422 543 01095
1681 Connector, 3 Pin 2422 025 10768
1683 Connector, 5 Pin, FFC 0.3. . . . . 2422 025 16563
1700 Connector, 8 Pin 2422 025 12483
2101 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2102 Cap, 100u, 20%, 50v, Electrolytic. . . . 3198 025 51010
2103 Cap, 220u, 20%, 16v, Electrolytic. . . . 3198 025 22210
2104 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2105 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2106 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2107 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2108 Cap, 2u2, 20%, 25v, Electrolytic 2020 021 91551
2109 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2110 Cap, 470u, 20%, 16v, Electrolytic. . . . 2020 021 91687
2111 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2112 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2113 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2114 Cap, 1000u, 20%, 16v, Electrolytic . . . 3198 026 21020
2115 Cap, 2u2, 20%, 10v, Electrolytic 2020 021 91668
2116 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2117 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2118 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2119 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2120 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2121 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2122 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2123 Cap, 330u, 20%, 16v, Electrolytic. . . . 2020 021 91536
2124 Cap, 470u, 20%, 10v, Electrolytic. . . . 2020 021 91569
2125 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2126 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020

2127 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2129 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2130 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2201 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2202 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2203 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2204 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2205 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2206 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2207 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2208 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2209 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2210 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2211 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2212 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2213 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2214 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2215 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2216 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2218 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2219 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2301 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2302 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2303 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2306 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2307 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2308 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2309 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2312 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2313 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2314 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2315 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2316 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2317 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2318 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2319 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2320 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2321 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2322 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2323 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2324 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2325 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2326 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2327 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2328 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2329 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2330 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2331 Cap, 22n, +80/-20%, 50v, Ceramic 3198 017 22230
2332 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2333 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2334 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2335 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2336 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2337 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2338 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2339 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2340 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2341 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2342 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2343 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2344 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2345 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2347 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2348 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2349 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2350 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2351 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2352 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2353 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2354 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2355 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2356 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2357 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2358 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2359 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2360 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2361 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2362 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2363 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2364 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2365 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2366 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2367 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2368 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2369 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2370 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2371 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2372 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2374 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2375 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2376 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2377 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2378 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2379 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2380 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2381 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2382 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2383 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2384 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2385 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2386 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2387 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2388 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2389 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2390 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2391 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2392 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2393 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2394 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2395 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2396 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
3101 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3102 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3106 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3108 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3109 Res, 10K, 1%, 1/8W, Metalized Glass. . . 2322 734 61003
3110 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3111 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3112 Res, 120K, 1%, 1/8W, Metalized Glass . . 2322 734 61204
3113 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3118 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3119 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3120 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3121 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3122 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3201 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3202 Res, 3K9, 5%, 1/10W, Metalized Glass . . 3198 021 53920
3203 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3204 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3205 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3206 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3207 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3208 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3209 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3210 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3211 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3212 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3213 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3214 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3215 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3216 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3217 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3218 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3219 Res, 270 ohm, 5%, 1/10W, Metalized Glass 3198 021 52710
3220 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3221 Res, 27K, 5%, 1/10W, Metalized Glass . . 3198 021 52730
3222 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3223 Res, 180 ohm, 5%, 1/10W, Metalized Glass 3198 021 51810
3224 Res, 330 ohm, 5%, 1/10W, Metalized Glass 3198 021 53310
3225 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3226 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3227 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3228 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3229 Res, 22 ohm, 5%, 1/10W, Metalized Glass. 3198 021 52290
3230 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3231 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3232 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3234 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3235 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 2322 734 66801
3236 Res, 560 ohm, 5%, 1/10W, Metalized Glass 3198 021 55610
3237 Res, 1K2, 1%, 1/8W, Metalized Glass. . . 2322 734 61202
3238 Res, 220K, 5%, 1/10W, Metalized Glass. . 3198 021 52240
3239 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3240 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3241 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3242 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3243 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 2322 734 62202
3305 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3306 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3307 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3308 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3309 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3310 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3311 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3312 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3313 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3314 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3315 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3316 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3317 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320

S = Safety Part Be sure to use exact replacement part.

3318 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3319 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3320 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3321 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3323 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3324 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3325 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3326 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3328 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3329 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3330 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3331 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3332 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3333 Res, 33 ohm, 5%, 1/10W, Metalized Glass. 3198 021 53390
3334 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3335 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3336 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3337 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3338 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3339 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3340 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3341 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3342 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3343 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3344 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3345 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3346 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3347 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3348 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3349 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3350 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3351 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3352 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3353 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3354 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3355 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3356 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3357 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3358 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3359 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3360 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3361 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3362 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3363 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3364 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3365 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3366 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3370 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3371 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3372 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3373 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3374 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3375 Res, 15K, 5%, 1/10W, Metalized Glass . . 3198 021 51530
3376 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3377 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3378 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3379 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3380 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3381 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3382 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3383 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3384 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3385 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3390 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3391 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3392 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3393 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3394 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3395 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3396 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
4104 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4105 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4106 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4107 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4108 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4109 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4110 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4118 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4119 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4120 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4121 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4129 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5101 Coil, 6u8. . . . . 2422 535 94819
5102 Coil, 1u 2422 535 95387
5103 Coil, 1u 2422 535 95387
5104 Coil, 1u 2422 535 95387
5106 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5107 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5108 Coil, 1u 2422 535 95387
5109 Coil, 1u 2422 535 95387
5110 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5111 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5112 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5113 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5301 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5302 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5303 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5304 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5305 Coil, 2u2. . . . . 3198 018 42280
5306 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5307 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5308 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5309 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5310 Coil, 8u2. . . . . 3198 018 28280
5311 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5312 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5313 Coil, 330u 2422 535 94649
5315 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5316 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5317 Coil, 8u2. . . . . 2422 535 96517
6101 Diode, Signal, BAS316. . . . . 3198 010 10630
6102 Diode, Signal, BAS316. . . . . 3198 010 10630
6103 Diode, Signal, BAS316. . . . . 3198 010 10630
6104 Diode, Signal, BAS316. . . . . 3198 010 10630
6105 Diode, Rect, SB140. . . . . 9339 577 60673
6106 Diode, Signal, BAS316. . . . . 3198 010 10630
6107 Diode, Signal, BAS316. . . . . 3198 010 10630
6108 Diode, Signal, BAS316. . . . . 3198 010 10630
6109 Diode, Signal, BAS316. . . . . 3198 010 10630
6110 Diode, Signal, BAS316. . . . . 3198 010 10630
6111 Diode, Signal, BAS316. . . . . 3198 010 10630
6112 Zener Diode, 15 volt 9335 006 90133
6113 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6114 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6201 Zener Diode, 6.8 volt. 9340 548 55115
6202 Zener Diode, 6.8 volt. 9340 548 55115
6300 Diode, Signal, BAS316. . . . . 3198 010 10630
6301 Diode, Signal, BAS316. . . . . 3198 010 10630
6302 Diode, Signal, BAS316. . . . . 3198 010 10630
6304 Diode, Signal, BAS316. . . . . 3198 010 10630
6305 Diode, Signal, BAS316. . . . . 3198 010 10630
6306 Diode, Signal, BAS316. . . . . 3198 010 10630
7001 Transistor, NPN, BC847B. 3198 010 42030
7002 Transistor, NPN, BC847B. 3198 010 42030
7003 Transistor, NPN, BC847B. 3198 010 42030
7004 Transistor, NPN, BC847B. 3198 010 42030
7005 Transistor, PNP, BC857B. 3198 010 42150
7006 Transistor, PNP, BC857B. 3198 010 42150
7007 Transistor, PNP, BC857B. 3198 010 42150
7008 Transistor, NPN, BC847B. 3198 010 42030
7009 Transistor, NPN, BC847B. 3198 010 42030
7010 Transistor, NPN, BC847B. 3198 010 42030
7011 Transistor, NPN, BC847B. 3198 010 42030
7012 Transistor, NPN, BC847B. 3198 010 42030
7013 Transistor, PNP, BC857B. 3198 010 42150
7014 F.E.T. STD3NK60Z. 9322 195 38668
7015 Transistor, PNP, BC857B. 3198 010 42150
7017 Transistor, PNP, BC857B. 3198 010 42150
7018 Transistor, NPN, BC847B. 3198 010 42030
7020 Transistor, NPN, BC847B. 3198 010 42030
7021 Transistor, NPN, BC847B. 3198 010 42030
7022 Transistor, NPN, BC847B. 3198 010 42030
7023 Transistor, NPN, BC847B. 3198 010 42030
7024 Transistor, PNP, BC857B. 3198 010 42150
7025 Transistor, NPN, BC847B. 3198 010 42030
7101 IC, TC74HC590AF-EL 9322 167 76668
7102 IC, TC74HC590AF-EL 9322 167 76668
7103 IC, CY7C199-15ZC 9322 153 66668
7104 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7105 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7106 IC, CD74ACT151M. 9322 195 64668
7107 IC, M24C32-WMN6. . . . . 9322 124 74668
7108 IC, P89C668HBA/00. . . . . 9352 654 18112
7109 IC, TL431BCLP. 9322 115 98676
7110 IC, TLC0832CD. 9322 185 44668
7111 IC, NE555D 9336 561 10623
7113 IC, TEA6422D 9322 116 87668
7114 IC, PCF8574T 9337 280 80118
7115 IC, TL431BCLP. 9322 115 98676
7116 IC, TDA7309D 9322 110 45668
7117 IC, TDA1308T/N1. . . . . 9350 721 10115
7118 IC, NE555D 9336 561 10623
7120 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
7121 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010

LED Sensor Panel Parts

LED Sensor Panel Parts

S = Safety Part Be sure to use exact replacement part.

1024 LED Panel Asm.	3135 037 10741
0207 Holder, LED.	3139 124 23831
0209 Holder, Photo Diode.	3104 304 19732
1201 Connector, 4 Pin	2422 025 12489
1214 Connector, 10 Pin.	2422 025 12493
2001 Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2002 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2003 Cap, 100u, 20%, 10v, Electrolytic.	3198 025 11010
2004 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
3001 Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3002 Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3003 Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3004 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3005 Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3006 Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3007 Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3008 Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3009 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3010 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3011 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3012 Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3013 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3016 Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4004 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4005 Res, Zero ohm, "Chip" Jumper	3198 021 90030
6000 LED, TLUV5300.	9338 792 00682
6003 IR Receiver, TSOP2136UH1	9322 159 21667
6004 Optical Sensor, BPW46.	9322 032 38682
7000 IC, LM358DR2	9339 265 90668
7001 Transistor, NPN, BC847B.	3198 010 42030

Side Jack Panel Parts

Side Jack Panel Parts

1028 Side Jack Panel Asm.	3135 037 10751
1300 Switch, Push, 2 Pin, 2 Position, 30v	2422 128 03068
1301 Socket, MDin, 4 Pin, TCS7959 Y	2422 026 05157
1302 Socket, Cinch, 3 Pin	2422 026 05493
1303 Socket, Phone, 1 Pin	2422 026 04747
1335 Connector, 11 Pin.	2422 025 12485
1337 Connector, 1 Pin	2422 015 18552
1344 Connector, 5 Pin	2422 025 12481
2107 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2108 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2109 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2110 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2111 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2112 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2113 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2114 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2115 Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
3106 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3115 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3116 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3117 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3119 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3120 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3121 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3122 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3123 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3124 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3125 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001 Coil, 270n	3198 018 32770
5002 Coil, 270n	3198 018 32770
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 Zener Diode, 6.8 volt.	9340 386 40115
6004 Zener Diode, 6.8 volt.	9340 386 40115
6005 Zener Diode, 6.8 volt.	9340 386 40115
6006 Zener Diode, 6.8 volt.	9340 386 40115
6007 Zener Diode, 6.8 volt.	9340 386 40115
6008 Zener Diode, 6.8 volt.	9340 386 40115
6009 Zener Diode, 6.8 volt.	9340 386 40115
6010 Zener Diode, 6.8 volt.	9340 386 40115
6011 Zener Diode, 6.8 volt.	9340 386 40115
6012 Zener Diode, 6.8 volt.	9340 386 40115

LED/Keyboard Panel Parts

LED/Keyboard Panel Parts

1032 LED/Keyboard Panel Asm..	3135 037 12561
1001 Switch, Tactile.	2422 128 02742
1002 Switch, Tactile.	2422 128 02742
1003 Switch, Tactile.	2422 128 02742
1004 Switch, Tactile.	2422 128 02742
1005 Switch, Tactile.	2422 128 02742
1006 Switch, Tactile.	2422 128 02742
1201 Connector, 4 Pin	2422 025 12489
1202 Connector, 1 Pin	2422 015 18551
1203 LED, Holder (Not Shown).	3135 034 00711
3001 Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322 734 63901
3002 Res, 200 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62001
3003 Res, 620 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66201
3004 Res, 1K1, 1%, 1/8W, Metalized Glass.	2322 734 61102
3006 Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3007 Res, 2K4, 1%, 1/8W, Metalized Glass.	2322 734 62402
3009 Res, 910 ohm, 1%, 1/8W, Metalized Glass.	2322 734 69101
3010 Res, 160 ohm, 1%, 1/8W, Metalized Glass.	2322 734 61601
3011 Res, 120 ohm, 5%, 1/10W, Metalized Glass	3198 021 51210
4000 Res, Zero ohm, "Chip" Jumper	3198 021 90020
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 LED, TLHB5400.	9322 188 10682
7000 Transistor, NPN, BC847B.	3198 010 42030

Thermal Sensor Panel Parts

Thermal Sensor Panel Parts

1034 Thermal Sensor Panel Asm..	3135 037 10781
1202 Connector, 3 Pin	2422 025 10775
2001 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2002 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3001 Res, 5K6, 1%, 1/8W, Metalized Glass.	2322 734 65602
3002 Res, 68K, 1%, 1/8W, Metalized Glass.	2322 734 66803
3003 Res, 820 ohm, 1%, 1/8W, Metalized Glass.	2122 118 05988
3004 Res, 680 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66801
3005 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
S 3006 NTC, 10K, 5%, 1/2W	2322 640 33103
3007 Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3008 Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
7001 Transistor, NPN, BC847B.	3198 010 42030
7002 Transistor, NPN, BC847B.	3198 010 42030

Input Power Panel Parts

Input Power Panel Parts

1045 Input Power Panel Asm.	3135 037 11421
0001 Insulator, SP-900.	3135 010 02331
0002 Clip, Transistor	3135 011 02681
0013 Spring	3139 121 24583
0014 Spring	3139 121 24583
0018 Insulator, SP-900.	3135 010 02331
0019 Clip, Transistor	3135 011 02681
0020 Spring	3139 121 24583
0201 Spring	3135 011 01041
0215 Insulator.	3135 010 02321
1206 Connector, 1 Pin	2422 015 18552
1208 Surge Protector, DSP-501N-A21F	2422 549 42349
1209 Connector, 1 Pin	2422 015 18552
S 1210 Relay, 1 Pin, 5V, 5A	2422 132 07411
S 1211 Fuse/Clip, 6A3, 250V, IEC.	2422 093 00036
1212 Connector, 4 Pin	2422 025 15503
S 1214 Protection Device, 5.5 KVDC, UL5500.	2422 549 43369
1215 Heatsink	3135 031 60051
1217 Connector, 1 Pin	2422 015 18552
1218 Connector, 1 Pin	2422 015 18552
1310 Connector, 2 Pin	2422 025 11196
1311 Connector, 6 Pin	2422 025 14044
1316 Connector, 4 Pin	2422 025 10647
1401 Heatsink	3135 031 60071
1402 Heatsink, TO-220	3135 031 60133
1403 Connector, 12 Pin.	2422 025 08333
1410 Connector, 2 Pin	2412 020 00724
1460 Connector, 3 Pin	2412 020 00725
1518 Heatsink	3135 031 60071
1520 Heatsink, TO-220	3135 031 60133
2200 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2201 Cap, 220n, 20%, 275v, Metalized Polypropylene	2222 336 29146
2202 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2203 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2205 Cap, 680n, 20%, 275v, Metalized Polypropylene	2222 336 29149
2209 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2210 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2211 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2212 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
S 2213 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2214 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2215 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2216 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2217 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2219 Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759
S 2220 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2225 Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2249 Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 2421 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2423 Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
2424 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557

S = Safety Part Be sure to use exact replacement part.

2431	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2432	Cap, 1n, 10%, 1000v, Ceramic	3198 019	61020
2433	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
S 2435	Cap, 470p, 10%, 50v, Ceramic	2020 554	90169
2436	Cap, 47u, 20%, 50v, Electrolytic	2020 021	91521
2437	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2441	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2442	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2443	Cap, 4n7, 10%, 50v, Ceramic.	3198 019	14720
2444	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2453	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2454	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2456	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2457	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2472	Cap, 220u, 20%, 10v, Electrolytic.	3198 025	12210
2473	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2522	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2523	Cap, 470p, 10%, 50v, Ceramic	3198 019	14710
2530	Cap, 220p, 10%, 1000v, Ceramic	3198 019	62210
2534	Cap, 100u, 20%, 400v, Electrolytic	2020 021	91759
2535	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2536	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2541	Cap, 10u, 20%, 50v, Electrolytic	2020 021	91808
2542	Cap, 10n, +80/-20%, 50v, Ceramic	3198 019	21030
2543	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019	22230
2544	Cap, 47u, 20%, 16v, Electrolytic	2020 021	91804
3204	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242	13225
3207	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3210	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3211	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
S 3212	VDR, DC, 1MA/495V, MAX 850VB.	2322 595	90021
3213	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3214	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3215	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3216	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3217	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103	90042
3218	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3219	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3245	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021	53320
3246	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3247	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3248	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3249	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3252	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3253	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3403	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011	01230
3425	Res, 100 ohm, 5%, 3W, Metal Film	2120 105	93581
3426	Res, 56K, 1%, 3/5W, Metal Film	2312 915	15603
3429	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3430	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3431	Res, 56K, 5%, 1/6W, Carbon Film.	3198 011	05630
3432	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3433	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3438	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3441	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011	04720
3444	Res, 820K, 1%, 3/5W, Metal Film.	2312 915	18204
3445	Res, 100K, 1%, 3/5W, Metal Film.	2312 915	11004
3453	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3456	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3460	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3461	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3462	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021	54720
3463	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3464	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021	52720
3465	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021	53920
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3470	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011	04790
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3472	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3473	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3474	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3475	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3476	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3522	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3526	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3533	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3536	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011	01090
3537	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3538	Res, 1K, 1%, 3/5W, Metal Film.	2312 915	11002
3539	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3540	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3541	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3542	Res, 120K, 1%, 3/5W, Metal Film.	2312 915	11204
3543	Res, 3K, 1%, 1/8W, Metalized Glass	2322 734	63002
3544	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021	52230
5210	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5211	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5213	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5218	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5406	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5407	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5408	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5409	Coil, 1u	2422 535	95387
5410	Transformer, SMT Layer, US28206-01	2422 531	02553
5411	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5412	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5417	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5419	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5420	Coil, 1u	2422 535	95387
5422	Coil, 1u	2422 535	95387
5502	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5503	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5507	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5509	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5510	Coil, Choke, 190uH, UC28214-03 Y	2422 536	00594
5514	Filter, Mains, 100uH, 2A2, W8051	2422 549	44101
6200	Diode, Signal, 1N4148.	3198 010	10010
6201	Diode, Bridge Rect, GBU6JL-7002	9322 138	08667
6202	Diode, Bridge Rect, GBU4JL-7002	9322 132	55667
6402	Diode, Signal, 1N4148.	3198 010	10010
6403	Diode, Signal, BAS316.	3198 010	10630
6404	Optic Coupler, CQY80NG	9338 941	50682
6405	Diode, Rect, BYV95C	9335 001	80133
6406	Zener Diode, 18 volt	3198 010	21890
6407	Zener Diode, 6.8 volt.	3198 010	26880
6408	Diode, Signal, BAS316.	3198 010	10630
6409	Diode, Signal, 1N4148.	3198 010	10010
6410	Optic Coupler, CQY80NG	9338 941	50682
6411	Diode, Rect, BY229X-800	9340 380	30127
6413	Diode, Rect, BYW29EX-200.	9340 412	80127
6414	Diode, Rect, BYW29EX-200.	9340 412	80127
6501	Diode, Rect, BYV29F-400	9338 673	00127
7211	Transistor, NPN, BC547B.	3198 020	40030
7212	Transistor, PNP, BC857B.	3198 010	42150
7402	IC, TOP247Y.	9322 181	88687
7406	IC, TL431BCLP.	9322 115	98676
7408	Transistor, PNP, BC857B.	3198 010	42150
7409	Transistor, NPN, BC847B.	3198 010	42030
7410	Transistor, PNP, BC857B.	3198 010	42150
7411	Transistor, NPN, BC847B.	3198 010	42030
7412	Transistor, PNP, BC857B.	3198 010	42150
7500	Transistor, PNP, BC857B.	3198 010	42150
7502	IC, TOP247Y.	9322 181	88687
7506	IC, TL431BCLP.	9322 115	98676
9010	Wire Jumper, 0.58MM.	3198 036	90010
9011	Wire Jumper, 0.58MM.	3198 036	90010
9016	Wire Jumper, 0.58MM.	3198 036	90010
9020	Wire Jumper, 0.58MM.	3198 036	90010
9022	Wire Jumper, 0.58MM.	3198 036	90010
9023	Wire Jumper, 0.58MM.	3198 036	90010
9024	Wire Jumper, 0.58MM.	3198 036	90010
9025	Wire Jumper, 0.58MM.	3198 036	90010
9026	Wire Jumper, 0.58MM.	3198 036	90010
9027	Wire Jumper, 0.58MM.	3198 036	90010
9028	Wire Jumper, 0.58MM.	3198 036	90010
9029	Wire Jumper, 0.58MM.	3198 036	90010
9201	Wire Jumper, 0.58MM.	3198 036	90010
9204	Wire Jumper, 0.58MM.	3198 036	90010
9206	Wire Jumper, 0.58MM.	3198 036	90010
9207	Wire Jumper, 0.58MM.	3198 036	90010

Audio Amp Panel Parts

Audio Amp Panel Parts

0070	Clip, Transistor	3135 011	02681
0071	Insulator.	3135 010	02351
1012	Audio Amp Panel Asm.	3135 037	11411
1216	Connector, 1 Pin	2422 015	18551
1305	Connetort, 7 Pin	2422 025	09407
1316	Connector, 4 Pin	2422 025	10647
1321	Connector.	2422 025	15781
1700	Connector, 8 Pin	2422 025	12483
1701	Heatsink, Vertical, Audio.	3135 031	60151
1702	Thyristor, BT169B.	9338 268	50126
1703	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
1704	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
2701	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2702	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2703	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2704	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2705	Cap, 2u2, 20%, 50v, Electrolytic	3198 025	52280
2706	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2707	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2708	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023	22240
2709	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2710	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2711	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2712	Cap, 220n, +80/-20%, 50v, Ceramic.	2238 580	19814
2713	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2714	Cap, 33n, 10%, 50v, Ceramic.	3198 017	03330
2715	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2716	Cap, 330p, 5%, 50v, Ceramic.	3198 016	03310
2717	Cap, 100p, 5%, 50v, Ceramic.	3198 016	01010

S = Safety Part Be sure to use exact replacement part.

2718 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2719 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2720 Cap, 220n, +80/-20%, 25v, Ceramic. . . . 3198 023 22240
2721 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2722 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2723 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2724 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2725 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2726 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2727 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2728 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2729 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2730 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2731 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2732 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2733 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2734 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2735 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2736 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2737 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2739 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2740 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2741 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2742 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2743 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2744 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2745 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2763 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2776 Cap, 47u, 20%, 50v, Electrolytic 3198 025 54790
2777 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2780 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
2781 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
3701 Res, 10K, 5%, 1/6W, Carbon Film. 3198 011 01030
3702 Res, 6K8, 5%, 1/6W, Carbon Film. 3198 011 06820
3703 Res, 33K, 5%, 1/10W, Metalized Glass . . 3198 021 53330
3704 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3705 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3706 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3707 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3708 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3709 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3710 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3711 Res, 120K, 5%, 1/4W, Carbon Film 2122 101 02074
3712 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3713 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3714 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3715 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
3716 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3717 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3718 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3719 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3720 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3721 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3722 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3723 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3724 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3725 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3726 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3727 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3728 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3729 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3730 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3731 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3732 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3733 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3734 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3790 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3791 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3792 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3793 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3796 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3797 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3798 Res, 3K3, 5%, 1/6W, Carbon Film. 3198 011 03320
3799 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
4700 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4701 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5701 Inductor, Fixed, 68uH, 10% 2422 536 00504
5702 Inductor, Fixed, 68uH, 10% 2422 536 00504
5707 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5708 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5713 Coil, 1u 2422 535 95387
5714 Coil, 1u 2422 535 95387
5715 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5716 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
6701 Diode, Signal, 1N4148. . . . . 3198 010 10010
6702 Diode, Signal, 1N4148. . . . . 3198 010 10010
6703 Diode, Signal, 1N4148. . . . . 3198 010 10010
6704 Diode, Signal, BAS316. . . . . 3198 010 10630
6705 Diode, Signal, BAS316. . . . . 3198 010 10630
6706 Diode, Signal, BAS316. . . . . 3198 010 10630
6707 Diode, Signal, BAS316. . . . . 3198 010 10630
6708 Diode, Signal, BAS316. . . . . 3198 010 10630
6709 Diode, Signal, BAS316. . . . . 3198 010 10630
6710 Diode, Signal, BAS316. . . . . 3198 010 10630
6711 Diode, Signal, BAS316. . . . . 3198 010 10630
7700 IC, TDA7490. . . . . 9322 147 50667
7701 Transistor, NPN, BC847B. 3198 010 42030
7704 Transistor, NPN, BC847B. 3198 010 42030
7705 Transistor, NPN, BC847B. 3198 010 42030
7706 Transistor, PNP, BC857B. 3198 010 42150
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 Transistor, NPN, BC847B. 3198 010 42030
9012 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9027 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9034 Wire Jumper, 0.58MM. 3198 036 90010

DW PIP Panel Parts

DW PIP Panel Parts
0200 Connector, Printed Circuit 4822 267 10734
0201 Connector, B10B-EH-A 4822 267 10557
0205 Connector, 10 Pin. 2422 025 16587
0207 Connector, Printed Circuit, 4 Pin. . . . 4822 267 10565
0236 Connector, Printed Circuit 4822 267 10735
0237 Connector, Printed Circuit, 1 Pin. . . . 4822 267 10676
1184 DW PIP Panel Asm.. . . . . 3139 177 20061
1327 Crystal, 12 Mhz. 4822 242 10694
1334 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1352 Filter, SAW, 45MHZ75. . . . . 2422 549 43074
1501 Crystal, Resonator, 32Khz76. . . . . 2422 543 01069
2261 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2262 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2265 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2269 Cap, 47n, 10%, 50v, Ceramic. 4822 126 13751
2301 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2302 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2303 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2306 Cap, 10n, 10%, 50V 5322 126 11583
2309 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2311 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2312 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2313 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2314 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2316 Cap, 22n, 10%, 25V 4822 126 14494
2317 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2319 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2321 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2322 Cap, 10u, 20%, 63V 4822 124 40248
2324 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2327 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2328 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2331 Cap, 2u2, 20%, 50v, Electrolytic 4822 124 22652
2332 Cap, 220n, +/-80/20, 25v, Ceramic. . . . 4822 126 14076
2333 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2334 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2335 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2336 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2338 Cap, 2,2nF, 10%, 63V, Ceramic. 4822 122 33127
2342 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2345 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2348 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2351 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2354 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2355 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2356 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2357 Cap, 10p, 1%, 50v, Ceramic 2238 861 18109
2372 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2373 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2374 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2375 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2376 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2377 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2380 Cap, 10u, 20%, 63V 4822 124 40248
2385 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2386 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2390 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2391 Cap, 100p, 5%, 50v, Ceramic. 2020 552 94427
2392 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2393 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2401 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2402 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2403 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2404 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2405 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2411 Cap, 10u, 20%, 63V 4822 124 40248
2412 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2415 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879

S = Safety Part Be sure to use exact replacement part.

2431 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2432 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2434 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2436 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2438 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2439 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2440 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2501 Cap, 22p, 5%, 50V Ceramic. 5322 122 32658
2502 Cap, 8.2p, 0.5%, 50V 4822 126 14487
2503 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2504 Cap, 68n, 10%, 25v, Ceramic. 2020 552 96325
2505 Cap, 560p, 10%, 50v, Ceramic 4822 126 14249
2506 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2507 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2508 Cap, 6n8, 10%, 63v, Ceramic. 5322 126 11582
2509 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2511 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2811 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2812 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2813 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2814 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2816 Cap, 10u, 20%, 63V 4822 124 40248
2817 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2818 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2819 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2821 Cap, 10u, 20%, 63V 4822 124 40248
2822 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2823 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2824 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2825 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2826 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2827 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2828 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2829 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2831 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2832 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2833 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2834 Cap, 10u, 20%, 63V 4822 124 40248
2836 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2837 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2838 Cap, 220u, 20%, 6.3v, Electrolytic . . . 4822 124 11912
2839 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2841 Cap, 10u, 20%, 63V 4822 124 40248
2842 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2843 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2844 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2846 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2847 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2848 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2849 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2851 Cap, 10u, 20%, 63V 4822 124 40248
2852 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2853 Cap, 10u, 20%, 63V 4822 124 40248
2854 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2856 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2857 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2861 Cap, 10u, 20%, 63V 4822 124 40248
2862 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2863 Cap, 22u, 50v, Electrolytic Aluminum . . 4822 124 81151
2864 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2866 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2867 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2868 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2869 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2871 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2872 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2873 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2874 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2876 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2877 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2878 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2879 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2891 Cap, 1nF, 10%, 63V, Ceramic. 5322 122 31647
2892 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2893 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2894 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2895 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2896 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2897 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2898 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2899 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
3263 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 4822 117 11449
3264 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3267 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3268 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3270 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3301 Res, 1k, 5%, 1/16W 4822 051 30102
3302 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3305 Res, 2K7, 1%, 1/8W, Metalized Glass. . . 4822 117 12955
3311 Res, 27K, 5%, 1/8W, Metalized Glass. . . 4822 051 20273
3312 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3315 Res, 39K, 1%, 1/8W, Metalized Glass. . . 4822 117 12708
3316 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3318 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3321 Res, 10k, 5%, 1/16W. 4822 051 30103
3322 Res, 8K2, 1%, 1/16W. 4822 117 12902
3324 Res, 390 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20391
3326 Res, 1K, 1%, 0,125W. 5322 117 12487
3327 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3329 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3330 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3333 Res, 1k, 5%, 1/16W 4822 051 30102
3334 Res, 470R, 5%, 0,062W. 4822 051 30471
3335 Res, 120 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20121
3336 Res, 1k, 5%, 1/16W 4822 051 30102
3338 Res, 75 ohm, 1%, 1/8W, Metalized Glass . 4822 117 11927
3339 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3340 Res, 2k2, 5%, 1/16W. 4822 051 30222
3341 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3344 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3346 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3347 Res, 390 ohm, 5%, 1/16W. 4822 051 30391
3348 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3364 Res, 1k, 5%, 1/16W 4822 051 30102
3365 Res, 1K, 1%, 0,125W. 5322 117 12487
3370 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3371 Res, 15K, 1%, 1/8W, Metalized Glass. . . 4822 116 83933
3374 Res, 4k7, 5%, 1/16W. 4822 051 30472
3381 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3382 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3383 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3384 Res, 10k, 5%, 1/16W. 4822 051 30103
3385 Res, 4k7, 5%, 1/16W. 4822 051 30472
3386 Res, 10k, 5%, 1/16W. 4822 051 30103
3387 Res, 39K, 5%, 0,062W 4822 051 30393
3388 Res, 10k, 5%, 1/16W. 4822 051 30103
3389 Res, 4k7, 5%, 1/16W. 4822 051 30472
3390 Res, 470R, 5%, 0,062W. 4822 051 30471
3401 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3402 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3403 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3404 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3405 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3411 Res, 47k, 1%, 1/16W. 4822 117 12925
3412 Res, 47k, 1%, 1/16W. 4822 117 12925
3413 Res, 1k, 5%, 1/16W 4822 051 30102
3414 Res, 47k, 1%, 1/16W. 4822 117 12925
3415 Res, 47k, 1%, 1/16W. 4822 117 12925
3416 Res, 1k, 5%, 1/16W 4822 051 30102
3417 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3418 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3419 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3423 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3424 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3431 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3432 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3437 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3438 Res, 470R, 5%, 0,062W. 4822 051 30471
3439 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3451 Res, 4k7, 5%, 1/16W. 4822 051 30472
3453 Res, 4k7, 5%, 1/16W. 4822 051 30472
3456 Res, 4k7, 5%, 1/16W. 4822 051 30472
3457 Res, 4k7, 5%, 1/16W. 4822 051 30472
3458 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3460 Res, 4k7, 5%, 1/16W. 4822 051 30472
3461 Res, 4k7, 5%, 1/16W. 4822 051 30472
3462 Res, 2R2, 5%, 1/3W,. 4822 052 10228
3501 Res, 470K, 5%, 1/8W, Metalized Glass . . 4822 051 20474
3502 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3503 Res, 470R, 5%, 0,062W. 4822 051 30471
3504 Res, 6K8, 5%, 0,062W 4822 051 30682
3506 Res, 10k, 5%, 1/16W. 4822 051 30103
3507 Res, 6K8, 1%, 1/8W, Metalized Glass. . . 4822 117 11507
3508 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3509 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3510 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3801 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3802 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3803 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3804 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3805 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3806 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3807 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3808 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3809 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3810 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3811 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3812 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3813 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3814 Res, 22k, 5%, 1/16W. 4822 051 30223
3816 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3817 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3818 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3821 Res, 150 ohm, 5%, 1/16W. 4822 051 30151

S = Safety Part Be sure to use exact replacement part.

3822 Res, 4k7, 5%, 1/16W. 4822 051 30472
3823 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3824 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3825 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3826 Res, 3k3, 5%, 1/16W. 4822 051 30332
3827 Res, 1K8, 1%, 0,063W 4822 117 12903
3828 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3829 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3832 Res, 39K, 5%, 0,062W 4822 051 30393
3833 Res, 3k3, 5%, 1/16W. 4822 051 30332
3834 Res, 1K8, 1%, 0,063W 4822 117 12903
3836 Res, 3k3, 5%, 1/16W. 4822 051 30332
3837 Res, 1K8, 1%, 0,063W 4822 117 12903
3838 Res, 39K, 5%, 0,062W 4822 051 30393
3839 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3846 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3854 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3856 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3857 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3858 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3862 Res, 1R, 5%, 0,33W 4822 052 10108
3863 Res, 1R, 5%, 0,33W 4822 052 10108
3865 Res, 3k3, 5%, 1/16W. 4822 051 30332
3866 Res, 1k, 5%, 1/16W 4822 051 30102
3868 Res, 1K8, 1%, 0,063W 4822 117 12903
3869 Res, 3k3, 5%, 1/16W. 4822 051 30332
3871 Res, 2k2, 5%, 1/16W. 4822 051 30222
3872 Res, 470R, 5%, 0,062W. 4822 051 30471
3873 Res, 1k5, 5%, 1/16W. 4822 051 30152
3874 Res, 1k5, 5%, 1/16W. 4822 051 30152
3876 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3878 Res, 1k, 5%, 1/16W 4822 051 30102
3879 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3881 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3884 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3886 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3887 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3888 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3889 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3890 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3891 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3892 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3893 Res, 1k5, 5%, 1/16W. 4822 051 30152
3894 Res, 2k2, 5%, 1/16W. 4822 051 30222
3895 Res, 470R, 5%, 0,062W. 4822 051 30471
3896 Res, 1k5, 5%, 1/16W. 4822 051 30152
3897 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3898 Res, 1k, 5%, 1/16W 4822 051 30102
4301 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4306 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4309 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4310 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4311 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4312 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4313 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4315 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4434 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4437 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4438 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4827 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4828 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
5261 Coil, Fixed, 5U6, 10%. 4822 157 11778
5309 Coil, 680n 4822 157 71334
5332 Coil, 680n 4822 157 71334
5333 Coil, 680n 4822 157 71334
5334 Coil, 680n 4822 157 71334
5349 Coil, 820n 4822 157 71694
5350 Coil, 15u. 3198 018 61590
5351 Coil, 15u. 3198 018 61590
5401 Coil, 4u7. . . . . 2422 535 94637
5501 Coil, 680n 4822 157 71334
5816 Filter, L/C, BLM21A121SPT 4822 157 11506
5818 Filter, L/C, BLM21A121SPT 4822 157 11506
5827 Filter, L/C, BLM21A121SPT 4822 157 11506
5834 Filter, L/C, BLM21A121SPT 4822 157 11506
5839 Filter, L/C, BLM21A121SPT 4822 157 11506
5848 Filter, L/C, BLM21A121SPT 4822 157 11506
5849 Filter, L/C, BLM21A121SPT 4822 157 11506
5851 Filter, L/C, BLM21A121SPT 4822 157 11506
5853 Filter, L/C, BLM21A121SPT 4822 157 11506
6412 Diode, BAS316. . . . . 4822 130 11397
6415 Diode, BAS316. . . . . 4822 130 11397
6801 Diode, Reference, UZ3.9B 4822 130 11564
6802 Diode, Reference, UZ3.9B 4822 130 11564
6803 Diode, BAS316. . . . . 4822 130 11397
7201 Tuner, V+U PLL 2422 542 90115
7301 IC, TDA8887H/N1. . . . . 9352 638 72557
7305 Transistor, NPN, BC847BW 3198 010 42310
7307 Transistor, NPN, BC847BW 3198 010 42310
7331 Transistor, NPN, BC857BW 3198 010 42320
7337 Transistor, NPN, BC847BW 3198 010 42310
7368 Transistor, NPN, BC847BW 3198 010 42310
7385 Transistor, NPN, BC847BW 3198 010 42310
7386 Transistor, NPN, BC847BW 3198 010 42310
7401 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7402 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7403 IC, Digital, MOS, M62320FP 4822 209 17345
7411 Transistor, NPN, BC847BW 3198 010 42310
7412 Transistor, NPN, BC847BW 3198 010 42310
7421 Transistor, NPN, BC857BW 3198 010 42320
7422 Transistor, NPN, BC857BW 3198 010 42320
7434 Transistor, BC369. . . . . 5322 130 44593
7438 Transistor, NPN, BC847BW 3198 010 42310
7501 IC, Digital, MOS, Z86130-12SSC 9322 147 01668
7801 IC, Digital, MOS DRAM, SAB9083H/N4 . . . 9352 639 83557
7802 IC, Analog Voltage/Current Regulator, LD1 117V33 . . . . . 9322 123 54687
7803 IC, TDA8601T/C1. . . . . 4822 209 12776
7804 IC, Digital, MOS, Standard Logic, 74HC1G32GW. 9352 457 50115
7805 Transistor, NPN, BC847BW 3198 010 42310
7806 Transistor, NPN, BC847BW 3198 010 42310
7807 Transistor, NPN, BC847BW 3198 010 42310
7808 Transistor, NPN, BC847BW 3198 010 42310
7809 Transistor, NPN, BC847BW 3198 010 42310
7810 Transistor, NPN, BC847BW 3198 010 42310
7824 Transistor, NPN, BC847BW 3198 010 42310
7828 Transistor, NPN, BC847BW 3198 010 42310
7832 Transistor, NPN, BC847BW 3198 010 42310
7871 Transistor, NPN, BC847BW 3198 010 42310
7874 Transistor, NPN, BC847BW 3198 010 42310
7876 Transistor, NPN, BC857BW 3198 010 42320
7891 Transistor, NPN, BC847BW 3198 010 42310
7892 Transistor, NPN, BC847BW 3198 010 42310
7893 Transistor, NPN, BC847BW 3198 010 42310
7894 Transistor, NPN, BC857BW 3198 010 42320
7895 Transistor, NPN, BC847BW 3198 010 42310

SSB Panel Parts

SSB Panel Parts
1001 Crystal Resonator, 6MHz, 20p 2422 543 89022
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1102 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1103 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1104 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1105 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1185 SSB Panel Assembly 3135 037 12471
1303 Connector, 5 Pin, M. 2422 025 16966
1304 Connector, 7 Pin, M. 2422 025 17104
1308 Crystal Resonator, 3.579545MHz., 16P, HC49/U A. 2422 543 01183
1401 Connector, V, 10 Pin,, F 2422 025 16729
S 1403 Fuse, 500mA, F, 50V. 2422 086 11092
1406 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1410 Filter, S.A.W. 45Mhz75 . . . . . 2422 549 44377
1411 Filter, Ceramic, 4.5Mhz. 2422 549 44534
1651 Crystal Resonator, 18.432MHz, 12P. . . . 2422 543 89019
1680 Connector, V, 6 Pin, M 2422 025 16961
1681 Connector, 3 Pin, V, M 2422 025 17103
1682 Connector, V, 10 Pin,, F 2422 025 16729
1683 Connector, V, 5 Pin, F 2422 025 16793
1702 Ceramic Resonator, 12MHz,, CSTCV 2422 540 98456
2001 Cap, 33p, 5%, 50V, Ceramic 3198 016 33390
2002 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2003 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2004 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2005 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2006 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2007 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2008 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2010 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2011 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2012 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2013 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2016 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2017 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2019 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2020 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2022 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2023 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2024 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2025 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2033 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2034 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2035 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2036 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290

S = Safety Part Be sure to use exact replacement part.

2037 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2038 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2039 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2040 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2052 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2053 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2054 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2055 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2056 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2057 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2100 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2108 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2109 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2110 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2111 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2112 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 10n, 10%, 50V, Ceramic. 3198 017 01030
2312 Cap, 33n, 5%, 50V, Ceramic 2020 552 96659
2312 Cap, 33n, 5%, 16v, Ceramic 2222 781 11569
2340 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2342 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2351 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2356 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 3n3, 10%, 50V, Ceramic. 3198 017 33320
2361 Cap, 1p2, 21%, 50V, Ceramic. 3198 016 31280
2362 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2372 Cap, 1u, +80/-20%, 16V, Ceramic. 3198 017 21050
2373 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2374 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2375 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2376 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2377 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2378 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2384 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2388 Cap, 33n, 10%, 16V, Ceramic. 3198 017 33330
2389 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2390 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2391 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2394 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2395 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2396 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2397 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2399 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2401 Cap, 10n, 10%, 50V, Ceramic. 3198 017 31030
2404 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2405 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2413 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2418 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2420 Cap, 150p, 5%, 50V, Ceramic. 3198 016 31510
2422 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2425 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2501 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2502 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2503 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2504 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2505 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2506 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2507 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2508 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2510 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2511 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2512 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2513 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2515 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2520 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2521 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2522 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2523 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2524 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2525 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2526 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2528 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2529 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2530 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2549 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2550 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2552 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2553 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2554 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2555 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2562 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2563 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2564 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2565 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2566 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2567 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2568 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2569 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2570 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2571 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2574 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2575 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2576 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2577 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2578 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2579 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2582 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2583 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2584 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2585 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2586 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2590 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2592 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2593 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2594 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2595 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2609 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2610 Cap, 2n2, 10%, 50V, Ceramic. 3198 017 32220
2611 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2632 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2634 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2640 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2643 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2644 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2645 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2646 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2649 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2651 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2652 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2653 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2654 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2659 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2660 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2661 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2662 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2663 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2664 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2665 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2666 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2667 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2668 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2670 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2673 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2674 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2677 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2678 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2679 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2680 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2681 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2682 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2686 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2687 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2690 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2691 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2693 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2694 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2695 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2697 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2698 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2709 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2710 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2711 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2712 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2713 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2714 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2716 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2718 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2719 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2720 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2721 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2722 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2728 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2729 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2730 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2731 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2740 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2741 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2742 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2743 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2744 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2745 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2746 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2747 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2748 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2749 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2750 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2751 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2763 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2765 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2766 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2767 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2768 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2771 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2772 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2774 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2776 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2777 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2778 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2779 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2780 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2781 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2782 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2784 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2785 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2786 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2787 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2788 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2789 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2790 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2791 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2792 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2793 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2794 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2795 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2796 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2797 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2798 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2799 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2800 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2801 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2802 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2803 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2805 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2807 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2809 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2810 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2811 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2812 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2813 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2817 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2819 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2820 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2821 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2826 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2829 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2831 Cap, 68p, 5%, 50V, Ceramic 3198 016 36890
2832 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2833 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2835 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2836 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2838 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2843 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2845 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2846 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2847 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2848 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2851 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2859 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2861 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2864 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2865 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2866 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2867 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2870 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2871 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2872 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2874 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2875 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2876 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2880 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2881 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2884 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2899 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2908 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2909 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2910 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2911 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2912 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
3001 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3002 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3003 Res, 24K, 1%, 1/16W, Metalized Glass . . 2322 704 62403
3006 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3007 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3008 Res, Network, 4x220 ohm, 5%. 3198 031 12210
3009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3011 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3012 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3013 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3014 Res, 6K8, 5%, 1/16W, Metalized Glass . . 3198 021 36820
3015 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3016 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3017 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3018 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3019 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3020 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3021 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3024 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3025 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3026 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3027 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3029 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3031 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3033 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3034 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3035 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3039 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3040 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3041 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3042 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3044 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3045 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3046 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3048 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3049 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3050 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3051 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3052 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3053 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3054 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3055 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3056 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3057 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2120 108 93902
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2322 704 66201
3061 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3062 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3064 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3065 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3066 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3067 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3068 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3069 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3074 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3076 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3078 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3079 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3080 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3081 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3088 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720

3090 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3093 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3094 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3095 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3096 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3097 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3098 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3099 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3169 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3170 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3171 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3172 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3173 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3174 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3176 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3180 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3181 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3182 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3183 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3184 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3185 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3186 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3187 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3188 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3189 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3304 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3308 Res, 470K, 5%, 1/10W, Metalized Glass. . 3198 021 54740
3324 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3329 Res, 6R8, 5%, 1/8W, Metalized Glass. . . 2322 750 66808
3330 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3332 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3335 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3355 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3360 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3370 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3371 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3372 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3376 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3377 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3378 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3382 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3385 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3387 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3393 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3395 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3396 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3397 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3398 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3400 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3401 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3402 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3403 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3404 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3405 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3408 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3415 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3418 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3419 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3420 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3436 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3437 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3439 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3441 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3444 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3446 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3447 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3448 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3449 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3456 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3457 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3463 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3467 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3470 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3471 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3473 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3500 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3501 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3504 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3505 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3506 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3509 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3510 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3511 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3512 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3513 Res, 270K, 5%, 1/16W, Metalized Glass. . 2322 702 60274
3514 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3515 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3516 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3519 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3521 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3522 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3523 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3524 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3525 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3526 Res, 1M, 5%, 1/16W, Metalized Glass. . . 3198 021 31050
3527 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3529 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3530 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3531 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3532 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3533 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3540 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3546 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3554 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3558 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3559 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3560 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3561 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3562 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3563 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3564 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3567 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3570 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3571 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3572 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3573 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3574 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3575 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3576 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3577 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3578 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3579 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3614 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3615 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3624 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3626 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3627 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3628 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3630 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3634 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3636 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3637 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3639 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3640 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3641 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3642 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3643 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3644 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3653 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3654 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3658 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3666 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3667 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3668 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3669 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3670 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3671 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3693 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3698 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3699 Res, 180K, 5%, 1/16W, Metalized Glass. . 2322 702 60184
3709 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3710 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3711 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3712 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3713 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3714 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3715 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3716 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3717 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3718 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3719 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3720 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3725 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3726 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3727 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3728 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3730 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3736 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3737 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3738 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3739 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3740 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3741 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3742 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3744 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220

S = Safety Part Be sure to use exact replacement part.

3745 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3746 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3747 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3748 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3749 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3750 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3751 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3752 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3753 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3754 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3755 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3756 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3757 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3758 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3759 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3762 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3763 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3764 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3771 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3772 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3773 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3774 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3781 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3782 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3783 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3792 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3793 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3794 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3795 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3804 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
5150 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5151 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5152 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5153 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5154 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5155 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5305 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5306 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5307 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5308 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5309 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5310 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5311 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5402 Coil, 8u2. . . . . 3198 018 38280
5404 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5405 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5406 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5408 IND VAR SM 5CCB 91MHZ PM R 2422 549 44875
5409 IND FXD 0603 EMI 100MHZ 120R R 2422 549 42893
5409 Inductor, Fixed, 100MHz, 120R 2422 549 42896
5411 Coil, 330n 3198 018 33370
5415 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5416 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5417 Coil, 33u. 3198 018 33390
5651 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5652 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5653 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5654 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5655 Coil, 22u. 3198 018 32290
5656 Coil, 6u8. . . . . 3198 018 36880
5657 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5658 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5659 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5660 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5661 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5662 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5663 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5664 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5665 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5666 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5667 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5668 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5669 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5670 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5671 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5672 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5706 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5707 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5710 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5711 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5712 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5713 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5714 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5716 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5717 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5718 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5719 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5721 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5722 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5724 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5726 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5727 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5728 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5729 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5731 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5736 Coil, 6u8. . . . . 3198 018 36880
5737 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5738 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5742 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5743 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5744 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5900 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5901 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5902 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5903 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5904 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5910 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5911 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5912 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5913 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5914 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5915 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5917 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5918 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5919 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5920 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
6001 Diode, Signal, BAT54 . . . . . 3198 010 10660
6002 Diode, Signal, BAS316. . . . . 3198 010 10630
6003 Diode, Signal, BAT54 . . . . . 3198 010 10660
6004 Diode, Signal, BAT54 . . . . . 3198 010 10660
6005 Diode, Regulator, PLVA2650A. 9340 309 70215
6320 Diode, Signal, BAS316. . . . . 3198 010 10630
6321 Diode, Signal, BAS316. . . . . 3198 010 10630
6322 Diode, Signal, BAS316. . . . . 3198 010 10630
6652 Zener Diode, 10V 3198 020 51090
6657 Zener Diode, 2.7 volt. 9340 548 43115
6658 Diode, Signal, BAS316. . . . . 3198 010 10630
6926 Zener Diode, 8.2V. 3198 020 58280
6956 Zener Diode, 8.2V. 3198 020 58280
6957 Zener Diode, 8.2V. 3198 020 58280
7001 IC, TV System Controller, QFP120, SAA5801 H/015. . . . . 9352 684 81557
7002 Transistor, NPN, BC857BW 3198 010 42320
7003 Transistor, NPN, BC847BW 3198 010 42310
7004 Transistor, NPN, BC847BW 3198 010 42310
7005 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7006 IC, CMOS Flash Memory, TC58FVM5T2ATG65 . 9322 194 83671
7007 IC, CMOS 16 Bit Dynamic RAM, MSM51V18165F 9322 157 20668
7007 IC, CMOS 16-Bit Dynamic RAM, IS41LV16100 9322 200 55668
7008 Transistor, NPN, BC847BW 3198 010 42310
7009 Transistor, NPN, BC847BW 3198 010 42310
7010 Transistor, NPN, BC857BW 3198 010 42320
7011 IC, M24C32-WMN6. . . . . 9322 124 74668
7013 Transistor, NPN, BC847BW 3198 010 42310
7014 Transistor, NPN, BC857BW 3198 010 42320
7015 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7016 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7100 IC, 3.3V Prog. LVDS Transmitter, DS90C385 9322 159 45668
7305 Transistor, NPN, BC847BW 3198 010 42310
7312 Transistor, NPN, PDTC144EU 3198 010 44330
7320 Transistor, NPN, BC847BW 3198 010 42310
7322 Transistor, NPN, BC847BW 3198 010 42310
7323 IC, IIC-Bus Controlled TV Processor. . . 9352 625 24518
7375 Transistor, NPN, BC847BW 3198 010 42310
7402 Transistor, NPN, BC847BW 3198 010 42310
7404 Transistor, NPN, BC847BW 3198 010 42310
7408 Transistor, PNP, BC857B. 3198 010 42150
7409 Transistor, PNP, BC857B. 3198 010 42150
7410 Transistor, NPN, BC847BW 3198 010 42310
7411 Transistor, NPN, BC847B. 3198 010 42030
7651 IC, Multi-standard Sound Processor, MSP34 21G. 9322 183 23671
7654 Transistor, NPN, BC847BS 9340 425 20115
7664 Transistor, NPN, BC847BPN. 9340 425 30115
7665 Transistor, NPN, BC847BPN. 9340 425 30115
7666 Transistor, NPN, BC847BPN. 9340 425 30115
7668 Transistor, NPN, BC857BW 3198 010 42320
7674 Transistor, NPN, BC847BW 3198 010 42310
7675 Transistor, NPN, BC847BS 9340 425 20115
7678 Transistor, NPN, BC847BS 9340 425 20115
7679 Transistor, NPN, BC847BS 9340 425 20115
7681 IC, LP/LN Operational Amplifier. 9322 060 73668
7682 Transistor, NPN, BC847B. 3198 010 42030
7706 IC, Digital, LF25CDT 9322 142 88668
7706 IC, Voltage Regulator w/Inhibit. 9322 164 71668
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7709 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 IC Socket, 32 Pin, V, F. 2422 486 80938
7711 IC, 512 Kbit EPOM, M27C512 . . . . . 9322 127 85668
7712 IC, Octal D-type Transparent Latch . . . 9351 870 00118

S = Safety Part Be sure to use exact replacement part.

7713 IC, PICNIC, SAA4978H 9352 688 09557
7714 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7715 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7717 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7718 IC, Field/Line Rate Converter, SAA4993H. 9352 695 58557
7719 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7722 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7723 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7724 IC, EAGLE - Video Enhancment Processor, T 8F24EF 9322 188 08702
7725 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7726 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7727 IC, Low Drop Volt. Reg. w/Inhibit, LF15AB DT. 9322 170 14668
7734 IC, Inverter, LVLP, 74LVC1G04. . . . . 3198 010 70390
7735 IC, D-type flip-flop, 74LVC1G79. . . . . 9352 686 75125
9008 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9010 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9011 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9012 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9013 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9014 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9302 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9313 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9322 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9401 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9403 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9406 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9407 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9410 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9413 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9414 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9416 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9417 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9520 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9522 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9603 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9604 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9610 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9611 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9632 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9642 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9645 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9676 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9677 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9682 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9683 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9686 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9687 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9691 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9702 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9703 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9704 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9712 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9714 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9716 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9717 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9718 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9719 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9721 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9723 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9725 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9729 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9731 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9733 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9735 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9739 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9740 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9741 Res, Network, 4x10 ohm, 5% 3198 031 11090
9744 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9754 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9760 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9761 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9763 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9764 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9768 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9769 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9901 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9902 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9903 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9904 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9905 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9906 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9907 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9908 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9909 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9919 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9920 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9921 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9925 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9927 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9928 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9929 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9935 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9937 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9938 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9939 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9944 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9945 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9946 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9947 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9948 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9949 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9950 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9951 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9952 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9953 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9954 Res, Zero ohm, 'Chip' Jumper 3198 021 90030

Scaler Board MSB Panel

Scaler Board MSB Panel
0300 Connector, 64 Pin, BM, M 2422 025 17714
0303 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0305 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0308 Phono Jack Board, 4 Plugs, Red & White . 2422 026 05422
0310 Sub-D Connector, 15 Pin, BM, F 2422 025 17027
0311 Phono Jack Board, 6 Plugs, Red , Blue, Green 2422 026 05421
0315 Connector, 5 Pin, M, IDE 2422 025 17931
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Connector, 4 Pin 2422 025 12479
1105 Connector, 10 Pin, V, M. 2422 021 98888
1106 Connector, 10 Pin, V, M. 2422 021 98888
1152 Scaler Board MSB Panel Assembly. 3122 357 22272
1300 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1301 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1302 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1303 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1401 Connector, V, 10 Pin,, F 2422 025 16729
1501 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1502 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1503 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1504 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1505 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1700 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1701 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1702 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1703 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2108 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2109 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2110 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2111 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2121 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2122 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2138 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2139 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2151 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2152 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2153 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2154 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2155 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2156 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2157 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2158 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2159 Cap, 4p7, 5%, 50V, Ceramic 3198 016 34780
2160 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2161 Cap, 100u, 20%, 6.3V, Electrolytic . . . 2020 012 93793
2170 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2171 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2172 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2173 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2174 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2175 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2176 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2177 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2178 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2179 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2180 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2181 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2182 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2183 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2184 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2185 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2186 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2187 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2188 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2189 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2190 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2191 Cap, 68n, 10%, 16V, Ceramic. 3198 017 36830
2192 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2194 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2195 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2196 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2197 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2198 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2199 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2200 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2225 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2226 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2227 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2228 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2229 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2230 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2231 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2232 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2233 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2234 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2235 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2236 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2237 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2238 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2240 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2241 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2242 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2243 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2244 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2245 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2246 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2247 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2248 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2249 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2255 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2260 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2261 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2262 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2263 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2267 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2295 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2296 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2297 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2298 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2299 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2300 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2304 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2305 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2306 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2307 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2308 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2309 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2311 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2312 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2314 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2315 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2316 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2317 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2318 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2319 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2320 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2321 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2322 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2323 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2345 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2346 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2347 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2348 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2349 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2354 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2355 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2359 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2360 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2361 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2362 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2363 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2364 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2372 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2373 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2374 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2375 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2377 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2378 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2379 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2380 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2381 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2382 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2383 Cap, 3n9, 10%, 50V, Ceramic. 2020 552 96428
2384 Cap, 39n, 10%, 50V, Ceramic. 2238 580 15644
2385 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2386 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2405 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2406 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2408 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2409 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2413 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2414 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2415 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2416 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2417 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2418 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2419 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2420 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2421 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2423 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2431 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2432 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2433 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2434 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2435 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2437 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2438 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2439 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2440 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2441 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2443 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2444 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2445 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2446 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2447 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2448 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2492 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2493 Cap, 1u, +80/-20%, 10V, Ceramic. 3198 017 41050
2494 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2495 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2497 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2502 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2535 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2536 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2538 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2539 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2540 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2541 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2542 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2543 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2550 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2582 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2583 Cap, 270p, 5%, 50V, Ceramic. 3198 016 32710
2584 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2585 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2586 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2587 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2588 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2590 Cap, 470p, 2%, 50V, Ceramic. 2238 867 14471
2593 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2594 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2595 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2596 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2598 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2599 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2600 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2633 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290

S = Safety Part Be sure to use exact replacement part.

2634 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2635 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2659 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2660 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2664 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2665 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2666 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2667 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2669 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2670 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2671 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2672 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2710 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2712 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2713 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2714 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2715 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2716 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2718 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2720 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2722 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2724 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2725 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2726 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2727 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2730 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2736 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2737 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2759 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2766 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2767 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2771 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2772 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2780 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2781 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2790 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2820 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2821 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 1n5, 10%, 50V, Ceramic. 3198 017 31520
2826 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2827 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2830 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2831 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2832 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2833 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2850 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2851 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2852 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2855 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2856 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2861 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2862 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2863 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2870 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2871 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2882 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2883 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2886 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2888 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2897 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
3106 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3107 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3108 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3109 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3110 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3111 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3112 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3113 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3114 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3115 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3116 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3120 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3121 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3122 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3123 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3124 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3134 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3135 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3137 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3138 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3139 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3151 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3152 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3153 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3156 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3157 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3158 Res, 75 ohm, 5%, 1/16W, Metalized Glass. 3198 021 37590
3173 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3175 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3176 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3180 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3181 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3182 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3183 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3184 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3185 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3186 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3187 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3188 Res, 68 ohm, 5%, 1/16W, Metalized Glass. 3198 021 36890
3198 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3220 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3221 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3260 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3261 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3262 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3263 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3264 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3265 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3266 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3302 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3303 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3304 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3306 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3345 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3346 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3347 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3348 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3349 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3350 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3351 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3352 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3405 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3406 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3407 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3408 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3409 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3410 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3411 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3413 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3414 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3415 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3416 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3420 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3422 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3423 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3425 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3426 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3427 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3428 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3434 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3435 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3436 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3437 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3438 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3440 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3441 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3444 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3445 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3447 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3448 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3449 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3450 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3451 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3452 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3455 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3456 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3484 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040

S = Safety Part Be sure to use exact replacement part.

3485 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3486 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3487 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3488 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3489 Res, 4R7, 5%, 1/16W, Metalized Glass . . 3198 021 34780
3490 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3492 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3497 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3498 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3499 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3500 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3505 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3506 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3507 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3508 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3511 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3512 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3535 Res, Network, 4x47 ohm, 5% 3198 031 14790
3536 Res, Network, 4x47 ohm, 5% 3198 031 14790
3537 Res, Network, 4x47 ohm, 5% 3198 031 14790
3538 Res, Network, 4x47 ohm, 5% 3198 031 14790
3539 Res, Network, 4x47 ohm, 5% 3198 031 14790
3540 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3541 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3542 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3543 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3544 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3581 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3582 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3583 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3584 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3585 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3586 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3587 Res, 47K, 1%, 1/16W, Metalized Glass . . 2322 704 64703
3588 Res, 330K, 5%, 1/16W, Metalized Glass. . 3198 021 33340
3589 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3590 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3591 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3593 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3595 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3597 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3598 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3599 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3603 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3604 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3605 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3606 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3630 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3631 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3633 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3634 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3635 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3636 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3649 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3651 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3653 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3654 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3666 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3667 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3668 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3669 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3670 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3673 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3674 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3675 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3676 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3677 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3710 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3711 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3713 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3714 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3715 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3716 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3717 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3718 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3720 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3721 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3722 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3725 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3726 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3727 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3730 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3731 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3732 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3733 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3745 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3746 Res, Network, 4x47 ohm, 5% 3198 031 14790
3747 Res, Network, 4x47 ohm, 5% 3198 031 14790
3748 Res, Network, 4x47 ohm, 5% 3198 031 14790
3749 Res, Network, 4x47 ohm, 5% 3198 031 14790
3750 Res, Network, 4x47 ohm, 5% 3198 031 14790
3751 Res, Network, 4x47 ohm, 5% 3198 031 14790
3752 Res, Network, 4x47 ohm, 5% 3198 031 14790
3753 Res, Network, 4x47 ohm, 5% 3198 031 14790
3754 Res, Network, 4x47 ohm, 5% 3198 031 14790
3755 Res, Network, 4x47 ohm, 5% 3198 031 14790
3756 Res, Network, 4x47 ohm, 5% 3198 031 14790
3757 Res, Network, 4x47 ohm, 5% 3198 031 14790
3758 Res, Network, 4x47 ohm, 5% 3198 031 14790
3760 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3761 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3767 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3768 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3769 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3770 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3777 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3779 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3781 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3782 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3790 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3792 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3797 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3798 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3799 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3801 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3820 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3821 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3826 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3828 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3829 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3830 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3831 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3832 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3850 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3851 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3856 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3858 Res, 1K5, 1%, 1/16W, Metalized Glass . . 2322 704 61502
3860 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3861 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3862 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3870 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3871 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3872 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3873 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3999 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
4105 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4106 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4110 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4111 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4267 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4349 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4485 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4650 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4778 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4780 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4793 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4890 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
4891 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4892 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5107 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5160 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5164 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5165 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5166 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5170 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5195 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5225 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5240 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5255 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5260 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5295 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5296 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5297 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5345 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5346 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5347 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5348 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5405 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5406 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5408 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5411 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5486 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5488 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5535 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5536 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5539 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5581 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769

S = Safety Part Be sure to use exact replacement part.

5582 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5583 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5584 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5585 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5633 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5710 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5711 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5712 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5715 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5724 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5746 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5747 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5749 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5751 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5780 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5830 Coil, 22u. 2422 535 95278
5860 Coil, 22u. 2422 535 95278
5890 Coil, 22u. 2422 535 95278
5892 Coil, 22u. 2422 535 95278
6220 Diode, Signal, BAV99 . . . . . 3198 010 10620
6221 Diode, Signal, BAV99 . . . . . 3198 010 10620
6405 Diode, Signal, BAT54 . . . . . 3198 010 10660
6485 Diode, Signal, BAT54 . . . . . 3198 010 10660
6581 Diode, Signal, BAS316. . . . . 3198 010 10630
6630 Zener Diode, 6.8V. 3198 020 56880
6631 Zener Diode, 6.8V. 3198 020 56880
6632 Zener Diode, 6.8V. 3198 020 56880
6633 Zener Diode, 33V 3198 020 53390
6634 Zener Diode, 33V 3198 020 53390
6635 Zener Diode, 33V 3198 020 53390
6636 Zener Diode, 33V 3198 020 53390
6637 Zener Diode, 6.8V. 3198 020 56880
6638 Zener Diode, 6.8V. 3198 020 56880
6639 Zener Diode, 6.8V. 3198 020 56880
6640 Zener Diode, 6.8V. 3198 020 56880
6641 Zener Diode, 6.8V. 3198 020 56880
6642 Zener Diode, 6.8V. 3198 020 56880
6643 Zener Diode, 6.8V. 3198 020 56880
6710 Zener Diode, 6.8V. 3198 020 56880
6711 Zener Diode, 6.8V. 3198 020 56880
6712 Zener Diode, 6.8V. 3198 020 56880
6745 Diode, Signal, BAV99 . . . . . 3198 010 10620
6746 Diode, Signal, BAV99 . . . . . 3198 010 10620
6747 Diode, Signal, BAV99 . . . . . 3198 010 10620
6748 Diode, Signal, BAV99 . . . . . 3198 010 10620
6749 Diode, Signal, BAV99 . . . . . 3198 010 10620
6750 Diode, Signal, BAV99 . . . . . 3198 010 10620
6751 Zener Diode, 6.8V. 3198 020 56880
6752 Zener Diode, 6.8V. 3198 020 56880
6753 Diode, Signal, BAV99 . . . . . 3198 010 10620
6754 Diode, Signal, BAV99 . . . . . 3198 010 10620
6755 Diode, Signal, BAS316. . . . . 3198 010 10630
6756 Diode, Signal, BAS316. . . . . 3198 010 10630
6757 Zener Diode, 33V 3198 020 53390
6758 Zener Diode, 33V 3198 020 53390
6759 Zener Diode, 33V 3198 020 53390
6760 Zener Diode, 33V 3198 020 53390
6761 Zener Diode, 6.8V. 3198 020 56880
6820 Diode, Signal, BAS316. . . . . 3198 010 10630
6830 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
6850 Diode, Signal, BAS316. . . . . 3198 010 10630
6860 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
7107 IC, 2 Ch. IIC Multiplexer, PCA9540 . . . 9352 666 74118
7120 IC, Prog. Gate Array, EP1C6Q240C8. . . . 9322 196 44671
7137 IC, Volt Det. w/Prog. Delay, NCP303LS09. 9322 186 29685
7160 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7170 IC, 140 MSPS Analog Interface, AD9883A . 9322 181 72671
7195 IC, 100 MSPS, 3V A/D Converter, AD9283 . 9322 197 13668
7255 IC, Serial Conf. Flash Memory, 1Mbit, EPC S1. . . . . 9322 196 51682
7260 IC, Serial Conf. f/APEX & FLEX Dev., EPC2 9322 141 53682
7295 IC, Digital Transmitter, SII160CT100 . . 9322 171 04671
7345 IC, 205 MSPS Analog FP Interface, AD9888 9322 179 30671
7346 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7347 IC, Quad Buffer/Driver, 74LVC125AD . . . 9352 317 00118
7405 IC, M24C32-WMN6. . . . . 9322 124 74668
7406 IC, 64k x 16-bit Static RAM, CY62126BV . 9322 164 75682
7407 IC, PW181 Image Processor, PW181-10Q . . 9322 184 01671
7409 IC, 16Mbit, 3V Flash Memory, M29W160ET . 9322 194 74668
7411 Crystal Oscillator, 14.31818MHz, FXO-34FL 2722 171 08787
7484 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7486 Transistor, NPN, BC847BW 3198 010 42310
7487 Transistor, NPN, BC847BW 3198 010 42310
7490 Transistor, NPN, BC847BW 3198 010 42310
7491 Transistor, NPN, BC847BW 3198 010 42310
7494 IC, Prog. Shunt Volt. Ref., TS431. . . . 9322 192 16685
7537 IC, LVDS Receiver to 24bit Conv., DS90CF386. . . . . 9322 164 41668
7581 IC, Dual Retrig. Mono Multivibrator, 74HCT4538. . . . . 9337 153 90118
7582 Transistor, NPN, BC847BW 3198 010 42310
7583 IC, Video Sync Separator, LM188. . . . . 9322 005 78668
7589 IC, Triple 2 Ch. Analog Multiplex/Demultiplexer 9337 153 20118
7592 IC, Ultra Fast Comparator, TL3016. . . . 9322 125 63668
7593 IC, Hex Inverting Schmitt-trigger, 74LVC14A. 9352 607 39118
7594 Transistor, NPN, BC847BW 3198 010 42310
7633 IC, Serial EEPROM. 9322 046 99668
7710 IC, Wide Band Analog Switch, M52758FP. . 9322 185 90668
7715 Transistor, NPN, BC847BW 3198 010 42310
7716 Transistor, NPN, BC847BW 3198 010 42310
7717 Transistor, NPN, BC847BW 3198 010 42310
7725 Transistor, NPN, BC847BW 3198 010 42310
7746 IC, HDCP PanelLink Receiver, SII169CT100 9322 185 79668
7747 IC, Serial EEPROM. 9322 046 99668
7749 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7750 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7820 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7830 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7850 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7860 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7870 IC, Adj. Pos. Volt. Reg., LD1117DT . . . 9322 144 97668

Cabinet & Accessory Parts

0005 System Cooling Fan Assembly. 3135 037 71361
0006 Housing, Control 3135 037 71441
0009 Cable, Thermal Sw. 2 Pin, 600mm. 3135 038 70071
0010 Roller Switch, f/Light Engine Lamp Door. 3135 038 40011
0016 Lamp, Light Engine 3122 438 71310
0017 Light Engine Asm. 1.18", D56, XION 1.05. 3122 437 11481
0018 Bracket, Light Engine. 3135 034 01923
0019 Screen, Lenticular, 55W LCoS 3135 033 20311
0020 Screen, Fresnel, 55W LCoS. 3135 033 20301
0021 Mirror, 55W LCoS 3135 034 90124
0023 Shield, Light. 3135 034 04241
0024 Stud, Adjusting, f/Light Engine (3 used) 3135 030 40281
0025 Bracket, Adjust. 3135 031 10021
0030 Cabinet Front Asm., LCoS 55W 3135 037 54271
0032 Cabinet Top, 55W 3135 037 54281
0034 Upper Backcover, 55W 3135 037 51543
0036 Lower Backcover, 55W 3135 037 51553
0038 Cabinet Base, 55W. 3135 034 04291
0039 Baffle, Speaker, 55W Asm.. . . . . 3135 037 53491
0065 Philips Wordmark 3135 030 00391
0067 Label, Rear Jack Panel 3135 037 54291
0069 Label, Rear Center Channel Sw. 3135 030 00361
0071 Label, Rear Center Channel Sw. 3135 030 00361
0075 Vertical Rail, Left Side, LCoS 55W . . . 3135 031 20374
0076 Vertical Rail, Right Side, LCoS 55W. . . 3135 031 20384
0077 Rail, Screen, Horizontal, LCoS 55W . . . 3135 031 20364
0078 Support Bracket, Mirror Top (2 used) . . 3135 034 01501
0079 Support Bracket, Mirror Right. 3135 034 01511
0080 Support Bracket, Mirror Left 3135 034 01521
0090 Bracket Left, Cabinet Support. 3135 031 20274
0091 Bracket Right, Cabinet Support 3135 031 20264
0092 Rail Support Bracket 3135 031 20491
0093 Support, Back. 3135 034 01421
0096 Door, Lamp Access. 3135 034 04271
0098 Filter Assembly. 3135 037 51811
0106 Rail, System Asm. Left 3135 031 20332
0107 Rail, System Asm. Right. 3135 031 20342
0124 Customer Control Housing 3135 037 71441
0127 Frame, f/Side Jack Panel 3135 037 51615
0132 Frame, f/LED Sensor Panel. 3135 034 01872
0144 Cup, Mountiing (2 used). 3135 030 40151
0145 Cup, Mountiing (2 used). 3135 030 40151
0167 Documentation, Quick Use Guide, English. 3135 035 22913
0168 Documentation, Owner's Manual, English . 3135 035 22903
0178 Philips Product Reg. Card. 3121 233 46091
0193 Option Code Lable, LCoS. 3135 035 21852
0323 Washer, Flat, f/Light Eng. Adj. Studs (6 used). 3135 030 40171
0324 Nut, M5, f/Light Eng. Adj. Studs (3 used) 3135 030 40181
1085 Remote Transmitter, RC4336/01. . . . . 3139 238 07841
5213 Speaker, 8 ohm, 25W, Woofer (2 used). . 2422 264 00504
S 8190 Mainscord, USA, 7A, 2M4, VH BK 2422 070 98164
8610 Cable, DVI-D/450/DVI-D 3135 031 02121

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-10-2004
Rev. Date: 08-10-2004
Print Date: 2004-08-10

Return to Index

PARTS LIST
55PL9774

Lamp Driver Panel Parts

3D Comb Filter Panel Parts
Main Power Panel Parts
Rear Jack Panel Parts
System Panel Parts
LED Sensor Panel Parts
Side Jack Panel Parts
LED/Keyboard Panel Parts
Thermal Sensor Panel Parts
Input Power Panel Parts
Audio Amp Panel Parts
DW PIP Panel Parts
SSB Panel Parts
Scaler Board MSB Panel Parts
Cabinet & Accessory Parts

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LAMP DRIVER PANEL

LAMP DRIVER PANEL
LAMP DRIVER PANEL. 9137 001 77405

3D Comb Filter Panel Parts

3D Comb Filter Panel Parts

1153	3D Comb Panel Asm.	3135 037 10261
0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHz	2422 543 01273
1008	Connector, 9 Pin	2422 025 17802
1009	Connector, 9 Pin	2422 025 17802
2000	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16v, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass . .	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass . .	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass . .	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass . .	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3103	PTC, 6V, 1R3	2122 662 00139
3104	PTC, 6V, 1R3	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5003	Filter, Fixed, 14M3.	2422 549 44784
5004	Filter, Fixed, 14M3.	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	Filter, Fixed, 14M3.	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, VS, TLMH3100.	9322 072 71685

S = Safety Part Be sure to use exact replacement part.

6004	Diode, Rect, S1D.	9322 128 69685	
6005	Diode, Rect, S1D.	9322 128 69685	
6006	Diode, Signal, 1PS76SB10	9340 453 90115	
6007	Diode, Signal, BAS17	9335 262 30215	
7000	Transistor, NPN, BC847B.	9335 895 90215	
7001	Transistor, PNP, BC857B.	9335 897 60215	
7002	Transistor, NPN, BF570	9338 144 20215	
7003	Transistor, PNP, BC857B.	9335 897 60215	
7004	Transistor, NPN, BC847B.	9335 895 90215	
7005	Transistor, PNP, BC857B.	9335 897 60215	
7006	Transistor, NPN, BF570	9338 144 20215	
7007	Transistor, PNP, BC857B.	9335 897 60215	
7008	Transistor, NPN, BC847B.	9335 895 90215	
7009	Transistor, PNP, BC857B.	9335 897 60215	
7010	Transistor, NPN, BC847B.	9335 895 90215	
7011	Transistor, NPN, BC847B.	9335 895 90215	
7012	Transistor, PNP, BF550	9334 509 00215	
7015	Transistor, NPN, BC847B.	9335 895 90215	
7016	Transistor, PNP, BC857B.	9335 897 60215	
7017	Transistor, NPN, BC847B.	9335 895 90215	
7019	IC, LM809M3-3.08	9322 163 48668	
7020	Transistor, NPN, BC847B.	9335 895 90215	
7021	IC, LD1117DT33	9322 134 45668	
7022	IC, LD1117DT25	9322 160 50668	
7023	IC, UPD64083GF	9322 170 65671	

Main Power Panel Parts

	Main Power Panel Parts		
0218	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0219	Clip, Transistor	3135 011 02681	
0220	Spring Clip.	3139 121 24583	
0221	Spring Clip.	3139 121 24583	
0300	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0301	Clip, Transistor	3135 011 02681	
0302	Spring Clip.	3139 121 24583	
0305	Spring Clip.	3139 121 24583	
0306	Spring Clip.	3139 121 24583	
1206	Connector, 1 Pin	2422 015 18552	
1218	Heatsink	3135 031 60071	
1219	Heatsink, Dual TO-220.	3135 031 60133	
1300	Heatsink	3135 031 60071	
1302	Heatsink, Dual TO-220.	3135 031 60133	
1305	Heatsink, Dual TO-220.	3135 031 60133	
1311	Connector, 6 Pin, BM, V, M	2422 025 14044	
1312	Connector, 7 Pin	2422 025 11244	
1313	Connector, 8 Pin, BM, V, M	2422 025 10648	
1314	Connector, 9 Pin, BM, V, M	2422 025 12827	
1315	Connector, 10 Pin, BM, V, M.	2422 025 15085	
2220	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2221	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2222	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2223	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2226	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2233	Cap, 330p, 10%, 1KV, Ceramic	3198 019 63310	
2235	Cap, 1n, 10%, 1KV, Ceramic	3198 019 51020	
2236	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2237	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2238	Cap, 3300u, 20%, 16V, Electrolytic	2020 021 91816	
2239	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2240	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2241	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2243	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2244	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2245	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2246	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2247	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2265	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2310	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2312	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2320	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2321	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2323	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2333	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2335	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2336	Cap, 4n7, 10%, 400V, Metalized Polyester	2222 365 55472	
2337	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2338	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2339	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2340	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2341	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2342	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2343	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2344	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2345	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2347	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2348	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2349	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2350	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2351	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2352	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2353	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2354	Cap, 22u, 20%, 100V, Electrolytic.	2020 021 91813	
2355	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2356	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2357	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2358	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2360	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2361	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2362	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2363	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2364	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2365	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2366	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2367	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
3221	Res, 33K, 5%, 1W, Metal Film	3198 012 13330	
3222	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3223	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3224	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3226	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3227	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3228	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3229	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790	
3230	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3231	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3233	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080	
3237	Res, 10K7, 1%, 3/5W, Metal Film.	2312 915 11073	
3238	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3252	Res, 22 ohm, 1%, 3/5W, Metal Film.	2312 915 12209	
3253	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3254	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	
3255	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3256	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3257	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3259	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3260	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	
3321	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
3322	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3323	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3324	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3325	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3326	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3327	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3328	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	
3329	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	
3330	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	
3331	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710	
3332	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630	
3333	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	
3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3335	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3338	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3339	Res, 1K, 5%, 1 1/3W, Metal Film.	3198 012 21020	
3340	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
S 3341	Res, 680 ohm, 5%, 3W, Metal Film	3198 012 36810	
3342	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3343	Res, 1K8, 1%, 1/10W, Metalized Glass	2120 108 92618	
3344	Res, 750K, 1%, 3/5W, Metal Film.	2312 915 17504	
3345	Res, 27K, 1%, 1/8W, Metalized Glass.	2322 734 62703	
3346	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3347	Res, 10 ohm, 5%, 1W, Metal Film.	3198 012 11090	
3348	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3349	Res, 0R47, 5%, 3/5W, Metal Film.	3198 012 14770	
3350	Res, 8R2, 5%, 1/4W, Carbon Film.	2120 101 74828	
3351	Res, 0R1, 5%, 1 1/3W, Metal Film	3198 012 21070	
3352	Res, 2K7, 1%, 3/5W, Metal Film	2312 915 12702	
3353	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3354	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3355	Res, 150K, 5%, 1/6W, Carbon Film	3198 011 01540	
3356	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3357	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3358	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3359	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	
S 5201	Line Filter, 100uH, 2.2A	2422 549 44101	
5208	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5209	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5210	Switching Transformer, US28207-00.	2422 531 02555	
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5213	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5215	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5216	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5217	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5301	Line Filter, 100uH, 2.2A	2422 549 44101	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5308	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5309	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5310	Switching Transformer, US28212-02.	2422 531 02594	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	

S = Safety Part Be sure to use exact replacement part.

	5316	Coil, 10u.	2422 535 94639
	5317	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5320	Coil, 10u.	2422 535 94639
	5321	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5322	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5325	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5326	Coil, 10u.	2422 535 95363
	5327	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
	5328	Coil, 330u	2422 535 94863
	6201	Diode, Rect, BY229X-800	9340 380 30127
	6202	Zener Diode, 5.1 volt.	3198 010 55180
	6202	Zener Diode, 5.1 volt.	3198 010 55180
	6204	Diode, Rect., PBYR10100X.	9340 555 24127
	6205	Diode, Rect, BYV95C	9335 001 80133
S	6207	IC, Optocoupler.	9338 941 50682
	6209	Diode, Signal, BAV21	3198 010 10070
	6301	Diode, Rect, BY229X-800	9340 380 30127
	6305	Diode, Rect, BYV95C	9335 001 80133
	6306	Diode, Signal, BAV21	3198 010 10070
S	6307	IC, Optocoupler.	9338 941 50682
	6308	Zener Diode, 5.1 volt.	3198 010 55180
	6309	Diode, Signal, BAV21	3198 010 10070
	6312	Diode, Rect, SB360L-7024	9322 161 78682
	6313	Diode, Rect, BYV95C	9335 001 80133
	6314	Diode, Rect, BYW29EX-200.	9340 412 80127
	6315	Diode, Rect., PBYR10100X.	9340 555 24127
	6316	Diode, Rect, BYW95C-24.	9340 559 53112
	7202	IC, PWM Off-line Switcher.	9322 166 44687
	7203	Transistor, N Ch. FET, 2SK2886	9322 199 01687
	7206	IC, Prog. Ref. Regulator	9322 115 98676
	7209	IC, Prog. Ref. Regulator	9322 115 98676
	7210	Transistor, PNP, BC557B.	3198 020 40110
	7211	Transistor, NPN, BC547B.	3198 020 40030
	7302	IC, PWM Off-line Switcher, TOP247Y	9322 181 88687
	7303	Transistor, N Ch. FET, 2SK2886	9322 199 01687
	7304	IC, Prog. Ref. Regulator	9322 115 98676
	7306	IC, Prog. Ref. Regulator	9322 115 98676
	7307	IC, Inverting Step Switch Reg., MC34063A	9322 036 71682
	7308	Transistor, P Ch. FET, 2SJ334.	9322 199 02687
	7309	IC, Prog. Ref. Regulator	9322 115 98676
	7310	Transistor, PNP, BC557B.	3198 020 40110
	9001	Wire Jumper, 0.58MM.	3198 036 90010
	9003	Wire Jumper, 0.58MM.	3198 036 90010
	9005	Wire Jumper, 0.58MM.	3198 036 90010
	9012	Wire Jumper, 0.58MM.	3198 036 90010
	9013	Wire Jumper, 0.58MM.	3198 036 90010
	9014	Wire Jumper, 0.58MM.	3198 036 90010
	9016	Wire Jumper, 0.58MM.	3198 036 90010
	9017	Wire Jumper, 0.58MM.	3198 036 90010
	9018	Wire Jumper, 0.58MM.	3198 036 90010
	9019	Wire Jumper, 0.58MM.	3198 036 90010
	9020	Wire Jumper, 0.58MM.	3198 036 90010
	9024	Wire Jumper, 0.58MM.	3198 036 90010
	9025	Wire Jumper, 0.58MM.	3198 036 90010
	9026	Wire Jumper, 0.58MM.	3198 036 90010
	9028	Wire Jumper, 0.58MM.	3198 036 90010
	9029	Wire Jumper, 0.58MM.	3198 036 90010
	9030	Wire Jumper, 0.58MM.	3198 036 90010
	9031	Wire Jumper, 0.58MM.	3198 036 90010
	9032	Wire Jumper, 0.58MM.	3198 036 90010
	9033	Wire Jumper, 0.58MM.	3198 036 90010
	9317	Wire Jumper, 0.58MM.	3198 036 90010
	9318	Wire Jumper, 0.58MM.	3198 036 90010
	1010	Main Power Supply Panel Asm.	3135 037 10663

Rear Jack Panel Parts

Rear Jack Panel Parts

	1016	Rear Jack Panel Asm.	3135 037 10692
	1200	Connector, 4 Pin	2422 025 12479
	1201	Connector, 4 Pin	2422 025 12479
	1202	Connector, 4 Pin	2422 025 12479
	1203	Connector, 4 Pin	2422 025 12479
	1205	Connector, 3 Pin	2422 025 09191
	1207	Connector, 5 Pin	2422 025 12481
	1208	Connector, 5 Pin	2422 025 12481
	1214	Socket, Cinch, 4 Pin	2422 026 05093
	1217	Socket, Cinch, 1 Pin	2422 026 04378
	1218	Socket, MDIN, 10 Pin	2422 026 04926
	1219	Socket, MDIN, 10 Pin	2422 026 04926
	1220	Connector, 64 Pin.	2422 025 17714
	1251	Socket, Cinch, 12 Pin.	2422 026 05106
	2111	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2112	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2113	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
	2114	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2115	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2116	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2117	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2118	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2119	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2120	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
	2121	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2122	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2123	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2124	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
	2149	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
	2150	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
	2151	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2152	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2153	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2154	Cap, 100n, +80/-20%, 50v, Ceramic.	2020 552 95499
	2155	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2156	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2157	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2158	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2159	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2160	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2161	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2162	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
	2163	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2164	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2165	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
	2166	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
	2167	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
	2168	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2169	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2170	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2171	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2173	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2174	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2175	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2176	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2177	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2178	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
	2180	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2182	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2183	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2184	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2185	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2186	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2187	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2188	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	2189	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
	3117	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3118	Res, 30K, 1%, 1/8W, Metalized Glass.	2322 734 63003
	3119	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3120	Res, 51K, 1%, 1/8W, Metalized Glass.	2322 734 65103
	3121	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3122	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
	3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3125	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3128	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3129	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3130	Res, 1 ohm, 5%, 1/10W, Metalized Glass	3198 021 51080
	3131	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3133	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
	3134	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3136	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3137	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3139	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3140	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3141	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3142	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
	3143	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
	3144	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3145	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3155	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
	3156	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3157	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3158	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3159	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3160	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3161	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
	3162	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3173	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
	3174	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3175	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3176	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3181	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3182	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3183	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3184	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
	3185	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3186	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3187	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

3188 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3189 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3190 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3191 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3192 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3193 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3220 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3221 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3222 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3223 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3224 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3225 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3226 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3227 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3228 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3229 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3230 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3231 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3232 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3233 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3234 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3235 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3237 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3238 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3243 Res, 68 ohm, 5%, 1/10W, Metalized Glass. 3198 021 56890
3244 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3245 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3246 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3247 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3248 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
4000 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4004 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4005 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4006 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4007 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4008 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4009 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4010 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4011 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4012 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4013 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4014 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4015 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4016 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4017 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4018 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4019 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4020 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4021 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4022 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4023 Res, Zero ohm, "Chip" Jumper 3198 021 90020
6101 Zener Diode, 6.8 volt. 3198 020 56880
6102 Zener Diode, 6.8 volt. 3198 020 56880
6103 Zener Diode, 6.8 volt. 3198 020 56880
6104 Zener Diode, 6.8 volt. 3198 020 56880
6105 Zener Diode, 6.8 volt. 3198 020 56880
6106 Zener Diode, 6.8 volt. 3198 020 56880
6107 Zener Diode, 6.8 volt. 3198 020 56880
6108 Zener Diode, 6.8 volt. 3198 020 56880
6109 Zener Diode, 6.8 volt. 3198 020 56880
6110 Zener Diode, 6.8 volt. 3198 020 56880
6111 Zener Diode, 6.8 volt. 3198 020 56880
6112 Zener Diode, 6.8 volt. 3198 020 56880
6113 Zener Diode, 6.8 volt. 3198 020 56880
6114 Zener Diode, 6.8 volt. 3198 020 56880
6115 Zener Diode, 6.8 volt. 3198 020 56880
6116 Zener Diode, 6.8 volt. 3198 020 56880
6117 Zener Diode, 6.8 volt. 3198 020 56880
6118 Zener Diode, 6.8 volt. 3198 020 56880
6119 Zener Diode, 6.8 volt. 3198 020 56880
6120 Zener Diode, 6.8 volt. 3198 020 56880
6121 Diode, Signal, BAV99 . . . . . 9332 153 70215
6122 Diode, Signal, BAV99 . . . . . 9332 153 70215
6123 Diode, Signal, BAV99 . . . . . 9332 153 70215
6124 Diode, Signal, BAV99 . . . . . 9332 153 70215
6125 Diode, Signal, BAV99 . . . . . 9332 153 70215
6126 Diode, Signal, BAV99 . . . . . 9332 153 70215
6128 Diode, Signal, BAV99 . . . . . 9332 153 70215
6129 Diode, Signal, BAV99 . . . . . 9332 153 70215
6130 Diode, Signal, BAV99 . . . . . 9332 153 70215
6132 Diode, Signal, BAV99 . . . . . 9332 153 70215
6161 Zener Diode, 6.8 volt. 3198 020 56880
6162 Zener Diode, 6.8 volt. 3198 020 56880
7100 IC, CXA2089S 9322 162 27682
7102 Transistor, NPN, BC847B. 3198 010 42030
7105 Transistor, NPN, BC847B. 3198 010 42030
7107 Transistor, NPN, BC847B. 3198 010 42030
7108 Transistor, NPN, BC847B. 3198 010 42030
7109 Transistor, NPN, BC847B. 3198 010 42030
7110 Transistor, NPN, BC847B. 3198 010 42030
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9004 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9006 Wire Jumper, 0.58MM. 3198 036 90010
9007 Wire Jumper, 0.58MM. 3198 036 90010
9008 Wire Jumper, 0.58MM. 3198 036 90010
9009 Wire Jumper, 0.58MM. 3198 036 90010
9010 Wire Jumper, 0.58MM. 3198 036 90010
9100 Wire Jumper, 0.58MM. 3198 036 90010
9101 Wire Jumper, 0.58MM. 3198 036 90010
9102 Wire Jumper, 0.58MM. 3198 036 90010
9103 Wire Jumper, 0.58MM. 3198 036 90010
9104 Wire Jumper, 0.58MM. 3198 036 90010
9105 Wire Jumper, 0.58MM. 3198 036 90010
9106 Wire Jumper, 0.58MM. 3198 036 90010
9107 Wire Jumper, 0.58MM. 3198 036 90010
9108 Wire Jumper, 0.58MM. 3198 036 90010
9109 Wire Jumper, 0.58MM. 3198 036 90010
9110 Wire Jumper, 0.58MM. 3198 036 90010
9111 Wire Jumper, 0.58MM. 3198 036 90010
9112 Wire Jumper, 0.58MM. 3198 036 90010
9113 Wire Jumper, 0.58MM. 3198 036 90010
9114 Wire Jumper, 0.58MM. 3198 036 90010
9115 Wire Jumper, 0.58MM. 3198 036 90010
9116 Wire Jumper, 0.58MM. 3198 036 90010

System Panel Parts

System Panel Parts
1020 System Panel Asm.. . . . . 3135 037 10712
1008 Connector, 9 Pin 2422 025 16049
1009 Connector, 9 Pin 2422 025 16049
1200 Connector, 5 Pin 2422 025 12481
1201 Connector, 10 Pin. 2422 025 12484
1202 Switch, Tactile. 2422 128 02742
1203 Tuner, V+U PLL 2422 542 90077
1204 Switch, Tactile. 2422 128 02742
1205 Connector, SIMM, 80 Pin. 2422 025 16599
1207 Connector, 4 Pin 2422 025 12479
1210 Connector, 64 Pin. 2422 025 17715
1214 Connector, 10 Pin. 2422 025 12484
1215 Connector, 1 Pin 2422 015 18552
1216 Connector, 1 Pin 2422 015 18551
1217 Connector, 1 Pin 2422 015 18552
1218 Connector, 1 Pin 2422 015 18552
1220 Connector, 64 Pin. 2422 025 17715
1241 Connector, 7 Pin 2422 025 11244
1244 Connector, 3 Pin 2412 020 00725
1251 Connector, 3 Pin 2412 020 00725
1252 Connector, 6 Pin 2422 025 17955
1262 Connector, 3 Pin 2422 025 10768
1303 Connector, 5 Pin 2422 025 10428
1305 Connetort, 7 Pin 2422 025 09407
1312 Connector, 7 Pin 2422 025 11244
1313 Connector, 8 Pin 2422 025 10648
1314 Connector, 9 Pin 2422 025 12827
1335 Connector, 11 Pin. 2422 025 12485
1337 Connector, 1 Pin 2422 015 18552
1344 Connector, 5 Pin 2422 025 12481
1403 Connector, 12 Pin. 2422 025 08333
1600 Resonator Crystal, 12Mhz, 20P, DSX840 R. 2422 543 01095
1681 Connector, 3 Pin 2422 025 10768
1683 Connector, 5 Pin, FFC 0.3. . . . . 2422 025 16563
1700 Connector, 8 Pin 2422 025 12483
2101 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2102 Cap, 100u, 20%, 50v, Electrolytic. . . . 3198 025 51010
2103 Cap, 220u, 20%, 16v, Electrolytic. . . . 3198 025 22210
2104 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2105 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2106 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2107 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2108 Cap, 2u2, 20%, 25v, Electrolytic 2020 021 91551
2109 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2110 Cap, 470u, 20%, 16v, Electrolytic. . . . 2020 021 91687
2111 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2112 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2113 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2114 Cap, 1000u, 20%, 16v, Electrolytic . . . 3198 026 21020
2115 Cap, 2u2, 20%, 10v, Electrolytic 2020 021 91668
2116 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2117 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2118 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2119 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2120 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2121 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2122 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2123 Cap, 330u, 20%, 16v, Electrolytic. . . . 2020 021 91536
2124 Cap, 470u, 20%, 10v, Electrolytic. . . . 2020 021 91569
2125 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2126 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020

S = Safety Part Be sure to use exact replacement part.

2127 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2129 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2130 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2201 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2202 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2203 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2204 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2205 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2206 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2207 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2208 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2209 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2210 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2211 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2212 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2213 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2214 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2215 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2216 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2218 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2219 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2301 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2302 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2303 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2306 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2307 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2308 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2309 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2312 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2313 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2314 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2315 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2316 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2317 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2318 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2319 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2320 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2321 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2322 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2323 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2324 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2325 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2326 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2327 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2328 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2329 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2330 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2331 Cap, 22n, +80/-20%, 50v, Ceramic 3198 017 22230
2332 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2333 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2334 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2335 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2336 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2337 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2338 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2339 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2340 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2341 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2342 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2343 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2344 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2345 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2347 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2348 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2349 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2350 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2351 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2352 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2353 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2354 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2355 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2356 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2357 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2358 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2359 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2360 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2361 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2362 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2363 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2364 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2365 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2366 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2367 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2368 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2369 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2370 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2371 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2372 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2374 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2375 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2376 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2377 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2378 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2379 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2380 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2381 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2382 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2383 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2384 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2385 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2386 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2387 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2388 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2389 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2390 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2391 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2392 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2393 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2394 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2395 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2396 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
3101 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3102 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3106 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3108 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3109 Res, 10K, 1%, 1/8W, Metalized Glass. . . 2322 734 61003
3110 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3111 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3112 Res, 120K, 1%, 1/8W, Metalized Glass . . 2322 734 61204
3113 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3118 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3119 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3120 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3121 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3122 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3201 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3202 Res, 3K9, 5%, 1/10W, Metalized Glass . . 3198 021 53920
3203 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3204 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3205 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3206 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3207 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3208 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3209 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3210 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3211 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3212 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3213 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3214 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3215 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3216 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3217 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3218 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3219 Res, 270 ohm, 5%, 1/10W, Metalized Glass 3198 021 52710
3220 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3221 Res, 27K, 5%, 1/10W, Metalized Glass . . 3198 021 52730
3222 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3223 Res, 180 ohm, 5%, 1/10W, Metalized Glass 3198 021 51810
3224 Res, 330 ohm, 5%, 1/10W, Metalized Glass 3198 021 53310
3225 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3226 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3227 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3228 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3229 Res, 22 ohm, 5%, 1/10W, Metalized Glass. 3198 021 52290
3230 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3231 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3232 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3234 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3235 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 2322 734 66801
3236 Res, 560 ohm, 5%, 1/10W, Metalized Glass 3198 021 55610
3237 Res, 1K2, 1%, 1/8W, Metalized Glass. . . 2322 734 61202
3238 Res, 220K, 5%, 1/10W, Metalized Glass. . 3198 021 52240
3239 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3240 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3241 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3242 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3243 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 2322 734 62202
3305 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3306 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3307 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3308 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3309 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3310 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3311 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3312 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3313 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3314 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3315 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3316 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3317 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320

S = Safety Part Be sure to use exact replacement part.

3318 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3319 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3320 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3321 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3323 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3324 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3325 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3326 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3328 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3329 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3330 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3331 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3332 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3333 Res, 33 ohm, 5%, 1/10W, Metalized Glass. 3198 021 53390
3334 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3335 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3336 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3337 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3338 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3339 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3340 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3341 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3342 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3343 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3344 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3345 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3346 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3347 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3348 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3349 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3350 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3351 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3352 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3353 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3354 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3355 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3356 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3357 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3358 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3359 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3360 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3361 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3362 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3363 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3364 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3365 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3366 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3370 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3371 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3372 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3373 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3374 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3375 Res, 15K, 5%, 1/10W, Metalized Glass . . 3198 021 51530
3376 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3377 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3378 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3379 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3380 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3381 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3382 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3383 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3384 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3385 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3390 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3391 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3392 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3393 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3394 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3395 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3396 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
4104 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4105 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4106 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4107 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4108 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4109 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4110 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4118 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4119 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4120 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4121 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4129 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5101 Coil, 6u8. . . . . 2422 535 94819
5102 Coil, 1u 2422 535 95387
5103 Coil, 1u 2422 535 95387
5104 Coil, 1u 2422 535 95387
5106 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5107 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5108 Coil, 1u 2422 535 95387
5109 Coil, 1u 2422 535 95387
5110 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5111 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5112 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5113 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5301 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5302 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5303 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5304 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5305 Coil, 2u2. . . . . 3198 018 42280
5306 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5307 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5308 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5309 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5310 Coil, 8u2. . . . . 3198 018 28280
5311 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5312 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5313 Coil, 330u 2422 535 94649
5315 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5316 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5317 Coil, 8u2. . . . . 2422 535 96517
6101 Diode, Signal, BAS316. . . . . 3198 010 10630
6102 Diode, Signal, BAS316. . . . . 3198 010 10630
6103 Diode, Signal, BAS316. . . . . 3198 010 10630
6104 Diode, Signal, BAS316. . . . . 3198 010 10630
6105 Diode, Rect, SB140. . . . . 9339 577 60673
6106 Diode, Signal, BAS316. . . . . 3198 010 10630
6107 Diode, Signal, BAS316. . . . . 3198 010 10630
6108 Diode, Signal, BAS316. . . . . 3198 010 10630
6109 Diode, Signal, BAS316. . . . . 3198 010 10630
6110 Diode, Signal, BAS316. . . . . 3198 010 10630
6111 Diode, Signal, BAS316. . . . . 3198 010 10630
6112 Zener Diode, 15 volt 9335 006 90133
6113 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6114 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6201 Zener Diode, 6.8 volt. 9340 548 55115
6202 Zener Diode, 6.8 volt. 9340 548 55115
6300 Diode, Signal, BAS316. . . . . 3198 010 10630
6301 Diode, Signal, BAS316. . . . . 3198 010 10630
6302 Diode, Signal, BAS316. . . . . 3198 010 10630
6304 Diode, Signal, BAS316. . . . . 3198 010 10630
6305 Diode, Signal, BAS316. . . . . 3198 010 10630
6306 Diode, Signal, BAS316. . . . . 3198 010 10630
7001 Transistor, NPN, BC847B. 3198 010 42030
7002 Transistor, NPN, BC847B. 3198 010 42030
7003 Transistor, NPN, BC847B. 3198 010 42030
7004 Transistor, NPN, BC847B. 3198 010 42030
7005 Transistor, PNP, BC857B. 3198 010 42150
7006 Transistor, PNP, BC857B. 3198 010 42150
7007 Transistor, PNP, BC857B. 3198 010 42150
7008 Transistor, NPN, BC847B. 3198 010 42030
7009 Transistor, NPN, BC847B. 3198 010 42030
7010 Transistor, NPN, BC847B. 3198 010 42030
7011 Transistor, NPN, BC847B. 3198 010 42030
7012 Transistor, NPN, BC847B. 3198 010 42030
7013 Transistor, PNP, BC857B. 3198 010 42150
7014 F.E.T. STD3NK60Z. 9322 195 38668
7015 Transistor, PNP, BC857B. 3198 010 42150
7017 Transistor, PNP, BC857B. 3198 010 42150
7018 Transistor, NPN, BC847B. 3198 010 42030
7020 Transistor, NPN, BC847B. 3198 010 42030
7021 Transistor, NPN, BC847B. 3198 010 42030
7022 Transistor, NPN, BC847B. 3198 010 42030
7023 Transistor, NPN, BC847B. 3198 010 42030
7024 Transistor, PNP, BC857B. 3198 010 42150
7025 Transistor, NPN, BC847B. 3198 010 42030
7101 IC, TC74HC590AF-EL 9322 167 76668
7102 IC, TC74HC590AF-EL 9322 167 76668
7103 IC, CY7C199-15ZC 9322 153 66668
7104 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7105 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7106 IC, CD74ACT151M. 9322 195 64668
7107 IC, M24C32-WMN6. . . . . 9322 124 74668
7108 IC, P89C668HBA/00. . . . . 9352 654 18112
7109 IC, TL431BCLP. 9322 115 98676
7110 IC, TLC0832CD. 9322 185 44668
7111 IC, NE555D 9336 561 10623
7113 IC, TEA6422D 9322 116 87668
7114 IC, PCF8574T 9337 280 80118
7115 IC, TL431BCLP. 9322 115 98676
7116 IC, TDA7309D 9322 110 45668
7117 IC, TDA1308T/N1. . . . . 9350 721 10115
7118 IC, NE555D 9336 561 10623
7120 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
7121 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010

LED Sensor Panel Parts

LED Sensor Panel Parts

S = Safety Part Be sure to use exact replacement part.

1024 LED Panel Asm.	3135 037 10741
0207 Holder, LED.	3139 124 23831
0209 Holder, Photo Diode.	3104 304 19732
1201 Connector, 4 Pin	2422 025 12489
1214 Connector, 10 Pin.	2422 025 12493
2001 Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2002 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2003 Cap, 100u, 20%, 10v, Electrolytic.	3198 025 11010
2004 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
3001 Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3002 Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3003 Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3004 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3005 Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3006 Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3007 Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3008 Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3009 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3010 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3011 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3012 Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3013 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3016 Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4004 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4005 Res, Zero ohm, "Chip" Jumper	3198 021 90030
6000 LED, TLUV5300.	9338 792 00682
6003 IR Receiver, TSOP2136UH1	9322 159 21667
6004 Optical Sensor, BPW46.	9322 032 38682
7000 IC, LM358DR2	9339 265 90668
7001 Transistor, NPN, BC847B.	3198 010 42030

Side Jack Panel Parts

Side Jack Panel Parts

1028 Side Jack Panel Asm.	3135 037 10751
1300 Switch, Push, 2 Pin, 2 Position, 30v	2422 128 03068
1301 Socket, MDin, 4 Pin, TCS7959 Y	2422 026 05157
1302 Socket, Cinch, 3 Pin	2422 026 05493
1303 Socket, Phone, 1 Pin	2422 026 04747
1335 Connector, 11 Pin.	2422 025 12485
1337 Connector, 1 Pin	2422 015 18552
1344 Connector, 5 Pin	2422 025 12481
2107 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2108 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2109 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2110 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2111 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2112 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2113 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2114 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2115 Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
3106 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3115 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3116 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3117 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3119 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3120 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3121 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3122 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3123 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3124 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3125 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001 Coil, 270n	3198 018 32770
5002 Coil, 270n	3198 018 32770
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 Zener Diode, 6.8 volt.	9340 386 40115
6004 Zener Diode, 6.8 volt.	9340 386 40115
6005 Zener Diode, 6.8 volt.	9340 386 40115
6006 Zener Diode, 6.8 volt.	9340 386 40115
6007 Zener Diode, 6.8 volt.	9340 386 40115
6008 Zener Diode, 6.8 volt.	9340 386 40115
6009 Zener Diode, 6.8 volt.	9340 386 40115
6010 Zener Diode, 6.8 volt.	9340 386 40115
6011 Zener Diode, 6.8 volt.	9340 386 40115
6012 Zener Diode, 6.8 volt.	9340 386 40115

LED/Keyboard Panel Parts

LED/Keyboard Panel Parts

1032 LED/Keyboard Panel Asm..	3135 037 10771
1001 Switch, Tactile.	2422 128 02742
1002 Switch, Tactile.	2422 128 02742
1003 Switch, Tactile.	2422 128 02742
1004 Switch, Tactile.	2422 128 02742
1005 Switch, Tactile.	2422 128 02742
1006 Switch, Tactile.	2422 128 02742
1201 Connector, 4 Pin	2422 025 12489
1202 Connector, 1 Pin	2422 015 18551
1203 LED, Holder (Not Shown).	3135 034 00711
3001 Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322 734 63901
3002 Res, 200 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62001
3003 Res, 620 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66201
3004 Res, 1K1, 1%, 1/8W, Metalized Glass.	2322 734 61102
3006 Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3007 Res, 2K4, 1%, 1/8W, Metalized Glass.	2322 734 62402
3009 Res, 910 ohm, 1%, 1/8W, Metalized Glass.	2322 734 69101
3010 Res, 160 ohm, 1%, 1/8W, Metalized Glass.	2322 734 61601
3011 Res, 120 ohm, 5%, 1/10W, Metalized Glass	3198 021 51210
4000 Res, Zero ohm, "Chip" Jumper	3198 021 90020
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 LED, TLHB5400.	9322 188 10682
7000 Transistor, NPN, BC847B.	3198 010 42030

Thermal Sensor Panel Parts

Thermal Sensor Panel Parts

1034 Thermal Sensor Panel Asm..	3135 037 10781
1202 Connector, 3 Pin	2422 025 10775
2001 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2002 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3001 Res, 5K6, 1%, 1/8W, Metalized Glass.	2322 734 65602
3002 Res, 68K, 1%, 1/8W, Metalized Glass.	2322 734 66803
3003 Res, 820 ohm, 1%, 1/8W, Metalized Glass.	2122 118 05988
3004 Res, 680 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66801
3005 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
S 3006 NTC, 10K, 5%, 1/2W	2322 640 33103
3007 Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3008 Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
7001 Transistor, NPN, BC847B.	3198 010 42030
7002 Transistor, NPN, BC847B.	3198 010 42030

Input Power Panel Parts

Input Power Panel Parts

1045 Input Power Panel Asm.	3135 037 11421
0001 Insulator, SP-900.	3135 010 02331
0002 Clip, Transistor	3135 011 02681
0013 Spring	3139 121 24583
0014 Spring	3139 121 24583
0018 Insulator, SP-900.	3135 010 02331
0019 Clip, Transistor	3135 011 02681
0020 Spring	3139 121 24583
0201 Spring	3135 011 01041
0215 Insulator.	3135 010 02321
1206 Connector, 1 Pin	2422 015 18552
1208 Surge Protector, DSP-501N-A21F	2422 549 42349
1209 Connector, 1 Pin	2422 015 18552
S 1210 Relay, 1 Pin, 5V, 5A	2422 132 07411
S 1211 Fuse/Clip, 6A3, 250V, IEC.	2422 093 00036
1212 Connector, 4 Pin	2422 025 15503
S 1214 Protection Device, 5.5 KVDC, UL5500.	2422 549 43369
1215 Heatsink	3135 031 60051
1217 Connector, 1 Pin	2422 015 18552
1218 Connector, 1 Pin	2422 015 18552
1310 Connector, 2 Pin	2422 025 11196
1311 Connector, 6 Pin	2422 025 14044
1316 Connector, 4 Pin	2422 025 10647
1401 Heatsink	3135 031 60071
1402 Heatsink, TO-220	3135 031 60133
1403 Connector, 12 Pin.	2422 025 08333
1410 Connector, 2 Pin	2412 020 00724
1460 Connector, 3 Pin	2412 020 00725
1518 Heatsink	3135 031 60071
1520 Heatsink, TO-220	3135 031 60133
2200 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2201 Cap, 220n, 20%, 275v, Metalized Polypropylene	2222 336 29146
2202 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2203 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2205 Cap, 680n, 20%, 275v, Metalized Polypropylene	2222 336 29149
2209 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2210 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2211 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2212 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
S 2213 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2214 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2215 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2216 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2217 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2219 Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759
S 2220 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2225 Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2249 Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 2421 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2423 Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
2424 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557

S = Safety Part Be sure to use exact replacement part.

2431	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2432	Cap, 1n, 10%, 1000v, Ceramic	3198 019	61020
2433	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
S 2435	Cap, 470p, 10%, 50v, Ceramic	2020 554	90169
2436	Cap, 47u, 20%, 50v, Electrolytic	2020 021	91521
2437	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2441	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2442	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2443	Cap, 4n7, 10%, 50v, Ceramic.	3198 019	14720
2444	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2453	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2454	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2456	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2457	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2472	Cap, 220u, 20%, 10v, Electrolytic.	3198 025	12210
2473	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2522	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2523	Cap, 470p, 10%, 50v, Ceramic	3198 019	14710
2530	Cap, 220p, 10%, 1000v, Ceramic	3198 019	62210
2534	Cap, 100u, 20%, 400v, Electrolytic	2020 021	91759
2535	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2536	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2541	Cap, 10u, 20%, 50v, Electrolytic	2020 021	91808
2542	Cap, 10n, +80/-20%, 50v, Ceramic	3198 019	21030
2543	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019	22230
2544	Cap, 47u, 20%, 16v, Electrolytic	2020 021	91804
3204	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242	13225
3207	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3210	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3211	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
S 3212	VDR, DC, 1MA/495V, MAX 850VB.	2322 595	90021
3213	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3214	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3215	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3216	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3217	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103	90042
3218	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3219	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3245	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021	53320
3246	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3247	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3248	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3249	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3252	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3253	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3403	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011	01230
3425	Res, 100 ohm, 5%, 3W, Metal Film	2120 105	93581
3426	Res, 56K, 1%, 3/5W, Metal Film	2312 915	15603
3429	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3430	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3431	Res, 56K, 5%, 1/6W, Carbon Film.	3198 011	05630
3432	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3433	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3438	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3441	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011	04720
3444	Res, 820K, 1%, 3/5W, Metal Film.	2312 915	18204
3445	Res, 100K, 1%, 3/5W, Metal Film.	2312 915	11004
3453	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3456	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3460	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3461	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3462	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021	54720
3463	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3464	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021	52720
3465	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021	53920
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3470	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011	04790
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3472	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3473	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3474	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3475	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3476	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3522	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3526	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3533	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3536	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011	01090
3537	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3538	Res, 1K, 1%, 3/5W, Metal Film.	2312 915	11002
3539	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3540	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3541	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3542	Res, 120K, 1%, 3/5W, Metal Film.	2312 915	11204
3543	Res, 3K, 1%, 1/8W, Metalized Glass	2322 734	63002
3544	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021	52230
5210	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5211	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5213	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5218	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5406	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5407	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5408	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5409	Coil, 1u	2422 535	95387
5410	Transformer, SMT Layer, US28206-01	2422 531	02553
5411	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5412	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5417	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5419	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5420	Coil, 1u	2422 535	95387
5422	Coil, 1u	2422 535	95387
5502	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5503	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5507	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5509	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5510	Coil, Choke, 190uH, UC28214-03 Y	2422 536	00594
5514	Filter, Mains, 100uH, 2A2, W8051	2422 549	44101
6200	Diode, Signal, 1N4148.	3198 010	10010
6201	Diode, Bridge Rect, GBU6JL-7002	9322 138	08667
6202	Diode, Bridge Rect, GBU4JL-7002	9322 132	55667
6402	Diode, Signal, 1N4148.	3198 010	10010
6403	Diode, Signal, BAS316.	3198 010	10630
6404	Optic Coupler, CQY80NG	9338 941	50682
6405	Diode, Rect, BYV95C	9335 001	80133
6406	Zener Diode, 18 volt	3198 010	21890
6407	Zener Diode, 6.8 volt.	3198 010	26880
6408	Diode, Signal, BAS316.	3198 010	10630
6409	Diode, Signal, 1N4148.	3198 010	10010
6410	Optic Coupler, CQY80NG	9338 941	50682
6411	Diode, Rect, BY229X-800	9340 380	30127
6413	Diode, Rect, BYW29EX-200.	9340 412	80127
6414	Diode, Rect, BYW29EX-200.	9340 412	80127
6501	Diode, Rect, BYV29F-400	9338 673	00127
7211	Transistor, NPN, BC547B.	3198 020	40030
7212	Transistor, PNP, BC857B.	3198 010	42150
7402	IC, TOP247Y.	9322 181	88687
7406	IC, TL431BCLP.	9322 115	98676
7408	Transistor, PNP, BC857B.	3198 010	42150
7409	Transistor, NPN, BC847B.	3198 010	42030
7410	Transistor, PNP, BC857B.	3198 010	42150
7411	Transistor, NPN, BC847B.	3198 010	42030
7412	Transistor, PNP, BC857B.	3198 010	42150
7500	Transistor, PNP, BC857B.	3198 010	42150
7502	IC, TOP247Y.	9322 181	88687
7506	IC, TL431BCLP.	9322 115	98676
9010	Wire Jumper, 0.58MM.	3198 036	90010
9011	Wire Jumper, 0.58MM.	3198 036	90010
9016	Wire Jumper, 0.58MM.	3198 036	90010
9020	Wire Jumper, 0.58MM.	3198 036	90010
9022	Wire Jumper, 0.58MM.	3198 036	90010
9023	Wire Jumper, 0.58MM.	3198 036	90010
9024	Wire Jumper, 0.58MM.	3198 036	90010
9025	Wire Jumper, 0.58MM.	3198 036	90010
9026	Wire Jumper, 0.58MM.	3198 036	90010
9027	Wire Jumper, 0.58MM.	3198 036	90010
9028	Wire Jumper, 0.58MM.	3198 036	90010
9029	Wire Jumper, 0.58MM.	3198 036	90010
9201	Wire Jumper, 0.58MM.	3198 036	90010
9204	Wire Jumper, 0.58MM.	3198 036	90010
9206	Wire Jumper, 0.58MM.	3198 036	90010
9207	Wire Jumper, 0.58MM.	3198 036	90010

Audio Amp Panel Parts

Audio Amp Panel Parts

0070	Clip, Transistor	3135 011	02681
0071	Insulator.	3135 010	02351
1012	Audio Amp Panel Asm.	3135 037	11411
1216	Connector, 1 Pin	2422 015	18551
1305	Connetort, 7 Pin	2422 025	09407
1316	Connector, 4 Pin	2422 025	10647
1321	Connector.	2422 025	15781
1700	Connector, 8 Pin	2422 025	12483
1701	Heatsink, Vertical, Audio.	3135 031	60151
1702	Thyristor, BT169B.	9338 268	50126
1703	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
1704	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
2701	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2702	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2703	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2704	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2705	Cap, 2u2, 20%, 50v, Electrolytic	3198 025	52280
2706	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2707	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2708	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023	22240
2709	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2710	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2711	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2712	Cap, 220n, +80/-20%, 50v, Ceramic.	2238 580	19814
2713	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2714	Cap, 33n, 10%, 50v, Ceramic.	3198 017	03330
2715	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2716	Cap, 330p, 5%, 50v, Ceramic.	3198 016	03310
2717	Cap, 100p, 5%, 50v, Ceramic.	3198 016	01010

S = Safety Part Be sure to use exact replacement part.

2718 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2719 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2720 Cap, 220n, +80/-20%, 25v, Ceramic. . . . 3198 023 22240
2721 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2722 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2723 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2724 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2725 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2726 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2727 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2728 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2729 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2730 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2731 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2732 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2733 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2734 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2735 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2736 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2737 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2739 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2740 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2741 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2742 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2743 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2744 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2745 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2763 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2776 Cap, 47u, 20%, 50v, Electrolytic 3198 025 54790
2777 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2780 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
2781 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
3701 Res, 10K, 5%, 1/6W, Carbon Film. 3198 011 01030
3702 Res, 6K8, 5%, 1/6W, Carbon Film. 3198 011 06820
3703 Res, 33K, 5%, 1/10W, Metalized Glass . . 3198 021 53330
3704 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3705 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3706 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3707 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3708 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3709 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3710 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3711 Res, 120K, 5%, 1/4W, Carbon Film 2122 101 02074
3712 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3713 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3714 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3715 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
3716 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3717 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3718 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3719 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3720 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3721 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3722 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3723 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3724 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3725 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3726 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3727 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3728 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3729 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3730 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3731 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3732 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3733 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3734 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3790 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3791 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3792 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3793 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3796 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3797 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3798 Res, 3K3, 5%, 1/6W, Carbon Film. 3198 011 03320
3799 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
4700 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4701 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5701 Inductor, Fixed, 68uH, 10% 2422 536 00504
5702 Inductor, Fixed, 68uH, 10% 2422 536 00504
5707 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5708 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5713 Coil, 1u 2422 535 95387
5714 Coil, 1u 2422 535 95387
5715 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5716 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
6701 Diode, Signal, 1N4148. . . . . 3198 010 10010
6702 Diode, Signal, 1N4148. . . . . 3198 010 10010
6703 Diode, Signal, 1N4148. . . . . 3198 010 10010
6704 Diode, Signal, BAS316. . . . . 3198 010 10630
6705 Diode, Signal, BAS316. . . . . 3198 010 10630
6706 Diode, Signal, BAS316. . . . . 3198 010 10630
6707 Diode, Signal, BAS316. . . . . 3198 010 10630
6708 Diode, Signal, BAS316. . . . . 3198 010 10630
6709 Diode, Signal, BAS316. . . . . 3198 010 10630
6710 Diode, Signal, BAS316. . . . . 3198 010 10630
6711 Diode, Signal, BAS316. . . . . 3198 010 10630
7700 IC, TDA7490. . . . . 9322 147 50667
7701 Transistor, NPN, BC847B. 3198 010 42030
7704 Transistor, NPN, BC847B. 3198 010 42030
7705 Transistor, NPN, BC847B. 3198 010 42030
7706 Transistor, PNP, BC857B. 3198 010 42150
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 Transistor, NPN, BC847B. 3198 010 42030
9012 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9027 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9034 Wire Jumper, 0.58MM. 3198 036 90010

DW PIP Panel Parts

DW PIP Panel Parts
0200 Connector, Printed Circuit 4822 267 10734
0201 Connector, B10B-EH-A 4822 267 10557
0205 Connector, 10 Pin. 2422 025 16587
0207 Connector, Printed Circuit, 4 Pin. . . . 4822 267 10565
0236 Connector, Printed Circuit 4822 267 10735
0237 Connector, Printed Circuit, 1 Pin. . . . 4822 267 10676
1184 DW PIP Panel Asm.. . . . . 3139 177 20061
1327 Crystal, 12 Mhz. 4822 242 10694
1334 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1352 Filter, SAW, 45MHZ75. . . . . 2422 549 43074
1501 Crystal, Resonator, 32Khz76. . . . . 2422 543 01069
2261 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2262 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2265 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2269 Cap, 47n, 10%, 50v, Ceramic. 4822 126 13751
2301 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2302 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2303 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2306 Cap, 10n, 10%, 50V 5322 126 11583
2309 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2311 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2312 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2313 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2314 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2316 Cap, 22n, 10%, 25V 4822 126 14494
2317 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2319 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2321 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2322 Cap, 10u, 20%, 63V 4822 124 40248
2324 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2327 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2328 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2331 Cap, 2u2, 20%, 50v, Electrolytic 4822 124 22652
2332 Cap, 220n, +/-80/20, 25v, Ceramic. . . . 4822 126 14076
2333 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2334 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2335 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2336 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2338 Cap, 2,2nF, 10%, 63V, Ceramic. 4822 122 33127
2342 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2345 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2348 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2351 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2354 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2355 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2356 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2357 Cap, 10p, 1%, 50v, Ceramic 2238 861 18109
2372 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2373 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2374 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2375 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2376 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2377 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2380 Cap, 10u, 20%, 63V 4822 124 40248
2385 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2386 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2390 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2391 Cap, 100p, 5%, 50v, Ceramic. 2020 552 94427
2392 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2393 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2401 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2402 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2403 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2404 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2405 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2411 Cap, 10u, 20%, 63V 4822 124 40248
2412 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2415 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879

S = Safety Part Be sure to use exact replacement part.

2431 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2432 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2434 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2436 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2438 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2439 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2440 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2501 Cap, 22p, 5%, 50V Ceramic. 5322 122 32658
2502 Cap, 8.2p, 0.5%, 50V 4822 126 14487
2503 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2504 Cap, 68n, 10%, 25v, Ceramic. 2020 552 96325
2505 Cap, 560p, 10%, 50v, Ceramic 4822 126 14249
2506 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2507 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2508 Cap, 6n8, 10%, 63v, Ceramic. 5322 126 11582
2509 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2511 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2811 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2812 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2813 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2814 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2816 Cap, 10u, 20%, 63V 4822 124 40248
2817 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2818 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2819 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2821 Cap, 10u, 20%, 63V 4822 124 40248
2822 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2823 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2824 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2825 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2826 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2827 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2828 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2829 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2831 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2832 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2833 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2834 Cap, 10u, 20%, 63V 4822 124 40248
2836 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2837 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2838 Cap, 220u, 20%, 6.3v, Electrolytic . . . 4822 124 11912
2839 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2841 Cap, 10u, 20%, 63V 4822 124 40248
2842 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2843 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2844 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2846 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2847 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2848 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2849 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2851 Cap, 10u, 20%, 63V 4822 124 40248
2852 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2853 Cap, 10u, 20%, 63V 4822 124 40248
2854 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2856 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2857 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2861 Cap, 10u, 20%, 63V 4822 124 40248
2862 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2863 Cap, 22u, 50v, Electrolytic Aluminum . . 4822 124 81151
2864 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2866 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2867 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2868 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2869 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2871 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2872 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2873 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2874 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2876 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2877 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2878 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2879 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2891 Cap, 1nF, 10%, 63V, Ceramic. 5322 122 31647
2892 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2893 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2894 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2895 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2896 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2897 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2898 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2899 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
3263 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 4822 117 11449
3264 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3267 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3268 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3270 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3301 Res, 1k, 5%, 1/16W 4822 051 30102
3302 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3305 Res, 2K7, 1%, 1/8W, Metalized Glass. . . 4822 117 12955
3311 Res, 27K, 5%, 1/8W, Metalized Glass. . . 4822 051 20273
3312 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3315 Res, 39K, 1%, 1/8W, Metalized Glass. . . 4822 117 12708
3316 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3318 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3321 Res, 10k, 5%, 1/16W. 4822 051 30103
3322 Res, 8K2, 1%, 1/16W. 4822 117 12902
3324 Res, 390 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20391
3326 Res, 1K, 1%, 0,125W. 5322 117 12487
3327 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3329 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3330 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3333 Res, 1k, 5%, 1/16W 4822 051 30102
3334 Res, 470R, 5%, 0,062W. 4822 051 30471
3335 Res, 120 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20121
3336 Res, 1k, 5%, 1/16W 4822 051 30102
3338 Res, 75 ohm, 1%, 1/8W, Metalized Glass . 4822 117 11927
3339 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3340 Res, 2k2, 5%, 1/16W. 4822 051 30222
3341 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3344 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3346 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3347 Res, 390 ohm, 5%, 1/16W. 4822 051 30391
3348 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3364 Res, 1k, 5%, 1/16W 4822 051 30102
3365 Res, 1K, 1%, 0,125W. 5322 117 12487
3370 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3371 Res, 15K, 1%, 1/8W, Metalized Glass. . . 4822 116 83933
3374 Res, 4k7, 5%, 1/16W. 4822 051 30472
3381 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3382 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3383 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3384 Res, 10k, 5%, 1/16W. 4822 051 30103
3385 Res, 4k7, 5%, 1/16W. 4822 051 30472
3386 Res, 10k, 5%, 1/16W. 4822 051 30103
3387 Res, 39K, 5%, 0,062W 4822 051 30393
3388 Res, 10k, 5%, 1/16W. 4822 051 30103
3389 Res, 4k7, 5%, 1/16W. 4822 051 30472
3390 Res, 470R, 5%, 0,062W. 4822 051 30471
3401 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3402 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3403 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3404 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3405 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3411 Res, 47k, 1%, 1/16W. 4822 117 12925
3412 Res, 47k, 1%, 1/16W. 4822 117 12925
3413 Res, 1k, 5%, 1/16W 4822 051 30102
3414 Res, 47k, 1%, 1/16W. 4822 117 12925
3415 Res, 47k, 1%, 1/16W. 4822 117 12925
3416 Res, 1k, 5%, 1/16W 4822 051 30102
3417 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3418 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3419 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3423 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3424 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3431 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3432 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3437 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3438 Res, 470R, 5%, 0,062W. 4822 051 30471
3439 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3451 Res, 4k7, 5%, 1/16W. 4822 051 30472
3453 Res, 4k7, 5%, 1/16W. 4822 051 30472
3456 Res, 4k7, 5%, 1/16W. 4822 051 30472
3457 Res, 4k7, 5%, 1/16W. 4822 051 30472
3458 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3460 Res, 4k7, 5%, 1/16W. 4822 051 30472
3461 Res, 4k7, 5%, 1/16W. 4822 051 30472
3462 Res, 2R2, 5%, 1/3W,. 4822 052 10228
3501 Res, 470K, 5%, 1/8W, Metalized Glass . . 4822 051 20474
3502 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3503 Res, 470R, 5%, 0,062W. 4822 051 30471
3504 Res, 6K8, 5%, 0,062W 4822 051 30682
3506 Res, 10k, 5%, 1/16W. 4822 051 30103
3507 Res, 6K8, 1%, 1/8W, Metalized Glass. . . 4822 117 11507
3508 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3509 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3510 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3801 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3802 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3803 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3804 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3805 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3806 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3807 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3808 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3809 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3810 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3811 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3812 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3813 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3814 Res, 22k, 5%, 1/16W. 4822 051 30223
3816 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3817 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3818 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3821 Res, 150 ohm, 5%, 1/16W. 4822 051 30151

S = Safety Part Be sure to use exact replacement part.

3822 Res, 4k7, 5%, 1/16W. 4822 051 30472
3823 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3824 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3825 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3826 Res, 3k3, 5%, 1/16W. 4822 051 30332
3827 Res, 1K8, 1%, 0,063W 4822 117 12903
3828 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3829 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3832 Res, 39K, 5%, 0,062W 4822 051 30393
3833 Res, 3k3, 5%, 1/16W. 4822 051 30332
3834 Res, 1K8, 1%, 0,063W 4822 117 12903
3836 Res, 3k3, 5%, 1/16W. 4822 051 30332
3837 Res, 1K8, 1%, 0,063W 4822 117 12903
3838 Res, 39K, 5%, 0,062W 4822 051 30393
3839 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3846 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3854 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3856 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3857 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3858 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3862 Res, 1R, 5%, 0,33W 4822 052 10108
3863 Res, 1R, 5%, 0,33W 4822 052 10108
3865 Res, 3k3, 5%, 1/16W. 4822 051 30332
3866 Res, 1k, 5%, 1/16W 4822 051 30102
3868 Res, 1K8, 1%, 0,063W 4822 117 12903
3869 Res, 3k3, 5%, 1/16W. 4822 051 30332
3871 Res, 2k2, 5%, 1/16W. 4822 051 30222
3872 Res, 470R, 5%, 0,062W. 4822 051 30471
3873 Res, 1k5, 5%, 1/16W. 4822 051 30152
3874 Res, 1k5, 5%, 1/16W. 4822 051 30152
3876 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3878 Res, 1k, 5%, 1/16W 4822 051 30102
3879 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3881 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3884 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3886 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3887 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3888 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3889 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3890 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3891 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3892 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3893 Res, 1k5, 5%, 1/16W. 4822 051 30152
3894 Res, 2k2, 5%, 1/16W. 4822 051 30222
3895 Res, 470R, 5%, 0,062W. 4822 051 30471
3896 Res, 1k5, 5%, 1/16W. 4822 051 30152
3897 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3898 Res, 1k, 5%, 1/16W 4822 051 30102
4301 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4306 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4309 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4310 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4311 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4312 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4313 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4315 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4434 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4437 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4438 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4827 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4828 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
5261 Coil, Fixed, 5U6, 10%. 4822 157 11778
5309 Coil, 680n 4822 157 71334
5332 Coil, 680n 4822 157 71334
5333 Coil, 680n 4822 157 71334
5334 Coil, 680n 4822 157 71334
5349 Coil, 820n 4822 157 71694
5350 Coil, 15u. 3198 018 61590
5351 Coil, 15u. 3198 018 61590
5401 Coil, 4u7. . . . . 2422 535 94637
5501 Coil, 680n 4822 157 71334
5816 Filter, L/C, BLM21A121SPT 4822 157 11506
5818 Filter, L/C, BLM21A121SPT 4822 157 11506
5827 Filter, L/C, BLM21A121SPT 4822 157 11506
5834 Filter, L/C, BLM21A121SPT 4822 157 11506
5839 Filter, L/C, BLM21A121SPT 4822 157 11506
5848 Filter, L/C, BLM21A121SPT 4822 157 11506
5849 Filter, L/C, BLM21A121SPT 4822 157 11506
5851 Filter, L/C, BLM21A121SPT 4822 157 11506
5853 Filter, L/C, BLM21A121SPT 4822 157 11506
6412 Diode, BAS316. . . . . 4822 130 11397
6415 Diode, BAS316. . . . . 4822 130 11397
6801 Diode, Reference, UZ3.9B 4822 130 11564
6802 Diode, Reference, UZ3.9B 4822 130 11564
6803 Diode, BAS316. . . . . 4822 130 11397
7201 Tuner, V+U PLL 2422 542 90115
7301 IC, TDA8887H/N1. . . . . 9352 638 72557
7305 Transistor, NPN, BC847BW 3198 010 42310
7307 Transistor, NPN, BC847BW 3198 010 42310
7331 Transistor, NPN, BC857BW 3198 010 42320
7337 Transistor, NPN, BC847BW 3198 010 42310
7368 Transistor, NPN, BC847BW 3198 010 42310
7385 Transistor, NPN, BC847BW 3198 010 42310
7386 Transistor, NPN, BC847BW 3198 010 42310
7401 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7402 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7403 IC, Digital, MOS, M62320FP 4822 209 17345
7411 Transistor, NPN, BC847BW 3198 010 42310
7412 Transistor, NPN, BC847BW 3198 010 42310
7421 Transistor, NPN, BC857BW 3198 010 42320
7422 Transistor, NPN, BC857BW 3198 010 42320
7434 Transistor, BC369. . . . . 5322 130 44593
7438 Transistor, NPN, BC847BW 3198 010 42310
7501 IC, Digital, MOS, Z86130-12SSC 9322 147 01668
7801 IC, Digital, MOS DRAM, SAB9083H/N4 . . . 9352 639 83557
7802 IC, Analog Voltage/Current Regulator, LD1 117V33 . . . . . 9322 123 54687
7803 IC, TDA8601T/C1. . . . . 4822 209 12776
7804 IC, Digital, MOS, Standard Logic, 74HC1G32GW. 9352 457 50115
7805 Transistor, NPN, BC847BW 3198 010 42310
7806 Transistor, NPN, BC847BW 3198 010 42310
7807 Transistor, NPN, BC847BW 3198 010 42310
7808 Transistor, NPN, BC847BW 3198 010 42310
7809 Transistor, NPN, BC847BW 3198 010 42310
7810 Transistor, NPN, BC847BW 3198 010 42310
7824 Transistor, NPN, BC847BW 3198 010 42310
7828 Transistor, NPN, BC847BW 3198 010 42310
7832 Transistor, NPN, BC847BW 3198 010 42310
7871 Transistor, NPN, BC847BW 3198 010 42310
7874 Transistor, NPN, BC847BW 3198 010 42310
7876 Transistor, NPN, BC857BW 3198 010 42320
7891 Transistor, NPN, BC847BW 3198 010 42310
7892 Transistor, NPN, BC847BW 3198 010 42310
7893 Transistor, NPN, BC847BW 3198 010 42310
7894 Transistor, NPN, BC857BW 3198 010 42320
7895 Transistor, NPN, BC847BW 3198 010 42310

SSB Panel Parts

SSB Panel Parts
1001 Crystal Resonator, 6MHz, 20p 2422 543 89022
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1102 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1103 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1104 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1105 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1185 SSB Panel Assembly 3135 037 12471
1303 Connector, 5 Pin, M. 2422 025 16966
1304 Connector, 7 Pin, M. 2422 025 17104
1308 Crystal Resonator, 3.579545MHz., 16P, HC49/U A. 2422 543 01183
1401 Connector, V, 10 Pin,, F 2422 025 16729
S 1403 Fuse, 500mA, F, 50V. 2422 086 11092
1406 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1410 Filter, S.A.W. 45Mhz75 . . . . . 2422 549 44377
1411 Filter, Ceramic, 4.5Mhz. 2422 549 44534
1651 Crystal Resonator, 18.432MHz, 12P. . . . 2422 543 89019
1680 Connector, V, 6 Pin, M 2422 025 16961
1681 Connector, 3 Pin, V, M 2422 025 17103
1682 Connector, V, 10 Pin,, F 2422 025 16729
1683 Connector, V, 5 Pin, F 2422 025 16793
1702 Ceramic Resonator, 12MHz,, CSTCV 2422 540 98456
2001 Cap, 33p, 5%, 50V, Ceramic 3198 016 33390
2002 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2003 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2004 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2005 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2006 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2007 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2008 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2010 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2011 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2012 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2013 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2016 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2017 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2019 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2020 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2022 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2023 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2024 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2025 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2033 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2034 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2035 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2036 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290

S = Safety Part Be sure to use exact replacement part.

2037 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2038 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2039 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2040 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2052 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2053 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2054 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2055 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2056 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2057 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2100 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2108 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2109 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2110 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2111 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2112 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 10n, 10%, 50V, Ceramic. 3198 017 01030
2312 Cap, 33n, 5%, 50V, Ceramic 2020 552 96659
2312 Cap, 33n, 5%, 16v, Ceramic 2222 781 11569
2340 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2342 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2351 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2356 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 3n3, 10%, 50V, Ceramic. 3198 017 33320
2361 Cap, 1p2, 21%, 50V, Ceramic. 3198 016 31280
2362 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2372 Cap, 1u, +80/-20%, 16V, Ceramic. 3198 017 21050
2373 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2374 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2375 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2376 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2377 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2378 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2384 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2388 Cap, 33n, 10%, 16V, Ceramic. 3198 017 33330
2389 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2390 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2391 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2394 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2395 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2396 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2397 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2399 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2401 Cap, 10n, 10%, 50V, Ceramic. 3198 017 31030
2404 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2405 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2413 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2418 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2420 Cap, 150p, 5%, 50V, Ceramic. 3198 016 31510
2422 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2425 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2501 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2502 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2503 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2504 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2505 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2506 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2507 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2508 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2510 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2511 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2512 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2513 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2515 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2520 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2521 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2522 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2523 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2524 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2525 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2526 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2528 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2529 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2530 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2549 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2550 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2552 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2553 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2554 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2555 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2562 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2563 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2564 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2565 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2566 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2567 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2568 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2569 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2570 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2571 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2574 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2575 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2576 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2577 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2578 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2579 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2582 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2583 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2584 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2585 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2586 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2590 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2592 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2593 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2594 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2595 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2609 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2610 Cap, 2n2, 10%, 50V, Ceramic. 3198 017 32220
2611 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2632 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2634 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2640 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2643 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2644 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2645 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2646 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2649 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2651 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2652 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2653 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2654 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2659 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2660 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2661 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2662 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2663 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2664 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2665 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2666 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2667 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2668 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2670 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2673 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2674 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2677 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2678 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2679 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2680 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2681 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2682 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2686 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2687 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2690 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2691 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2693 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2694 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2695 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2697 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2698 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2709 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2710 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2711 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2712 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2713 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2714 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2716 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2718 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2719 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2720 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2721 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2722 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2728 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2729 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2730 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2731 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2740 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2741 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2742 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2743 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2744 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2745 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2746 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2747 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2748 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2749 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2750 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2751 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2763 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2765 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2766 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2767 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2768 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2771 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2772 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2774 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2776 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2777 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2778 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2779 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2780 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2781 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2782 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2784 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2785 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2786 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2787 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2788 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2789 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2790 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2791 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2792 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2793 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2794 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2795 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2796 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2797 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2798 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2799 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2800 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2801 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2802 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2803 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2805 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2807 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2809 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2810 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2811 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2812 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2813 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2817 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2819 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2820 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2821 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2826 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2829 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2831 Cap, 68p, 5%, 50V, Ceramic 3198 016 36890
2832 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2833 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2835 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2836 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2838 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2843 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2845 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2846 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2847 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2848 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2851 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2859 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2861 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2864 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2865 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2866 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2867 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2870 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2871 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2872 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2874 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2875 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2876 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2880 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2881 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2884 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2899 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2908 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2909 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2910 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2911 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2912 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
3001 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3002 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3003 Res, 24K, 1%, 1/16W, Metalized Glass . . 2322 704 62403
3006 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3007 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3008 Res, Network, 4x220 ohm, 5%. 3198 031 12210
3009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3011 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3012 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3013 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3014 Res, 6K8, 5%, 1/16W, Metalized Glass . . 3198 021 36820
3015 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3016 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3017 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3018 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3019 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3020 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3021 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3024 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3025 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3026 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3027 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3029 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3031 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3033 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3034 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3035 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3039 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3040 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3041 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3042 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3044 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3045 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3046 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3048 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3049 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3050 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3051 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3052 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3053 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3054 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3055 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3056 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3057 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2120 108 93902
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2322 704 66201
3061 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3062 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3064 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3065 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3066 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3067 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3068 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3069 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3074 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3076 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3078 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3079 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3080 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3081 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3088 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720

3090 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3093 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3094 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3095 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3096 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3097 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3098 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3099 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3169 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3170 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3171 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3172 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3173 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3174 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3176 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3180 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3181 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3182 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3183 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3184 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3185 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3186 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3187 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3188 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3189 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3304 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3308 Res, 470K, 5%, 1/10W, Metalized Glass. . 3198 021 54740
3324 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3329 Res, 6R8, 5%, 1/8W, Metalized Glass. . . 2322 750 66808
3330 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3332 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3335 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3355 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3360 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3370 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3371 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3372 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3376 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3377 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3378 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3382 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3385 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3387 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3393 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3395 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3396 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3397 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3398 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3400 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3401 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3402 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3403 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3404 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3405 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3408 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3415 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3418 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3419 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3420 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3436 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3437 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3439 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3441 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3444 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3446 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3447 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3448 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3449 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3456 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3457 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3463 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3467 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3470 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3471 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3473 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3500 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3501 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3504 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3505 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3506 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3509 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3510 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3511 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3512 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3513 Res, 270K, 5%, 1/16W, Metalized Glass. . 2322 702 60274
3514 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3515 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3516 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3519 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3521 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3522 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3523 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3524 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3525 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3526 Res, 1M, 5%, 1/16W, Metalized Glass. . . 3198 021 31050
3527 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3529 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3530 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3531 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3532 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3533 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3540 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3546 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3554 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3558 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3559 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3560 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3561 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3562 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3563 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3564 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3567 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3570 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3571 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3572 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3573 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3574 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3575 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3576 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3577 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3578 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3579 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3614 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3615 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3624 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3626 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3627 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3628 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3630 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3634 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3636 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3637 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3639 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3640 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3641 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3642 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3643 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3644 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3653 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3654 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3658 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3666 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3667 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3668 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3669 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3670 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3671 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3693 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3698 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3699 Res, 180K, 5%, 1/16W, Metalized Glass. . 2322 702 60184
3709 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3710 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3711 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3712 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3713 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3714 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3715 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3716 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3717 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3718 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3719 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3720 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3725 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3726 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3727 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3728 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3730 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3736 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3737 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3738 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3739 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3740 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3741 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3742 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3744 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220

S = Safety Part Be sure to use exact replacement part.

3745 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3746 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3747 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3748 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3749 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3750 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3751 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3752 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3753 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3754 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3755 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3756 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3757 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3758 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3759 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3762 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3763 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3764 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3771 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3772 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3773 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3774 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3781 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3782 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3783 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3792 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3793 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3794 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3795 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3804 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
5150 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5151 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5152 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5153 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5154 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5155 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5305 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5306 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5307 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5308 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5309 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5310 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5311 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5402 Coil, 8u2. . . . . 3198 018 38280
5404 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5405 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5406 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5408 IND VAR SM 5CCB 91MHZ PM R 2422 549 44875
5409 IND FXD 0603 EMI 100MHZ 120R R 2422 549 42893
5409 Inductor, Fixed, 100MHz, 120R 2422 549 42896
5411 Coil, 330n 3198 018 33370
5415 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5416 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5417 Coil, 33u. 3198 018 33390
5651 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5652 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5653 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5654 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5655 Coil, 22u. 3198 018 32290
5656 Coil, 6u8. . . . . 3198 018 36880
5657 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5658 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5659 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5660 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5661 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5662 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5663 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5664 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5665 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5666 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5667 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5668 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5669 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5670 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5671 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5672 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5706 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5707 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5710 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5711 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5712 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5713 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5714 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5716 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5717 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5718 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5719 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5721 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5722 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5724 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5726 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5727 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5728 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5729 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5731 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5736 Coil, 6u8. . . . . 3198 018 36880
5737 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5738 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5742 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5743 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5744 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5900 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5901 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5902 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5903 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5904 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5910 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5911 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5912 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5913 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5914 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5915 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5917 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5918 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5919 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5920 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
6001 Diode, Signal, BAT54 . . . . . 3198 010 10660
6002 Diode, Signal, BAS316. . . . . 3198 010 10630
6003 Diode, Signal, BAT54 . . . . . 3198 010 10660
6004 Diode, Signal, BAT54 . . . . . 3198 010 10660
6005 Diode, Regulator, PLVA2650A. 9340 309 70215
6320 Diode, Signal, BAS316. . . . . 3198 010 10630
6321 Diode, Signal, BAS316. . . . . 3198 010 10630
6322 Diode, Signal, BAS316. . . . . 3198 010 10630
6652 Zener Diode, 10V 3198 020 51090
6657 Zener Diode, 2.7 volt. 9340 548 43115
6658 Diode, Signal, BAS316. . . . . 3198 010 10630
6926 Zener Diode, 8.2V. 3198 020 58280
6956 Zener Diode, 8.2V. 3198 020 58280
6957 Zener Diode, 8.2V. 3198 020 58280
7001 IC, TV System Controller, QFP120, SAA5801 H/015. . . . . 9352 684 81557
7002 Transistor, NPN, BC857BW 3198 010 42320
7003 Transistor, NPN, BC847BW 3198 010 42310
7004 Transistor, NPN, BC847BW 3198 010 42310
7005 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7006 IC, CMOS Flash Memory, TC58FVM5T2ATG65 . 9322 194 83671
7007 IC, CMOS 16 Bit Dynamic RAM, MSM51V18165F 9322 157 20668
7007 IC, CMOS 16-Bit Dynamic RAM, IS41LV16100 9322 200 55668
7008 Transistor, NPN, BC847BW 3198 010 42310
7009 Transistor, NPN, BC847BW 3198 010 42310
7010 Transistor, NPN, BC857BW 3198 010 42320
7011 IC, M24C32-WMN6. . . . . 9322 124 74668
7013 Transistor, NPN, BC847BW 3198 010 42310
7014 Transistor, NPN, BC857BW 3198 010 42320
7015 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7016 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7100 IC, 3.3V Prog. LVDS Transmitter, DS90C385 9322 159 45668
7305 Transistor, NPN, BC847BW 3198 010 42310
7312 Transistor, NPN, PDTC144EU 3198 010 44330
7320 Transistor, NPN, BC847BW 3198 010 42310
7322 Transistor, NPN, BC847BW 3198 010 42310
7323 IC, IIC-Bus Controlled TV Processor. . . 9352 625 24518
7375 Transistor, NPN, BC847BW 3198 010 42310
7402 Transistor, NPN, BC847BW 3198 010 42310
7404 Transistor, NPN, BC847BW 3198 010 42310
7408 Transistor, PNP, BC857B. 3198 010 42150
7409 Transistor, PNP, BC857B. 3198 010 42150
7410 Transistor, NPN, BC847BW 3198 010 42310
7411 Transistor, NPN, BC847B. 3198 010 42030
7651 IC, Multi-standard Sound Processor, MSP34 21G. 9322 183 23671
7654 Transistor, NPN, BC847BS 9340 425 20115
7664 Transistor, NPN, BC847BPN. 9340 425 30115
7665 Transistor, NPN, BC847BPN. 9340 425 30115
7666 Transistor, NPN, BC847BPN. 9340 425 30115
7668 Transistor, NPN, BC857BW 3198 010 42320
7674 Transistor, NPN, BC847BW 3198 010 42310
7675 Transistor, NPN, BC847BS 9340 425 20115
7678 Transistor, NPN, BC847BS 9340 425 20115
7679 Transistor, NPN, BC847BS 9340 425 20115
7681 IC, LP/LN Operational Amplifier. 9322 060 73668
7682 Transistor, NPN, BC847B. 3198 010 42030
7706 IC, Digital, LF25CDT 9322 142 88668
7706 IC, Voltage Regulator w/Inhibit. 9322 164 71668
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7709 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 IC Socket, 32 Pin, V, F. 2422 486 80938
7711 IC, 512 Kbit EPOM, M27C512 . . . . . 9322 127 85668
7712 IC, Octal D-type Transparent Latch . . . 9351 870 00118

S = Safety Part Be sure to use exact replacement part.

7713 IC, PICNIC, SAA4978H 9352 688 09557
7714 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7715 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7717 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7718 IC, Field/Line Rate Converter, SAA4993H. 9352 695 58557
7719 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7722 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7723 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7724 IC, EAGLE - Video Enhancment Processor, T 8F24EF 9322 188 08702
7725 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7726 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7727 IC, Low Drop Volt. Reg. w/Inhibit, LF15AB DT. 9322 170 14668
7734 IC, Inverter, LVLP, 74LVC1G04. . . . . 3198 010 70390
7735 IC, D-type flip-flop, 74LVC1G79. . . . . 9352 686 75125
9008 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9010 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9011 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9012 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9013 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9014 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9302 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9313 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9322 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9401 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9403 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9406 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9407 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9410 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9413 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9414 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9416 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9417 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9520 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9522 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9603 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9604 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9610 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9611 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9632 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9642 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9645 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9676 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9677 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9682 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9683 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9686 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9687 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9691 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9702 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9703 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9704 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9712 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9714 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9716 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9717 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9718 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9719 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9721 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9723 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9725 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9729 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9731 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9733 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9735 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9739 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9740 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9741 Res, Network, 4x10 ohm, 5% 3198 031 11090
9744 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9754 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9760 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9761 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9763 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9764 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9768 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9769 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9901 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9902 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9903 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9904 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9905 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9906 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9907 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9908 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9909 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9919 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9920 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9921 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9925 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9927 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9928 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9929 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9935 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9937 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9938 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9939 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9944 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9945 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9946 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9947 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9948 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9949 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9950 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9951 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9952 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9953 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9954 Res, Zero ohm, 'Chip' Jumper 3198 021 90030

Scaler Board MSB Panel

Scaler Board MSB Panel
0300 Connector, 64 Pin, BM, M 2422 025 17714
0303 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0305 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0308 Phono Jack Board, 4 Plugs, Red & White . 2422 026 05422
0310 Sub-D Connector, 15 Pin, BM, F 2422 025 17027
0311 Phono Jack Board, 6 Plugs, Red , Blue, Green 2422 026 05421
0315 Connector, 5 Pin, M, IDE 2422 025 17931
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Connector, 4 Pin 2422 025 12479
1105 Connector, 10 Pin, V, M. 2422 021 98888
1106 Connector, 10 Pin, V, M. 2422 021 98888
1152 Scaler Board MSB Panel Assembly. 3122 357 22272
1300 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1301 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1302 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1303 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1401 Connector, V, 10 Pin,, F 2422 025 16729
1501 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1502 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1503 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1504 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1505 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1700 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1701 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1702 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1703 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2108 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2109 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2110 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2111 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2121 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2122 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2138 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2139 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2151 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2152 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2153 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2154 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2155 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2156 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2157 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2158 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2159 Cap, 4p7, 5%, 50V, Ceramic 3198 016 34780
2160 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2161 Cap, 100u, 20%, 6.3V, Electrolytic . . . 2020 012 93793
2170 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2171 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2172 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2173 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2174 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2175 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2176 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2177 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2178 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2179 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2180 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2181 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2182 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2183 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2184 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2185 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2186 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2187 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2188 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2189 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2190 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2191 Cap, 68n, 10%, 16V, Ceramic. 3198 017 36830
2192 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2194 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2195 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2196 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2197 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2198 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2199 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2200 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2225 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2226 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2227 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2228 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2229 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2230 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2231 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2232 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2233 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2234 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2235 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2236 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2237 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2238 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2240 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2241 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2242 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2243 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2244 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2245 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2246 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2247 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2248 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2249 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2255 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2260 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2261 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2262 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2263 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2267 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2295 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2296 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2297 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2298 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2299 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2300 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2304 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2305 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2306 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2307 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2308 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2309 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2311 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2312 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2314 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2315 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2316 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2317 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2318 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2319 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2320 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2321 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2322 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2323 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2345 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2346 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2347 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2348 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2349 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2354 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2355 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2359 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2360 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2361 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2362 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2363 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2364 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2372 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2373 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2374 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2375 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2377 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2378 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2379 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2380 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2381 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2382 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2383 Cap, 3n9, 10%, 50V, Ceramic. 2020 552 96428
2384 Cap, 39n, 10%, 50V, Ceramic. 2238 580 15644
2385 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2386 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2405 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2406 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2408 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2409 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2413 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2414 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2415 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2416 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2417 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2418 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2419 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2420 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2421 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2423 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2431 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2432 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2433 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2434 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2435 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2437 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2438 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2439 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2440 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2441 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2443 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2444 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2445 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2446 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2447 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2448 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2492 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2493 Cap, 1u, +80/-20%, 10V, Ceramic. 3198 017 41050
2494 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2495 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2497 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2502 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2535 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2536 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2538 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2539 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2540 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2541 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2542 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2543 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2550 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2582 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2583 Cap, 270p, 5%, 50V, Ceramic. 3198 016 32710
2584 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2585 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2586 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2587 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2588 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2590 Cap, 470p, 2%, 50V, Ceramic. 2238 867 14471
2593 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2594 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2595 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2596 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2598 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2599 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2600 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2633 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290

S = Safety Part Be sure to use exact replacement part.

2634 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2635 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2659 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2660 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2664 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2665 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2666 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2667 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2669 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2670 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2671 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2672 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2710 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2712 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2713 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2714 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2715 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2716 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2718 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2720 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2722 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2724 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2725 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2726 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2727 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2730 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2736 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2737 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2759 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2766 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2767 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2771 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2772 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2780 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2781 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2790 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2820 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2821 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 1n5, 10%, 50V, Ceramic. 3198 017 31520
2826 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2827 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2830 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2831 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2832 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2833 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2850 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2851 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2852 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2855 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2856 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2861 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2862 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2863 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2870 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2871 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2882 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2883 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2886 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2888 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2897 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
3106 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3107 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3108 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3109 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3110 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3111 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3112 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3113 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3114 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3115 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3116 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3120 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3121 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3122 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3123 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3124 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3134 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3135 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3137 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3138 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3139 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3151 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3152 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3153 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3156 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3157 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3158 Res, 75 ohm, 5%, 1/16W, Metalized Glass. 3198 021 37590
3173 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3175 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3176 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3180 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3181 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3182 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3183 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3184 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3185 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3186 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3187 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3188 Res, 68 ohm, 5%, 1/16W, Metalized Glass. 3198 021 36890
3198 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3220 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3221 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3260 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3261 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3262 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3263 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3264 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3265 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3266 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3302 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3303 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3304 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3306 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3345 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3346 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3347 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3348 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3349 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3350 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3351 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3352 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3405 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3406 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3407 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3408 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3409 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3410 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3411 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3413 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3414 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3415 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3416 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3420 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3422 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3423 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3425 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3426 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3427 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3428 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3434 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3435 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3436 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3437 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3438 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3440 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3441 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3444 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3445 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3447 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3448 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3449 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3450 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3451 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3452 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3455 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3456 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3484 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040

S = Safety Part Be sure to use exact replacement part.

3485 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3486 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3487 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3488 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3489 Res, 4R7, 5%, 1/16W, Metalized Glass . . 3198 021 34780
3490 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3492 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3497 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3498 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3499 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3500 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3505 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3506 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3507 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3508 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3511 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3512 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3535 Res, Network, 4x47 ohm, 5% 3198 031 14790
3536 Res, Network, 4x47 ohm, 5% 3198 031 14790
3537 Res, Network, 4x47 ohm, 5% 3198 031 14790
3538 Res, Network, 4x47 ohm, 5% 3198 031 14790
3539 Res, Network, 4x47 ohm, 5% 3198 031 14790
3540 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3541 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3542 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3543 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3544 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3581 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3582 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3583 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3584 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3585 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3586 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3587 Res, 47K, 1%, 1/16W, Metalized Glass . . 2322 704 64703
3588 Res, 330K, 5%, 1/16W, Metalized Glass. . 3198 021 33340
3589 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3590 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3591 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3593 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3595 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3597 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3598 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3599 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3603 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3604 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3605 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3606 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3630 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3631 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3633 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3634 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3635 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3636 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3649 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3651 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3653 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3654 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3666 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3667 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3668 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3669 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3670 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3673 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3674 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3675 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3676 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3677 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3710 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3711 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3713 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3714 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3715 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3716 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3717 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3718 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3720 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3721 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3722 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3725 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3726 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3727 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3730 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3731 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3732 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3733 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3745 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3746 Res, Network, 4x47 ohm, 5% 3198 031 14790
3747 Res, Network, 4x47 ohm, 5% 3198 031 14790
3748 Res, Network, 4x47 ohm, 5% 3198 031 14790
3749 Res, Network, 4x47 ohm, 5% 3198 031 14790
3750 Res, Network, 4x47 ohm, 5% 3198 031 14790
3751 Res, Network, 4x47 ohm, 5% 3198 031 14790
3752 Res, Network, 4x47 ohm, 5% 3198 031 14790
3753 Res, Network, 4x47 ohm, 5% 3198 031 14790
3754 Res, Network, 4x47 ohm, 5% 3198 031 14790
3755 Res, Network, 4x47 ohm, 5% 3198 031 14790
3756 Res, Network, 4x47 ohm, 5% 3198 031 14790
3757 Res, Network, 4x47 ohm, 5% 3198 031 14790
3758 Res, Network, 4x47 ohm, 5% 3198 031 14790
3760 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3761 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3767 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3768 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3769 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3770 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3777 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3779 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3781 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3782 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3790 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3792 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3797 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3798 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3799 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3801 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3820 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3821 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3826 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3828 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3829 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3830 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3831 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3832 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3850 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3851 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3856 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3858 Res, 1K5, 1%, 1/16W, Metalized Glass . . 2322 704 61502
3860 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3861 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3862 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3870 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3871 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3872 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3873 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3999 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
4105 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4106 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4110 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4111 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4267 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4349 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4485 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4650 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4778 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4780 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4793 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4890 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
4891 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4892 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5107 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5160 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5164 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5165 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5166 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5170 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5195 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5225 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5240 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5255 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5260 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5295 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5296 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5297 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5345 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5346 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5347 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5348 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5405 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5406 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5408 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5411 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5486 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5488 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5535 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5536 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5539 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5581 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769

S = Safety Part Be sure to use exact replacement part.

5582 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5583 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5584 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5585 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5633 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5710 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5711 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5712 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5715 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5724 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5746 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5747 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5749 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5751 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5780 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5830 Coil, 22u. 2422 535 95278
5860 Coil, 22u. 2422 535 95278
5890 Coil, 22u. 2422 535 95278
5892 Coil, 22u. 2422 535 95278
6220 Diode, Signal, BAV99 . . . . . 3198 010 10620
6221 Diode, Signal, BAV99 . . . . . 3198 010 10620
6405 Diode, Signal, BAT54 . . . . . 3198 010 10660
6485 Diode, Signal, BAT54 . . . . . 3198 010 10660
6581 Diode, Signal, BAS316. . . . . 3198 010 10630
6630 Zener Diode, 6.8V. 3198 020 56880
6631 Zener Diode, 6.8V. 3198 020 56880
6632 Zener Diode, 6.8V. 3198 020 56880
6633 Zener Diode, 33V 3198 020 53390
6634 Zener Diode, 33V 3198 020 53390
6635 Zener Diode, 33V 3198 020 53390
6636 Zener Diode, 33V 3198 020 53390
6637 Zener Diode, 6.8V. 3198 020 56880
6638 Zener Diode, 6.8V. 3198 020 56880
6639 Zener Diode, 6.8V. 3198 020 56880
6640 Zener Diode, 6.8V. 3198 020 56880
6641 Zener Diode, 6.8V. 3198 020 56880
6642 Zener Diode, 6.8V. 3198 020 56880
6643 Zener Diode, 6.8V. 3198 020 56880
6710 Zener Diode, 6.8V. 3198 020 56880
6711 Zener Diode, 6.8V. 3198 020 56880
6712 Zener Diode, 6.8V. 3198 020 56880
6745 Diode, Signal, BAV99 . . . . . 3198 010 10620
6746 Diode, Signal, BAV99 . . . . . 3198 010 10620
6747 Diode, Signal, BAV99 . . . . . 3198 010 10620
6748 Diode, Signal, BAV99 . . . . . 3198 010 10620
6749 Diode, Signal, BAV99 . . . . . 3198 010 10620
6750 Diode, Signal, BAV99 . . . . . 3198 010 10620
6751 Zener Diode, 6.8V. 3198 020 56880
6752 Zener Diode, 6.8V. 3198 020 56880
6753 Diode, Signal, BAV99 . . . . . 3198 010 10620
6754 Diode, Signal, BAV99 . . . . . 3198 010 10620
6755 Diode, Signal, BAS316. . . . . 3198 010 10630
6756 Diode, Signal, BAS316. . . . . 3198 010 10630
6757 Zener Diode, 33V 3198 020 53390
6758 Zener Diode, 33V 3198 020 53390
6759 Zener Diode, 33V 3198 020 53390
6760 Zener Diode, 33V 3198 020 53390
6761 Zener Diode, 6.8V. 3198 020 56880
6820 Diode, Signal, BAS316. . . . . 3198 010 10630
6830 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
6850 Diode, Signal, BAS316. . . . . 3198 010 10630
6860 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
7107 IC, 2 Ch. IIC Multiplexer, PCA9540 . . . 9352 666 74118
7120 IC, Prog. Gate Array, EP1C6Q240C8. . . . 9322 196 44671
7137 IC, Volt Det. w/Prog. Delay, NCP303LS09. 9322 186 29685
7160 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7170 IC, 140 MSPS Analog Interface, AD9883A . 9322 181 72671
7195 IC, 100 MSPS, 3V A/D Converter, AD9283 . 9322 197 13668
7255 IC, Serial Conf. Flash Memory, 1Mbit, EPC S1. . . . . 9322 196 51682
7260 IC, Serial Conf. f/APEX & FLEX Dev., EPC2 9322 141 53682
7295 IC, Digital Transmitter, SII160CT100 . . 9322 171 04671
7345 IC, 205 MSPS Analog FP Interface, AD9888 9322 179 30671
7346 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7347 IC, Quad Buffer/Driver, 74LVC125AD . . . 9352 317 00118
7405 IC, M24C32-WMN6. . . . . 9322 124 74668
7406 IC, 64k x 16-bit Static RAM, CY62126BV . 9322 164 75682
7407 IC, PW181 Image Processor, PW181-10Q . . 9322 184 01671
7409 IC, 16Mbit, 3V Flash Memory, M29W160ET . 9322 194 74668
7411 Crystal Oscillator, 14.31818MHz, FXO-34FL 2722 171 08787
7484 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7486 Transistor, NPN, BC847BW 3198 010 42310
7487 Transistor, NPN, BC847BW 3198 010 42310
7490 Transistor, NPN, BC847BW 3198 010 42310
7491 Transistor, NPN, BC847BW 3198 010 42310
7494 IC, Prog. Shunt Volt. Ref., TS431. . . . 9322 192 16685
7537 IC, LVDS Receiver to 24bit Conv., DS90CF386. . . . . 9322 164 41668
7581 IC, Dual Retrig. Mono Multivibrator, 74HC T4538. . . . . 9337 153 90118
7582 Transistor, NPN, BC847BW 3198 010 42310
7583 IC, Video Sync Separator, LM188. . . . . 9322 005 78668
7589 IC, Triple 2 Ch. Analog Multiplex/Demulti plexer 9337 153 20118
7592 IC, Ultra Fast Comparator, TL3016. . . . 9322 125 63668
7593 IC, Hex Inverting Schmitt-trigger, 74LVC1 4A. 9352 607 39118
7594 Transistor, NPN, BC847BW 3198 010 42310
7633 IC, Serial EEPROM. 9322 046 99668
7710 IC, Wide Band Analog Switch, M52758FP. . 9322 185 90668
7715 Transistor, NPN, BC847BW 3198 010 42310
7716 Transistor, NPN, BC847BW 3198 010 42310
7717 Transistor, NPN, BC847BW 3198 010 42310
7725 Transistor, NPN, BC847BW 3198 010 42310
7746 IC, HDCP PanelLink Receiver, SII169CT100 9322 185 79668
7747 IC, Serial EEPROM. 9322 046 99668
7749 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7750 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7820 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7830 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7850 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7860 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7870 IC, Adj. Pos. Volt. Reg., LD1117DT . . . 9322 144 97668

Cabinet & Accessory Parts

0005 System Cooling Fan Assembly. 3135 037 71361
0006 Housing, Control 3135 037 74381
0009 Cable, Thermal Sw. 2 Pin, 600mm. 3135 038 70071
0010 Roller Switch, f/Light Engine Lamp Door. 3135 038 40011
0016 Lamp, Light Engine 3122 438 71310
0017 Light Engine Asm. 1.18", D56, XION 1.05. 3122 437 11481
0018 Bracket, Light Engine. 3135 034 01923
0019 Screen, Lenticular, 55W LCoS 3135 033 20311
0020 Screen, Fresnel, 55W LCoS. 3135 033 20301
0021 Mirror, 55W LCoS 3135 034 90124
0023 Shield, Light. 3135 034 04241
0024 Stud, Adjusting, f/Light Engine (3 used) 3135 030 40281
0025 Bracket, Adjust. 3135 031 10021
0030 Cabinet Front Asm., LCoS 55W 3135 037 54171
0032 Cabinet Top, 55W 3135 037 54181
0034 Upper Backcover, 55W 3135 037 54191
0036 Lower Backcover, 55W 3135 037 54201
0038 Cabinet Base, 55W. 3135 034 04291
0039 Baffle, Speaker, 55W Asm.. . . . . 3135 037 54981
0065 Philips Wordmark 3135 030 00491
0067 Label, Rear Jack Panel 3135 037 54291
0071 Label, Rear Center Channel Sw. 3135 030 00361
0075 Vertical Rail, Left Side, LCoS 55W . . . 3135 031 20374
0076 Vertical Rail, Right Side, LCoS 55W. . . 3135 031 20384
0077 Rail, Screen, Horizontal, LCoS 55W . . . 3135 031 20364
0078 Support Bracket, Mirror Top (2 used) . . 3135 034 01501
0079 Support Bracket, Mirror Right. 3135 034 01511
0080 Support Bracket, Mirror Left 3135 034 01521
0090 Bracket Left, Cabinet Support. 3135 031 20274
0091 Bracket Right, Cabinet Support 3135 031 20264
0092 Rail Support Bracket 3135 031 20491
0093 Support, Back. 3135 034 01421
0096 Door, Lamp Access. 3135 034 04271
0098 Filter Assembly. 3135 037 51811
0106 Rail, System Asm. Left 3135 031 20332
0107 Rail, System Asm. Right. 3135 031 20342
0127 Frame, f/Side Jack Panel 3135 037 54211
0132 Frame, f/LED Sensor Panel. 3135 034 01872
0144 Cup, Mountiing (2 used). 3135 030 40151
0145 Cup, Mountiing (2 used). 3135 030 40151
0167 Documentation, Quick Use Guide, English. 3135 035 22893
0168 Documentation, Owner's Manual, English . 3135 035 22883
0193 Option Code Lable, LCoS. 3135 035 21852
0323 Washer, Flat, f/Light Eng. Adj. Studs (6 used). 3135 030 40171
0324 Nut, M5, f/Light Eng. Adj. Studs (3 used) 3135 030 40181
1085 Remote Transmitter, RC4308/01B 3128 147 16361
5213 Speaker, 8 ohm, 25W, Woofer (2 used). . 2422 264 00463
5214 Speaker, 8 ohm, 25W, Twetter (2 used). . 2422 264 00464
S 8190 Mainscord, USA, 7A, 2M4, VH BK 2422 070 98164
8610 Cable, DVI-D/450/DVI-D 3135 031 02121

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-10-2004
Rev. Date: 08-10-2004
Print Date: 2004-08-10

Return to Index

PARTS LIST
62PL9524

Lamp Driver Panel Parts

3D Comb Filter Panel Parts
Main Power Panel Parts
Rear Jack Panel Parts
System Panel Parts
LED Sensor Panel Parts
Side Jack Panel Parts
LED/Keyboard Panel Parts
Thermal Sensor Panel Parts
Input Power Panel Parts
Audio Amp Panel Parts
DW PIP Panel Parts
SSB Panel Parts
Scaler Board MSB Panel Parts
Cabinet & Accessory Parts

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LAMP DRIVER PANEL

LAMP DRIVER PANEL
LAMP DRIVER PANEL. 9137 001 77405

3D Comb Filter Panel Parts

3D Comb Filter Panel Parts
1153 3D Comb Panel Asm. 3135 037 10261
0001 Shield, Bottom 3135 031 20101
0002 Shield, Top. 3135 031 20092
1001 Resonator, Crystal, 20MHz 2422 543 01273
1008 Connector, 9 Pin 2422 025 17802
1009 Connector, 9 Pin 2422 025 17802
2000 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2001 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2002 Cap, 47u, 20%, 20v, Electrolytic 3198 032 58170
2003 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2004 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2005 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2006 Cap, 47u, 20%, 20v, Electrolytic 3198 032 58170
2008 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2009 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2010 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2011 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2012 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2013 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2014 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2015 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2016 Cap, 10n, 10%, 50v, Ceramic. 3198 017 31030
2017 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2018 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2019 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2020 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2021 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2022 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2023 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2024 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2030 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2032 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2033 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2034 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2035 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2036 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2037 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2041 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2042 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2043 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2044 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2045 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2046 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2047 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2048 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2049 Cap, 47u, 20%, 16v, Electrolytic 3198 030 44790
2051 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2052 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2053 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2054 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2055 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2056 Cap, 10u, 20%, 20v, Electrolytic 3198 032 55130
2057 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2059 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2061 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2062 Cap, 150p, 5%, 50v, Ceramic. 3198 016 31510
2063 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2064 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2065 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2066 Cap, 100n, 10%, 16v, Ceramic 3198 017 31040
2067 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2068 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2069 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
2070 Cap, 22p, 5%, 50v, Ceramic 3198 016 32290
3000 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3001 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3002 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3003 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3004 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3005 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3006 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3007 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3008 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3009 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3010 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3011 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3012 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3013 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3014 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3015 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3016 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3017 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3018 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3019 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3020 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3021 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3022 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3023 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3024 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3025 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3026 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3027 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3028 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3029 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3030 Res, 820 ohm, 5%, 1/16W, Metalized Glass 3198 021 38210
3031 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3032 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3033 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3034 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3035 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3036 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3037 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3038 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3039 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3040 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3041 Res, 820 ohm, 5%, 1/16W, Metalized Glass 3198 021 38210
3042 Res, 3K3, 1%, 1/16W, Metalized Glass . . 2322 704 73302
3043 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3044 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3055 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3056 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3057 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3058 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3059 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3060 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3061 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3065 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3067 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3068 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3069 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3071 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3072 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3074 Res, 330 ohm, 5%, 1/16W, Metalized Glass 3198 021 33310
3076 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3077 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3082 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3083 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3085 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3088 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3089 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3091 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3095 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3096 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3097 Res, 1K8, 5%, 1/16W, Metalized Glass . . 3198 021 31820
3098 Res, 5K6, 5%, 1/16W, Metalized Glass . . 3198 021 35620
3099 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3100 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3101 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3102 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3103 PTC, 6V, 1R3 . . . . . 2122 662 00139
3104 PTC, 6V, 1R3 . . . . . 2122 662 00139
3105 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
5000 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5001 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5003 Filter, Fixed, 14M3. . . . . 2422 549 44784
5004 Filter, Fixed, 14M3. . . . . 2422 549 44784
5005 Coil, 10u. 3198 018 41090
5006 Filter, Fixed, 14M3. . . . . 2422 549 44785
5007 Coil, 10u. 3198 018 41090
5008 Coil, 22u. 3198 018 72290
5009 Coil, 22u. 3198 018 72290
5010 Coil, 15u. 2422 535 94758
5011 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5012 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5013 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5014 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5015 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5017 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5019 Coil, 10u. 3198 018 41090
5020 Coil, 10u. 3198 018 41090
5021 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5022 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5024 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5025 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5027 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5028 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5029 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
5030 Inductor, Fixed, 100Mhz, 120 ohm 3198 018 90070
6000 Diode, Signal, BAV99 . . . . . 3198 010 10620
6001 Diode, Signal, BAV99 . . . . . 3198 010 10620
6002 Diode, Signal, BAV99 . . . . . 3198 010 10620
6003 LED, VS, TLMH3100. . . . . 9322 072 71685

S = Safety Part Be sure to use exact replacement part.

6004	Diode, Rect, S1D.	9322 128 69685	
6005	Diode, Rect, S1D.	9322 128 69685	
6006	Diode, Signal, 1PS76SB10	9340 453 90115	
6007	Diode, Signal, BAS17	9335 262 30215	
7000	Transistor, NPN, BC847B.	9335 895 90215	
7001	Transistor, PNP, BC857B.	9335 897 60215	
7002	Transistor, NPN, BF570	9338 144 20215	
7003	Transistor, PNP, BC857B.	9335 897 60215	
7004	Transistor, NPN, BC847B.	9335 895 90215	
7005	Transistor, PNP, BC857B.	9335 897 60215	
7006	Transistor, NPN, BF570	9338 144 20215	
7007	Transistor, PNP, BC857B.	9335 897 60215	
7008	Transistor, NPN, BC847B.	9335 895 90215	
7009	Transistor, PNP, BC857B.	9335 897 60215	
7010	Transistor, NPN, BC847B.	9335 895 90215	
7011	Transistor, NPN, BC847B.	9335 895 90215	
7012	Transistor, PNP, BF550	9334 509 00215	
7015	Transistor, NPN, BC847B.	9335 895 90215	
7016	Transistor, PNP, BC857B.	9335 897 60215	
7017	Transistor, NPN, BC847B.	9335 895 90215	
7019	IC, LM809M3-3.08	9322 163 48668	
7020	Transistor, NPN, BC847B.	9335 895 90215	
7021	IC, LD1117DT33	9322 134 45668	
7022	IC, LD1117DT25	9322 160 50668	
7023	IC, UPD64083GF	9322 170 65671	

Main Power Panel Parts

Main Power Panel Parts

0218	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0219	Clip, Transistor	3135 011 02681	
0220	Spring Clip.	3139 121 24583	
0221	Spring Clip.	3139 121 24583	
0300	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0301	Clip, Transistor	3135 011 02681	
0302	Spring Clip.	3139 121 24583	
0305	Spring Clip.	3139 121 24583	
0306	Spring Clip.	3139 121 24583	
1206	Connector, 1 Pin	2422 015 18552	
1218	Heatsink	3135 031 60071	
1219	Heatsink, Dual TO-220.	3135 031 60133	
1300	Heatsink	3135 031 60071	
1302	Heatsink, Dual TO-220.	3135 031 60133	
1305	Heatsink, Dual TO-220.	3135 031 60133	
1311	Connector, 6 Pin, BM, V, M	2422 025 14044	
1312	Connector, 7 Pin	2422 025 11244	
1313	Connector, 8 Pin, BM, V, M	2422 025 10648	
1314	Connector, 9 Pin, BM, V, M	2422 025 12827	
1315	Connector, 10 Pin, BM, V, M.	2422 025 15085	
2220	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2221	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2222	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2223	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2226	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2233	Cap, 330p, 10%, 1KV, Ceramic	3198 019 63310	
2235	Cap, 1n, 10%, 1KV, Ceramic	3198 019 51020	
2236	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2237	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2238	Cap, 3300u, 20%, 16V, Electrolytic	2020 021 91816	
2239	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2240	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2241	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2243	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2244	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2245	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2246	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2247	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2265	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2310	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2312	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2320	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2321	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2323	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2333	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2335	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2336	Cap, 4n7, 10%, 400V, Metalized Polyester	2222 365 55472	
2337	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2338	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2339	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2340	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2341	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2342	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2343	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2344	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2345	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2347	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2348	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2349	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2350	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2351	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2352	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2353	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2354	Cap, 22u, 20%, 100V, Electrolytic.	2020 021 91813	
2355	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2356	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2357	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2358	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2360	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2361	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2362	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2363	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2364	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2365	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2366	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2367	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
3221	Res, 33K, 5%, 1W, Metal Film	3198 012 13330	
3222	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3223	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3224	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3226	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3227	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3228	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3229	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790	
3230	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3231	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3233	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080	
3237	Res, 10K7, 1%, 3/5W, Metal Film.	2312 915 11073	
3238	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3252	Res, 22 ohm, 1%, 3/5W, Metal Film.	2312 915 12209	
3253	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3254	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	
3255	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3256	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3257	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3259	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3260	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	
3321	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
3322	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3323	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3324	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3325	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3326	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3327	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3328	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	
3329	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	
3330	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	
3331	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710	
3332	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630	
3333	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	
3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3335	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3338	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3339	Res, 1K, 5%, 1 1/3W, Metal Film.	3198 012 21020	
3340	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
S 3341	Res, 680 ohm, 5%, 3W, Metal Film	3198 012 36810	
3342	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3343	Res, 1K8, 1%, 1/10W, Metalized Glass	2120 108 92618	
3344	Res, 750K, 1%, 3/5W, Metal Film.	2312 915 17504	
3345	Res, 27K, 1%, 1/8W, Metalized Glass.	2322 734 62703	
3346	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3347	Res, 10 ohm, 5%, 1W, Metal Film.	3198 012 11090	
3348	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3349	Res, 0R47, 5%, 3/5W, Metal Film.	3198 012 14770	
3350	Res, 8R2, 5%, 1/4W, Carbon Film.	2120 101 74828	
3351	Res, 0R1, 5%, 1 1/3W, Metal Film	3198 012 21070	
3352	Res, 2K7, 1%, 3/5W, Metal Film	2312 915 12702	
3353	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3354	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3355	Res, 150K, 5%, 1/6W, Carbon Film	3198 011 01540	
3356	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3357	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3358	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3359	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	
S 5201	Line Filter, 100uH, 2.2A	2422 549 44101	
5208	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5209	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5210	Switching Transformer, US28207-00.	2422 531 02555	
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5213	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5215	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5216	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5217	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5301	Line Filter, 100uH, 2.2A	2422 549 44101	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5308	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5309	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5310	Switching Transformer, US28212-02.	2422 531 02594	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	

S = Safety Part Be sure to use exact replacement part.

5316	Coil, 10u.	2422 535 94639
5317	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Coil, 10u.	2422 535 94639
5321	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5322	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5325	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5326	Coil, 10u.	2422 535 95363
5327	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5328	Coil, 330u	2422 535 94863
6201	Diode, Rect, BY229X-800	9340 380 30127
6202	Zener Diode, 5.1 volt.	3198 010 55180
6202	Zener Diode, 5.1 volt.	3198 010 55180
6204	Diode, Rect., PBYR10100X.	9340 555 24127
6205	Diode, Rect, BYV95C	9335 001 80133
S 6207	IC, Optocoupler.	9338 941 50682
6209	Diode, Signal, BAV21	3198 010 10070
6301	Diode, Rect, BY229X-800	9340 380 30127
6305	Diode, Rect, BYV95C	9335 001 80133
6306	Diode, Signal, BAV21	3198 010 10070
S 6307	IC, Optocoupler.	9338 941 50682
6308	Zener Diode, 5.1 volt.	3198 010 55180
6309	Diode, Signal, BAV21	3198 010 10070
6312	Diode, Rect, SB360L-7024	9322 161 78682
6313	Diode, Rect, BYV95C	9335 001 80133
6314	Diode, Rect, BYW29EX-200.	9340 412 80127
6315	Diode, Rect., PBYR10100X.	9340 555 24127
6316	Diode, Rect, BYW95C-24.	9340 559 53112
7202	IC, PWM Off-line Switcher.	9322 166 44687
7203	Transistor, N Ch. FET, 2SK2886	9322 199 01687
7206	IC, Prog. Ref. Regulator	9322 115 98676
7209	IC, Prog. Ref. Regulator	9322 115 98676
7210	Transistor, PNP, BC557B.	3198 020 40110
7211	Transistor, NPN, BC547B.	3198 020 40030
7302	IC, PWM Off-line Switcher, TOP247Y	9322 181 88687
7303	Transistor, N Ch. FET, 2SK2886	9322 199 01687
7304	IC, Prog. Ref. Regulator	9322 115 98676
7306	IC, Prog. Ref. Regulator	9322 115 98676
7307	IC, Inverting Step Switch Reg., MC34063A	9322 036 71682
7308	Transistor, P Ch. FET, 2SJ334.	9322 199 02687
7309	IC, Prog. Ref. Regulator	9322 115 98676
7310	Transistor, PNP, BC557B.	3198 020 40110
9001	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9016	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9018	Wire Jumper, 0.58MM.	3198 036 90010
9019	Wire Jumper, 0.58MM.	3198 036 90010
9020	Wire Jumper, 0.58MM.	3198 036 90010
9024	Wire Jumper, 0.58MM.	3198 036 90010
9025	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9032	Wire Jumper, 0.58MM.	3198 036 90010
9033	Wire Jumper, 0.58MM.	3198 036 90010
9317	Wire Jumper, 0.58MM.	3198 036 90010
9318	Wire Jumper, 0.58MM.	3198 036 90010
1010	Main Power Supply Panel Asm.	3135 037 10663

Rear Jack Panel Parts

Rear Jack Panel Parts

1016	Rear Jack Panel Asm.	3135 037 10692
1200	Connector, 4 Pin	2422 025 12479
1201	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
1203	Connector, 4 Pin	2422 025 12479
1205	Connector, 3 Pin	2422 025 09191
1207	Connector, 5 Pin	2422 025 12481
1208	Connector, 5 Pin	2422 025 12481
1214	Socket, Cinch, 4 Pin	2422 026 05093
1217	Socket, Cinch, 1 Pin	2422 026 04378
1218	Socket, MDIN, 10 Pin	2422 026 04926
1219	Socket, MDIN, 10 Pin	2422 026 04926
1220	Connector, 64 Pin.	2422 025 17714
1251	Socket, Cinch, 12 Pin.	2422 026 05106
2111	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2112	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2113	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2114	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2115	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2116	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2117	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2118	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2119	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2120	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
2121	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2122	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2123	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2124	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2149	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2150	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2151	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2152	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2153	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2154	Cap, 100n, +80/-20%, 50v, Ceramic.	2020 552 95499
2155	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2156	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2157	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2158	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2159	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2160	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2161	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2162	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2163	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2164	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2165	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2166	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2167	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2168	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2169	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2170	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2171	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2173	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2174	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2175	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2176	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2177	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2178	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2180	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2182	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2183	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2184	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2185	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2186	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2187	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2188	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2189	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
3117	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3118	Res, 30K, 1%, 1/8W, Metalized Glass.	2322 734 63003
3119	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3120	Res, 51K, 1%, 1/8W, Metalized Glass.	2322 734 65103
3121	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3122	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3125	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3128	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3129	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3130	Res, 1 ohm, 5%, 1/10W, Metalized Glass	3198 021 51080
3131	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3133	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3134	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3136	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3137	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3139	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3140	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3141	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3142	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3143	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3144	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3145	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3155	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3156	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3157	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3158	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3159	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3160	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3161	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3162	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3173	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3174	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3175	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3176	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3181	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3182	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3183	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3184	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3185	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3186	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3187	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

3188 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3189 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3190 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3191 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3192 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3193 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3220 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3221 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3222 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3223 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3224 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3225 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3226 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3227 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3228 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3229 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3230 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3231 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3232 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3233 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3234 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3235 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3237 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3238 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3243 Res, 68 ohm, 5%, 1/10W, Metalized Glass. 3198 021 56890
3244 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3245 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3246 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3247 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3248 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
4000 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4004 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4005 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4006 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4007 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4008 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4009 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4010 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4011 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4012 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4013 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4014 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4015 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4016 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4017 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4018 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4019 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4020 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4021 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4022 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4023 Res, Zero ohm, "Chip" Jumper 3198 021 90020
6101 Zener Diode, 6.8 volt. 3198 020 56880
6102 Zener Diode, 6.8 volt. 3198 020 56880
6103 Zener Diode, 6.8 volt. 3198 020 56880
6104 Zener Diode, 6.8 volt. 3198 020 56880
6105 Zener Diode, 6.8 volt. 3198 020 56880
6106 Zener Diode, 6.8 volt. 3198 020 56880
6107 Zener Diode, 6.8 volt. 3198 020 56880
6108 Zener Diode, 6.8 volt. 3198 020 56880
6109 Zener Diode, 6.8 volt. 3198 020 56880
6110 Zener Diode, 6.8 volt. 3198 020 56880
6111 Zener Diode, 6.8 volt. 3198 020 56880
6112 Zener Diode, 6.8 volt. 3198 020 56880
6113 Zener Diode, 6.8 volt. 3198 020 56880
6114 Zener Diode, 6.8 volt. 3198 020 56880
6115 Zener Diode, 6.8 volt. 3198 020 56880
6116 Zener Diode, 6.8 volt. 3198 020 56880
6117 Zener Diode, 6.8 volt. 3198 020 56880
6118 Zener Diode, 6.8 volt. 3198 020 56880
6119 Zener Diode, 6.8 volt. 3198 020 56880
6120 Zener Diode, 6.8 volt. 3198 020 56880
6121 Diode, Signal, BAV99 . . . . . 9332 153 70215
6122 Diode, Signal, BAV99 . . . . . 9332 153 70215
6123 Diode, Signal, BAV99 . . . . . 9332 153 70215
6124 Diode, Signal, BAV99 . . . . . 9332 153 70215
6125 Diode, Signal, BAV99 . . . . . 9332 153 70215
6126 Diode, Signal, BAV99 . . . . . 9332 153 70215
6128 Diode, Signal, BAV99 . . . . . 9332 153 70215
6129 Diode, Signal, BAV99 . . . . . 9332 153 70215
6130 Diode, Signal, BAV99 . . . . . 9332 153 70215
6132 Diode, Signal, BAV99 . . . . . 9332 153 70215
6161 Zener Diode, 6.8 volt. 3198 020 56880
6162 Zener Diode, 6.8 volt. 3198 020 56880
7100 IC, CXA2089S 9322 162 27682
7102 Transistor, NPN, BC847B. 3198 010 42030
7105 Transistor, NPN, BC847B. 3198 010 42030
7107 Transistor, NPN, BC847B. 3198 010 42030
7108 Transistor, NPN, BC847B. 3198 010 42030
7109 Transistor, NPN, BC847B. 3198 010 42030
7110 Transistor, NPN, BC847B. 3198 010 42030
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9004 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9006 Wire Jumper, 0.58MM. 3198 036 90010
9007 Wire Jumper, 0.58MM. 3198 036 90010
9008 Wire Jumper, 0.58MM. 3198 036 90010
9009 Wire Jumper, 0.58MM. 3198 036 90010
9010 Wire Jumper, 0.58MM. 3198 036 90010
9100 Wire Jumper, 0.58MM. 3198 036 90010
9101 Wire Jumper, 0.58MM. 3198 036 90010
9102 Wire Jumper, 0.58MM. 3198 036 90010
9103 Wire Jumper, 0.58MM. 3198 036 90010
9104 Wire Jumper, 0.58MM. 3198 036 90010
9105 Wire Jumper, 0.58MM. 3198 036 90010
9106 Wire Jumper, 0.58MM. 3198 036 90010
9107 Wire Jumper, 0.58MM. 3198 036 90010
9108 Wire Jumper, 0.58MM. 3198 036 90010
9109 Wire Jumper, 0.58MM. 3198 036 90010
9110 Wire Jumper, 0.58MM. 3198 036 90010
9111 Wire Jumper, 0.58MM. 3198 036 90010
9112 Wire Jumper, 0.58MM. 3198 036 90010
9113 Wire Jumper, 0.58MM. 3198 036 90010
9114 Wire Jumper, 0.58MM. 3198 036 90010
9115 Wire Jumper, 0.58MM. 3198 036 90010
9116 Wire Jumper, 0.58MM. 3198 036 90010

System Panel Parts

System Panel Parts
1020 System Panel Asm.. . . . . 3135 037 10712
1008 Connector, 9 Pin 2422 025 16049
1009 Connector, 9 Pin 2422 025 16049
1200 Connector, 5 Pin 2422 025 12481
1201 Connector, 10 Pin. 2422 025 12484
1202 Switch, Tactile. 2422 128 02742
1203 Tuner, V+U PLL 2422 542 90077
1204 Switch, Tactile. 2422 128 02742
1205 Connector, SIMM, 80 Pin. 2422 025 16599
1207 Connector, 4 Pin 2422 025 12479
1210 Connector, 64 Pin. 2422 025 17715
1214 Connector, 10 Pin. 2422 025 12484
1215 Connector, 1 Pin 2422 015 18552
1216 Connector, 1 Pin 2422 015 18551
1217 Connector, 1 Pin 2422 015 18552
1218 Connector, 1 Pin 2422 015 18552
1220 Connector, 64 Pin. 2422 025 17715
1241 Connector, 7 Pin 2422 025 11244
1244 Connector, 3 Pin 2412 020 00725
1251 Connector, 3 Pin 2412 020 00725
1252 Connector, 6 Pin 2422 025 17955
1262 Connector, 3 Pin 2422 025 10768
1303 Connector, 5 Pin 2422 025 10428
1305 Connetort, 7 Pin 2422 025 09407
1312 Connector, 7 Pin 2422 025 11244
1313 Connector, 8 Pin 2422 025 10648
1314 Connector, 9 Pin 2422 025 12827
1335 Connector, 11 Pin. 2422 025 12485
1337 Connector, 1 Pin 2422 015 18552
1344 Connector, 5 Pin 2422 025 12481
1403 Connector, 12 Pin. 2422 025 08333
1600 Resonator Crystal, 12Mhz, 20P, DSX840 R. 2422 543 01095
1681 Connector, 3 Pin 2422 025 10768
1683 Connector, 5 Pin, FFC 0.3. . . . . 2422 025 16563
1700 Connector, 8 Pin 2422 025 12483
2101 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2102 Cap, 100u, 20%, 50v, Electrolytic. . . . 3198 025 51010
2103 Cap, 220u, 20%, 16v, Electrolytic. . . . 3198 025 22210
2104 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2105 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2106 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2107 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2108 Cap, 2u2, 20%, 25v, Electrolytic 2020 021 91551
2109 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2110 Cap, 470u, 20%, 16v, Electrolytic. . . . 2020 021 91687
2111 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2112 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2113 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2114 Cap, 1000u, 20%, 16v, Electrolytic . . . 3198 026 21020
2115 Cap, 2u2, 20%, 10v, Electrolytic 2020 021 91668
2116 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2117 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2118 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2119 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2120 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2121 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2122 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2123 Cap, 330u, 20%, 16v, Electrolytic. . . . 2020 021 91536
2124 Cap, 470u, 20%, 10v, Electrolytic. . . . 2020 021 91569
2125 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2126 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020

2127 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2129 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2130 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2201 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2202 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2203 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2204 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2205 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2206 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2207 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2208 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2209 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2210 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2211 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2212 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2213 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2214 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2215 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2216 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2218 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2219 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2301 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2302 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2303 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2306 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2307 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2308 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2309 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2312 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2313 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2314 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2315 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2316 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2317 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2318 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2319 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2320 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2321 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2322 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2323 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2324 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2325 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2326 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2327 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2328 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2329 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2330 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2331 Cap, 22n, +80/-20%, 50v, Ceramic 3198 017 22230
2332 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2333 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2334 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2335 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2336 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2337 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2338 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2339 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2340 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2341 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2342 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2343 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2344 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2345 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2347 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2348 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2349 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2350 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2351 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2352 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2353 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2354 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2355 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2356 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2357 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2358 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2359 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2360 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2361 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2362 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2363 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2364 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2365 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2366 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2367 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2368 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2369 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2370 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2371 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2372 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2374 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2375 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2376 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2377 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2378 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2379 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2380 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2381 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2382 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2383 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2384 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2385 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2386 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2387 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2388 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2389 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2390 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2391 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2392 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2393 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2394 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2395 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2396 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
3101 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3102 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3106 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3108 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3109 Res, 10K, 1%, 1/8W, Metalized Glass. . . 2322 734 61003
3110 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3111 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3112 Res, 120K, 1%, 1/8W, Metalized Glass . . 2322 734 61204
3113 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3118 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3119 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3120 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3121 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3122 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3201 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3202 Res, 3K9, 5%, 1/10W, Metalized Glass . . 3198 021 53920
3203 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3204 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3205 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3206 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3207 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3208 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3209 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3210 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3211 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3212 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3213 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3214 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3215 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3216 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3217 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3218 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3219 Res, 270 ohm, 5%, 1/10W, Metalized Glass 3198 021 52710
3220 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3221 Res, 27K, 5%, 1/10W, Metalized Glass . . 3198 021 52730
3222 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3223 Res, 180 ohm, 5%, 1/10W, Metalized Glass 3198 021 51810
3224 Res, 330 ohm, 5%, 1/10W, Metalized Glass 3198 021 53310
3225 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3226 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3227 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3228 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3229 Res, 22 ohm, 5%, 1/10W, Metalized Glass. 3198 021 52290
3230 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3231 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3232 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3234 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3235 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 2322 734 66801
3236 Res, 560 ohm, 5%, 1/10W, Metalized Glass 3198 021 55610
3237 Res, 1K2, 1%, 1/8W, Metalized Glass. . . 2322 734 61202
3238 Res, 220K, 5%, 1/10W, Metalized Glass. . 3198 021 52240
3239 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3240 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3241 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3242 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3243 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 2322 734 62202
3305 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3306 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3307 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3308 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3309 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3310 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3311 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3312 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3313 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3314 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3315 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3316 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3317 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320

S = Safety Part Be sure to use exact replacement part.

3318 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3319 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3320 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3321 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3323 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3324 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3325 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3326 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3328 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3329 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3330 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3331 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3332 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3333 Res, 33 ohm, 5%, 1/10W, Metalized Glass. 3198 021 53390
3334 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3335 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3336 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3337 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3338 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3339 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3340 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3341 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3342 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3343 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3344 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3345 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3346 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3347 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3348 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3349 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3350 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3351 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3352 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3353 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3354 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3355 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3356 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3357 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3358 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3359 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3360 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3361 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3362 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3363 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3364 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3365 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3366 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3370 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3371 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3372 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3373 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3374 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3375 Res, 15K, 5%, 1/10W, Metalized Glass . . 3198 021 51530
3376 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3377 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3378 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3379 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3380 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3381 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3382 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3383 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3384 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3385 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3390 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3391 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3392 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3393 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3394 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3395 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3396 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
4104 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4105 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4106 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4107 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4108 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4109 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4110 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4118 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4119 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4120 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4121 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4129 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5101 Coil, 6u8. . . . . 2422 535 94819
5102 Coil, 1u 2422 535 95387
5103 Coil, 1u 2422 535 95387
5104 Coil, 1u 2422 535 95387
5106 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5107 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5108 Coil, 1u 2422 535 95387
5109 Coil, 1u 2422 535 95387
5110 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5111 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5112 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5113 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5301 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5302 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5303 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5304 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5305 Coil, 2u2. . . . . 3198 018 42280
5306 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5307 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5308 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5309 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5310 Coil, 8u2. . . . . 3198 018 28280
5311 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5312 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5313 Coil, 330u 2422 535 94649
5315 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5316 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5317 Coil, 8u2. . . . . 2422 535 96517
6101 Diode, Signal, BAS316. . . . . 3198 010 10630
6102 Diode, Signal, BAS316. . . . . 3198 010 10630
6103 Diode, Signal, BAS316. . . . . 3198 010 10630
6104 Diode, Signal, BAS316. . . . . 3198 010 10630
6105 Diode, Rect, SB140. . . . . 9339 577 60673
6106 Diode, Signal, BAS316. . . . . 3198 010 10630
6107 Diode, Signal, BAS316. . . . . 3198 010 10630
6108 Diode, Signal, BAS316. . . . . 3198 010 10630
6109 Diode, Signal, BAS316. . . . . 3198 010 10630
6110 Diode, Signal, BAS316. . . . . 3198 010 10630
6111 Diode, Signal, BAS316. . . . . 3198 010 10630
6112 Zener Diode, 15 volt 9335 006 90133
6113 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6114 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6201 Zener Diode, 6.8 volt. 9340 548 55115
6202 Zener Diode, 6.8 volt. 9340 548 55115
6300 Diode, Signal, BAS316. . . . . 3198 010 10630
6301 Diode, Signal, BAS316. . . . . 3198 010 10630
6302 Diode, Signal, BAS316. . . . . 3198 010 10630
6304 Diode, Signal, BAS316. . . . . 3198 010 10630
6305 Diode, Signal, BAS316. . . . . 3198 010 10630
6306 Diode, Signal, BAS316. . . . . 3198 010 10630
7001 Transistor, NPN, BC847B. 3198 010 42030
7002 Transistor, NPN, BC847B. 3198 010 42030
7003 Transistor, NPN, BC847B. 3198 010 42030
7004 Transistor, NPN, BC847B. 3198 010 42030
7005 Transistor, PNP, BC857B. 3198 010 42150
7006 Transistor, PNP, BC857B. 3198 010 42150
7007 Transistor, PNP, BC857B. 3198 010 42150
7008 Transistor, NPN, BC847B. 3198 010 42030
7009 Transistor, NPN, BC847B. 3198 010 42030
7010 Transistor, NPN, BC847B. 3198 010 42030
7011 Transistor, NPN, BC847B. 3198 010 42030
7012 Transistor, NPN, BC847B. 3198 010 42030
7013 Transistor, PNP, BC857B. 3198 010 42150
7014 F.E.T. STD3NK60Z. 9322 195 38668
7015 Transistor, PNP, BC857B. 3198 010 42150
7017 Transistor, PNP, BC857B. 3198 010 42150
7018 Transistor, NPN, BC847B. 3198 010 42030
7020 Transistor, NPN, BC847B. 3198 010 42030
7021 Transistor, NPN, BC847B. 3198 010 42030
7022 Transistor, NPN, BC847B. 3198 010 42030
7023 Transistor, NPN, BC847B. 3198 010 42030
7024 Transistor, PNP, BC857B. 3198 010 42150
7025 Transistor, NPN, BC847B. 3198 010 42030
7101 IC, TC74HC590AF-EL 9322 167 76668
7102 IC, TC74HC590AF-EL 9322 167 76668
7103 IC, CY7C199-15ZC 9322 153 66668
7104 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7105 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7106 IC, CD74ACT151M. 9322 195 64668
7107 IC, M24C32-WMN6. . . . . 9322 124 74668
7108 IC, P89C668HBA/00. . . . . 9352 654 18112
7109 IC, TL431BCLP. 9322 115 98676
7110 IC, TLC0832CD. 9322 185 44668
7111 IC, NE555D 9336 561 10623
7113 IC, TEA6422D 9322 116 87668
7114 IC, PCF8574T 9337 280 80118
7115 IC, TL431BCLP. 9322 115 98676
7116 IC, TDA7309D 9322 110 45668
7117 IC, TDA1308T/N1. . . . . 9350 721 10115
7118 IC, NE555D 9336 561 10623
7120 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
7121 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010

LED Sensor Panel Parts

LED Sensor Panel Parts

S = Safety Part Be sure to use exact replacement part.

1024 LED Panel Asm.	3135 037 10741
0207 Holder, LED.	3139 124 23831
0209 Holder, Photo Diode.	3104 304 19732
1201 Connector, 4 Pin	2422 025 12489
1214 Connector, 10 Pin.	2422 025 12493
2001 Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2002 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2003 Cap, 100u, 20%, 10v, Electrolytic.	3198 025 11010
2004 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
3001 Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3002 Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3003 Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3004 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3005 Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3006 Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3007 Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3008 Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3009 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3010 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3011 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3012 Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3013 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3016 Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4004 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4005 Res, Zero ohm, "Chip" Jumper	3198 021 90030
6000 LED, TLUV5300.	9338 792 00682
6003 IR Receiver, TSOP2136UH1	9322 159 21667
6004 Optical Sensor, BPW46.	9322 032 38682
7000 IC, LM358DR2	9339 265 90668
7001 Transistor, NPN, BC847B.	3198 010 42030

Side Jack Panel Parts

Side Jack Panel Parts

1028 Side Jack Panel Asm.	3135 037 10751
1300 Switch, Push, 2 Pin, 2 Position, 30v	2422 128 03068
1301 Socket, MDin, 4 Pin, TCS7959 Y	2422 026 05157
1302 Socket, Cinch, 3 Pin	2422 026 05493
1303 Socket, Phone, 1 Pin	2422 026 04747
1335 Connector, 11 Pin.	2422 025 12485
1337 Connector, 1 Pin	2422 015 18552
1344 Connector, 5 Pin	2422 025 12481
2107 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2108 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2109 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2110 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2111 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2112 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2113 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2114 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2115 Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
3106 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3115 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3116 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3117 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3119 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3120 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3121 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3122 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3123 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3124 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3125 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001 Coil, 270n	3198 018 32770
5002 Coil, 270n	3198 018 32770
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 Zener Diode, 6.8 volt.	9340 386 40115
6004 Zener Diode, 6.8 volt.	9340 386 40115
6005 Zener Diode, 6.8 volt.	9340 386 40115
6006 Zener Diode, 6.8 volt.	9340 386 40115
6007 Zener Diode, 6.8 volt.	9340 386 40115
6008 Zener Diode, 6.8 volt.	9340 386 40115
6009 Zener Diode, 6.8 volt.	9340 386 40115
6010 Zener Diode, 6.8 volt.	9340 386 40115
6011 Zener Diode, 6.8 volt.	9340 386 40115
6012 Zener Diode, 6.8 volt.	9340 386 40115

LED/Keyboard Panel Parts

LED/Keyboard Panel Parts

1032 LED/Keyboard Panel Asm..	3135 037 12561
1001 Switch, Tactile.	2422 128 02742
1002 Switch, Tactile.	2422 128 02742
1003 Switch, Tactile.	2422 128 02742
1004 Switch, Tactile.	2422 128 02742
1005 Switch, Tactile.	2422 128 02742
1006 Switch, Tactile.	2422 128 02742
1201 Connector, 4 Pin	2422 025 12489
1202 Connector, 1 Pin	2422 015 18551
1203 LED, Holder (Not Shown).	3135 034 00711
3001 Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322 734 63901
3002 Res, 200 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62001
3003 Res, 620 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66201
3004 Res, 1K1, 1%, 1/8W, Metalized Glass.	2322 734 61102
3006 Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3007 Res, 2K4, 1%, 1/8W, Metalized Glass.	2322 734 62402
3009 Res, 910 ohm, 1%, 1/8W, Metalized Glass.	2322 734 69101
3010 Res, 160 ohm, 1%, 1/8W, Metalized Glass.	2322 734 61601
3011 Res, 120 ohm, 5%, 1/10W, Metalized Glass	3198 021 51210
4000 Res, Zero ohm, "Chip" Jumper	3198 021 90020
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 LED, TLHB5400.	9322 188 10682
7000 Transistor, NPN, BC847B.	3198 010 42030

Thermal Sensor Panel Parts

Thermal Sensor Panel Parts

1034 Thermal Sensor Panel Asm..	3135 037 10781
1202 Connector, 3 Pin	2422 025 10775
2001 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2002 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3001 Res, 5K6, 1%, 1/8W, Metalized Glass.	2322 734 65602
3002 Res, 68K, 1%, 1/8W, Metalized Glass.	2322 734 66803
3003 Res, 820 ohm, 1%, 1/8W, Metalized Glass.	2122 118 05988
3004 Res, 680 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66801
3005 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
S 3006 NTC, 10K, 5%, 1/2W	2322 640 33103
3007 Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3008 Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
7001 Transistor, NPN, BC847B.	3198 010 42030
7002 Transistor, NPN, BC847B.	3198 010 42030

Input Power Panel Parts

Input Power Panel Parts

1045 Input Power Panel Asm.	3135 037 11421
0001 Insulator, SP-900.	3135 010 02331
0002 Clip, Transistor	3135 011 02681
0013 Spring	3139 121 24583
0014 Spring	3139 121 24583
0018 Insulator, SP-900.	3135 010 02331
0019 Clip, Transistor	3135 011 02681
0020 Spring	3139 121 24583
0201 Spring	3135 011 01041
0215 Insulator.	3135 010 02321
1206 Connector, 1 Pin	2422 015 18552
1208 Surge Protector, DSP-501N-A21F	2422 549 42349
1209 Connector, 1 Pin	2422 015 18552
S 1210 Relay, 1 Pin, 5V, 5A	2422 132 07411
S 1211 Fuse/Clip, 6A3, 250V, IEC.	2422 093 00036
1212 Connector, 4 Pin	2422 025 15503
S 1214 Protection Device, 5.5 KVDC, UL5500.	2422 549 43369
1215 Heatsink	3135 031 60051
1217 Connector, 1 Pin	2422 015 18552
1218 Connector, 1 Pin	2422 015 18552
1310 Connector, 2 Pin	2422 025 11196
1311 Connector, 6 Pin	2422 025 14044
1316 Connector, 4 Pin	2422 025 10647
1401 Heatsink	3135 031 60071
1402 Heatsink, TO-220	3135 031 60133
1403 Connector, 12 Pin.	2422 025 08333
1410 Connector, 2 Pin	2412 020 00724
1460 Connector, 3 Pin	2412 020 00725
1518 Heatsink	3135 031 60071
1520 Heatsink, TO-220	3135 031 60133
2200 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2201 Cap, 220n, 20%, 275v, Metalized Polypropylene	2222 336 29146
2202 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2203 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2205 Cap, 680n, 20%, 275v, Metalized Polypropylene	2222 336 29149
2209 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2210 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2211 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2212 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
S 2213 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2214 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2215 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2216 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2217 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2219 Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759
S 2220 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2225 Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2249 Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 2421 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2423 Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
2424 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557

S = Safety Part Be sure to use exact replacement part.

2431	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2432	Cap, 1n, 10%, 1000v, Ceramic	3198 019	61020
2433	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
S 2435	Cap, 470p, 10%, 50v, Ceramic	2020 554	90169
2436	Cap, 47u, 20%, 50v, Electrolytic	2020 021	91521
2437	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2441	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2442	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2443	Cap, 4n7, 10%, 50v, Ceramic.	3198 019	14720
2444	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2453	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2454	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2456	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2457	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2472	Cap, 220u, 20%, 10v, Electrolytic.	3198 025	12210
2473	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2522	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2523	Cap, 470p, 10%, 50v, Ceramic	3198 019	14710
2530	Cap, 220p, 10%, 1000v, Ceramic	3198 019	62210
2534	Cap, 100u, 20%, 400v, Electrolytic	2020 021	91759
2535	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2536	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2541	Cap, 10u, 20%, 50v, Electrolytic	2020 021	91808
2542	Cap, 10n, +80/-20%, 50v, Ceramic	3198 019	21030
2543	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019	22230
2544	Cap, 47u, 20%, 16v, Electrolytic	2020 021	91804
3204	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242	13225
3207	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3210	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3211	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
S 3212	VDR, DC, 1MA/495V, MAX 850VB.	2322 595	90021
3213	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3214	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3215	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3216	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3217	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103	90042
3218	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3219	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3245	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021	53320
3246	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3247	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3248	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3249	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3252	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3253	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3403	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011	01230
3425	Res, 100 ohm, 5%, 3W, Metal Film	2120 105	93581
3426	Res, 56K, 1%, 3/5W, Metal Film	2312 915	15603
3429	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3430	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3431	Res, 56K, 5%, 1/6W, Carbon Film.	3198 011	05630
3432	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3433	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3438	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3441	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011	04720
3444	Res, 820K, 1%, 3/5W, Metal Film.	2312 915	18204
3445	Res, 100K, 1%, 3/5W, Metal Film.	2312 915	11004
3453	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3456	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3460	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3461	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3462	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021	54720
3463	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3464	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021	52720
3465	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021	53920
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3470	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011	04790
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3472	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3473	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3474	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3475	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3476	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3522	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3526	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3533	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3536	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011	01090
3537	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3538	Res, 1K, 1%, 3/5W, Metal Film.	2312 915	11002
3539	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3540	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3541	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3542	Res, 120K, 1%, 3/5W, Metal Film.	2312 915	11204
3543	Res, 3K, 1%, 1/8W, Metalized Glass	2322 734	63002
3544	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021	52230
5210	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5211	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5213	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5218	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5406	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5407	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5408	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5409	Coil, 1u	2422 535	95387
5410	Transformer, SMT Layer, US28206-01	2422 531	02553
5411	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5412	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5417	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5419	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5420	Coil, 1u	2422 535	95387
5422	Coil, 1u	2422 535	95387
5502	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5503	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5507	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5509	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5510	Coil, Choke, 190uH, UC28214-03 Y	2422 536	00594
5514	Filter, Mains, 100uH, 2A2, W8051	2422 549	44101
6200	Diode, Signal, 1N4148.	3198 010	10010
6201	Diode, Bridge Rect, GBU6JL-7002	9322 138	08667
6202	Diode, Bridge Rect, GBU4JL-7002	9322 132	55667
6402	Diode, Signal, 1N4148.	3198 010	10010
6403	Diode, Signal, BAS316.	3198 010	10630
6404	Optic Coupler, CQY80NG	9338 941	50682
6405	Diode, Rect, BYV95C	9335 001	80133
6406	Zener Diode, 18 volt	3198 010	21890
6407	Zener Diode, 6.8 volt.	3198 010	26880
6408	Diode, Signal, BAS316.	3198 010	10630
6409	Diode, Signal, 1N4148.	3198 010	10010
6410	Optic Coupler, CQY80NG	9338 941	50682
6411	Diode, Rect, BY229X-800	9340 380	30127
6413	Diode, Rect, BYW29EX-200.	9340 412	80127
6414	Diode, Rect, BYW29EX-200.	9340 412	80127
6501	Diode, Rect, BYV29F-400	9338 673	00127
7211	Transistor, NPN, BC547B.	3198 020	40030
7212	Transistor, PNP, BC857B.	3198 010	42150
7402	IC, TOP247Y.	9322 181	88687
7406	IC, TL431BCLP.	9322 115	98676
7408	Transistor, PNP, BC857B.	3198 010	42150
7409	Transistor, NPN, BC847B.	3198 010	42030
7410	Transistor, PNP, BC857B.	3198 010	42150
7411	Transistor, NPN, BC847B.	3198 010	42030
7412	Transistor, PNP, BC857B.	3198 010	42150
7500	Transistor, PNP, BC857B.	3198 010	42150
7502	IC, TOP247Y.	9322 181	88687
7506	IC, TL431BCLP.	9322 115	98676
9010	Wire Jumper, 0.58MM.	3198 036	90010
9011	Wire Jumper, 0.58MM.	3198 036	90010
9016	Wire Jumper, 0.58MM.	3198 036	90010
9020	Wire Jumper, 0.58MM.	3198 036	90010
9022	Wire Jumper, 0.58MM.	3198 036	90010
9023	Wire Jumper, 0.58MM.	3198 036	90010
9024	Wire Jumper, 0.58MM.	3198 036	90010
9025	Wire Jumper, 0.58MM.	3198 036	90010
9026	Wire Jumper, 0.58MM.	3198 036	90010
9027	Wire Jumper, 0.58MM.	3198 036	90010
9028	Wire Jumper, 0.58MM.	3198 036	90010
9029	Wire Jumper, 0.58MM.	3198 036	90010
9201	Wire Jumper, 0.58MM.	3198 036	90010
9204	Wire Jumper, 0.58MM.	3198 036	90010
9206	Wire Jumper, 0.58MM.	3198 036	90010
9207	Wire Jumper, 0.58MM.	3198 036	90010

Audio Amp Panel Parts

Audio Amp Panel Parts

0070	Clip, Transistor	3135 011	02681
0071	Insulator.	3135 010	02351
1012	Audio Amp Panel Asm.	3135 037	11412
1216	Connector, 1 Pin	2422 015	18551
1305	Connetort, 7 Pin	2422 025	09407
1316	Connector, 4 Pin	2422 025	10647
1321	Connector.	2422 025	15781
1700	Connector, 8 Pin	2422 025	12483
1701	Heatsink, Vertical, Audio.	3135 031	60151
1702	Thyristor, BT169B.	9338 268	50126
1703	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
1704	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
2701	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2702	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2703	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2704	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2705	Cap, 2u2, 20%, 50v, Electrolytic	3198 025	52280
2706	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2707	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2708	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023	22240
2709	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2710	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2711	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2712	Cap, 220n, +80/-20%, 50v, Ceramic.	2238 580	19814
2713	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2714	Cap, 33n, 10%, 50v, Ceramic.	3198 017	03330
2715	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2716	Cap, 330p, 5%, 50v, Ceramic.	3198 016	03310
2717	Cap, 100p, 5%, 50v, Ceramic.	3198 016	01010

S = Safety Part Be sure to use exact replacement part.

2718 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2719 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2720 Cap, 220n, +80/-20%, 25v, Ceramic. . . . 3198 023 22240
2721 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2722 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2723 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2724 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2725 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2726 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2727 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2728 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2729 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2730 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2731 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2732 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2733 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2734 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2735 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2736 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2737 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2739 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2740 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2741 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2742 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2743 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2744 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2745 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2763 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2776 Cap, 47u, 20%, 50v, Electrolytic 3198 025 54790
2777 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2780 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
2781 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
3701 Res, 10K, 5%, 1/6W, Carbon Film. 3198 011 01030
3702 Res, 6K8, 5%, 1/6W, Carbon Film. 3198 011 06820
3703 Res, 33K, 5%, 1/10W, Metalized Glass . . 3198 021 53330
3704 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3705 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3706 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3707 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3708 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3709 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3710 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3711 Res, 120K, 5%, 1/4W, Carbon Film 2122 101 02074
3712 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3713 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3714 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3715 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
3716 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3717 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3718 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3719 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3720 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3721 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3722 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3723 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3724 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3725 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3726 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3727 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3728 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3729 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3730 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3731 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3732 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3733 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3734 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3790 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3791 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3792 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3793 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3796 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3797 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3798 Res, 3K3, 5%, 1/6W, Carbon Film. 3198 011 03320
3799 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
4700 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4701 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5701 Inductor, Fixed, 68uH, 10% 2422 536 00504
5702 Inductor, Fixed, 68uH, 10% 2422 536 00504
5707 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5708 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5713 Coil, 1u 2422 535 95387
5714 Coil, 1u 2422 535 95387
5715 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5716 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
6701 Diode, Signal, 1N4148. . . . . 3198 010 10010
6702 Diode, Signal, 1N4148. . . . . 3198 010 10010
6703 Diode, Signal, 1N4148. . . . . 3198 010 10010
6704 Diode, Signal, BAS316. . . . . 3198 010 10630
6705 Diode, Signal, BAS316. . . . . 3198 010 10630
6706 Diode, Signal, BAS316. . . . . 3198 010 10630
6707 Diode, Signal, BAS316. . . . . 3198 010 10630
6708 Diode, Signal, BAS316. . . . . 3198 010 10630
6709 Diode, Signal, BAS316. . . . . 3198 010 10630
6710 Diode, Signal, BAS316. . . . . 3198 010 10630
6711 Diode, Signal, BAS316. . . . . 3198 010 10630
7700 IC, TDA7490. . . . . 9322 147 50667
7701 Transistor, NPN, BC847B. 3198 010 42030
7704 Transistor, NPN, BC847B. 3198 010 42030
7705 Transistor, NPN, BC847B. 3198 010 42030
7706 Transistor, PNP, BC857B. 3198 010 42150
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 Transistor, NPN, BC847B. 3198 010 42030
9012 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9027 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9034 Wire Jumper, 0.58MM. 3198 036 90010

DW PIP Panel Parts

DW PIP Panel Parts
0200 Connector, Printed Circuit 4822 267 10734
0201 Connector, B10B-EH-A 4822 267 10557
0205 Connector, 10 Pin. 2422 025 16587
0207 Connector, Printed Circuit, 4 Pin. . . . 4822 267 10565
0236 Connector, Printed Circuit 4822 267 10735
0237 Connector, Printed Circuit, 1 Pin. . . . 4822 267 10676
1184 DW PIP Panel Asm.. . . . . 3139 177 20061
1327 Crystal, 12 Mhz. 4822 242 10694
1334 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1352 Filter, SAW, 45MHZ75. . . . . 2422 549 43074
1501 Crystal, Resonator, 32Khz76. . . . . 2422 543 01069
2261 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2262 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2265 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2269 Cap, 47n, 10%, 50v, Ceramic. 4822 126 13751
2301 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2302 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2303 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2306 Cap, 10n, 10%, 50V 5322 126 11583
2309 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2311 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2312 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2313 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2314 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2316 Cap, 22n, 10%, 25V 4822 126 14494
2317 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2319 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2321 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2322 Cap, 10u, 20%, 63V 4822 124 40248
2324 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2327 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2328 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2331 Cap, 2u2, 20%, 50v, Electrolytic 4822 124 22652
2332 Cap, 220n, +/-80/20, 25v, Ceramic. . . . 4822 126 14076
2333 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2334 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2335 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2336 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2338 Cap, 2,2nF, 10%, 63V, Ceramic. 4822 122 33127
2342 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2345 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2348 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2351 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2354 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2355 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2356 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2357 Cap, 10p, 1%, 50v, Ceramic 2238 861 18109
2372 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2373 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2374 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2375 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2376 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2377 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2380 Cap, 10u, 20%, 63V 4822 124 40248
2385 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2386 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2390 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2391 Cap, 100p, 5%, 50v, Ceramic. 2020 552 94427
2392 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2393 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2401 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2402 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2403 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2404 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2405 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2411 Cap, 10u, 20%, 63V 4822 124 40248
2412 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2415 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879

S = Safety Part Be sure to use exact replacement part.

2431 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2432 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2434 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2436 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2438 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2439 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2440 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2501 Cap, 22p, 5%, 50V Ceramic. 5322 122 32658
2502 Cap, 8.2p, 0.5%, 50V 4822 126 14487
2503 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2504 Cap, 68n, 10%, 25v, Ceramic. 2020 552 96325
2505 Cap, 560p, 10%, 50v, Ceramic 4822 126 14249
2506 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2507 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2508 Cap, 6n8, 10%, 63v, Ceramic. 5322 126 11582
2509 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2511 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2811 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2812 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2813 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2814 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2816 Cap, 10u, 20%, 63V 4822 124 40248
2817 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2818 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2819 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2821 Cap, 10u, 20%, 63V 4822 124 40248
2822 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2823 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2824 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2825 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2826 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2827 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2828 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2829 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2831 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2832 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2833 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2834 Cap, 10u, 20%, 63V 4822 124 40248
2836 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2837 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2838 Cap, 220u, 20%, 6.3v, Electrolytic . . . 4822 124 11912
2839 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2841 Cap, 10u, 20%, 63V 4822 124 40248
2842 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2843 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2844 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2846 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2847 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2848 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2849 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2851 Cap, 10u, 20%, 63V 4822 124 40248
2852 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2853 Cap, 10u, 20%, 63V 4822 124 40248
2854 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2856 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2857 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2861 Cap, 10u, 20%, 63V 4822 124 40248
2862 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2863 Cap, 22u, 50v, Electrolytic Aluminum . . 4822 124 81151
2864 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2866 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2867 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2868 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2869 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2871 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2872 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2873 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2874 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2876 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2877 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2878 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2879 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2891 Cap, 1nF, 10%, 63V, Ceramic. 5322 122 31647
2892 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2893 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2894 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2895 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2896 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2897 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2898 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2899 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
3263 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 4822 117 11449
3264 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3267 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3268 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3270 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3301 Res, 1k, 5%, 1/16W 4822 051 30102
3302 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3305 Res, 2K7, 1%, 1/8W, Metalized Glass. . . 4822 117 12955
3311 Res, 27K, 5%, 1/8W, Metalized Glass. . . 4822 051 20273
3312 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3315 Res, 39K, 1%, 1/8W, Metalized Glass. . . 4822 117 12708
3316 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3318 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3321 Res, 10k, 5%, 1/16W. 4822 051 30103
3322 Res, 8K2, 1%, 1/16W. 4822 117 12902
3324 Res, 390 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20391
3326 Res, 1K, 1%, 0,125W. 5322 117 12487
3327 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3329 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3330 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3333 Res, 1k, 5%, 1/16W 4822 051 30102
3334 Res, 470R, 5%, 0,062W. 4822 051 30471
3335 Res, 120 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20121
3336 Res, 1k, 5%, 1/16W 4822 051 30102
3338 Res, 75 ohm, 1%, 1/8W, Metalized Glass . 4822 117 11927
3339 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3340 Res, 2k2, 5%, 1/16W. 4822 051 30222
3341 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3344 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3346 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3347 Res, 390 ohm, 5%, 1/16W. 4822 051 30391
3348 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3364 Res, 1k, 5%, 1/16W 4822 051 30102
3365 Res, 1K, 1%, 0,125W. 5322 117 12487
3370 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3371 Res, 15K, 1%, 1/8W, Metalized Glass. . . 4822 116 83933
3374 Res, 4k7, 5%, 1/16W. 4822 051 30472
3381 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3382 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3383 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3384 Res, 10k, 5%, 1/16W. 4822 051 30103
3385 Res, 4k7, 5%, 1/16W. 4822 051 30472
3386 Res, 10k, 5%, 1/16W. 4822 051 30103
3387 Res, 39K, 5%, 0,062W 4822 051 30393
3388 Res, 10k, 5%, 1/16W. 4822 051 30103
3389 Res, 4k7, 5%, 1/16W. 4822 051 30472
3390 Res, 470R, 5%, 0,062W. 4822 051 30471
3401 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3402 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3403 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3404 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3405 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3411 Res, 47k, 1%, 1/16W. 4822 117 12925
3412 Res, 47k, 1%, 1/16W. 4822 117 12925
3413 Res, 1k, 5%, 1/16W 4822 051 30102
3414 Res, 47k, 1%, 1/16W. 4822 117 12925
3415 Res, 47k, 1%, 1/16W. 4822 117 12925
3416 Res, 1k, 5%, 1/16W 4822 051 30102
3417 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3418 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3419 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3423 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3424 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3431 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3432 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3437 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3438 Res, 470R, 5%, 0,062W. 4822 051 30471
3439 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3451 Res, 4k7, 5%, 1/16W. 4822 051 30472
3453 Res, 4k7, 5%, 1/16W. 4822 051 30472
3456 Res, 4k7, 5%, 1/16W. 4822 051 30472
3457 Res, 4k7, 5%, 1/16W. 4822 051 30472
3458 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3460 Res, 4k7, 5%, 1/16W. 4822 051 30472
3461 Res, 4k7, 5%, 1/16W. 4822 051 30472
3462 Res, 2R2, 5%, 1/3W,. 4822 052 10228
3501 Res, 470K, 5%, 1/8W, Metalized Glass . . 4822 051 20474
3502 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3503 Res, 470R, 5%, 0,062W. 4822 051 30471
3504 Res, 6K8, 5%, 0,062W 4822 051 30682
3506 Res, 10k, 5%, 1/16W. 4822 051 30103
3507 Res, 6K8, 1%, 1/8W, Metalized Glass. . . 4822 117 11507
3508 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3509 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3510 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3801 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3802 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3803 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3804 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3805 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3806 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3807 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3808 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3809 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3810 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3811 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3812 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3813 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3814 Res, 22k, 5%, 1/16W. 4822 051 30223
3816 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3817 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3818 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3821 Res, 150 ohm, 5%, 1/16W. 4822 051 30151

S = Safety Part Be sure to use exact replacement part.

3822 Res, 4k7, 5%, 1/16W. 4822 051 30472
3823 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3824 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3825 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3826 Res, 3k3, 5%, 1/16W. 4822 051 30332
3827 Res, 1K8, 1%, 0,063W 4822 117 12903
3828 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3829 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3832 Res, 39K, 5%, 0,062W 4822 051 30393
3833 Res, 3k3, 5%, 1/16W. 4822 051 30332
3834 Res, 1K8, 1%, 0,063W 4822 117 12903
3836 Res, 3k3, 5%, 1/16W. 4822 051 30332
3837 Res, 1K8, 1%, 0,063W 4822 117 12903
3838 Res, 39K, 5%, 0,062W 4822 051 30393
3839 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3846 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3854 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3856 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3857 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3858 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3862 Res, 1R, 5%, 0,33W 4822 052 10108
3863 Res, 1R, 5%, 0,33W 4822 052 10108
3865 Res, 3k3, 5%, 1/16W. 4822 051 30332
3866 Res, 1k, 5%, 1/16W 4822 051 30102
3868 Res, 1K8, 1%, 0,063W 4822 117 12903
3869 Res, 3k3, 5%, 1/16W. 4822 051 30332
3871 Res, 2k2, 5%, 1/16W. 4822 051 30222
3872 Res, 470R, 5%, 0,062W. 4822 051 30471
3873 Res, 1k5, 5%, 1/16W. 4822 051 30152
3874 Res, 1k5, 5%, 1/16W. 4822 051 30152
3876 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3878 Res, 1k, 5%, 1/16W 4822 051 30102
3879 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3881 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3884 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3886 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3887 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3888 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3889 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3890 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3891 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3892 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3893 Res, 1k5, 5%, 1/16W. 4822 051 30152
3894 Res, 2k2, 5%, 1/16W. 4822 051 30222
3895 Res, 470R, 5%, 0,062W. 4822 051 30471
3896 Res, 1k5, 5%, 1/16W. 4822 051 30152
3897 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3898 Res, 1k, 5%, 1/16W 4822 051 30102
4301 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4306 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4309 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4310 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4311 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4312 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4313 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4315 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4434 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4437 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4438 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4827 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4828 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
5261 Coil, Fixed, 5U6, 10%. 4822 157 11778
5309 Coil, 680n 4822 157 71334
5332 Coil, 680n 4822 157 71334
5333 Coil, 680n 4822 157 71334
5334 Coil, 680n 4822 157 71334
5349 Coil, 820n 4822 157 71694
5350 Coil, 15u. 3198 018 61590
5351 Coil, 15u. 3198 018 61590
5401 Coil, 4u7. . . . . 2422 535 94637
5501 Coil, 680n 4822 157 71334
5816 Filter, L/C, BLM21A121SPT 4822 157 11506
5818 Filter, L/C, BLM21A121SPT 4822 157 11506
5827 Filter, L/C, BLM21A121SPT 4822 157 11506
5834 Filter, L/C, BLM21A121SPT 4822 157 11506
5839 Filter, L/C, BLM21A121SPT 4822 157 11506
5848 Filter, L/C, BLM21A121SPT 4822 157 11506
5849 Filter, L/C, BLM21A121SPT 4822 157 11506
5851 Filter, L/C, BLM21A121SPT 4822 157 11506
5853 Filter, L/C, BLM21A121SPT 4822 157 11506
6412 Diode, BAS316. . . . . 4822 130 11397
6415 Diode, BAS316. . . . . 4822 130 11397
6801 Diode, Reference, UZ3.9B 4822 130 11564
6802 Diode, Reference, UZ3.9B 4822 130 11564
6803 Diode, BAS316. . . . . 4822 130 11397
7201 Tuner, V+U PLL 2422 542 90115
7301 IC, TDA8887H/N1. . . . . 9352 638 72557
7305 Transistor, NPN, BC847BW 3198 010 42310
7307 Transistor, NPN, BC847BW 3198 010 42310
7331 Transistor, NPN, BC857BW 3198 010 42320
7337 Transistor, NPN, BC847BW 3198 010 42310
7368 Transistor, NPN, BC847BW 3198 010 42310
7385 Transistor, NPN, BC847BW 3198 010 42310
7386 Transistor, NPN, BC847BW 3198 010 42310
7401 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7402 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7403 IC, Digital, MOS, M62320FP 4822 209 17345
7411 Transistor, NPN, BC847BW 3198 010 42310
7412 Transistor, NPN, BC847BW 3198 010 42310
7421 Transistor, NPN, BC857BW 3198 010 42320
7422 Transistor, NPN, BC857BW 3198 010 42320
7434 Transistor, BC369. . . . . 5322 130 44593
7438 Transistor, NPN, BC847BW 3198 010 42310
7501 IC, Digital, MOS, Z86130-12SSC 9322 147 01668
7801 IC, Digital, MOS DRAM, SAB9083H/N4 . . . 9352 639 83557
7802 IC, Analog Voltage/Current Regulator, LD1 117V33 . . . . . 9322 123 54687
7803 IC, TDA8601T/C1. . . . . 4822 209 12776
7804 IC, Digital, MOS, Standard Logic, 74HC1G32GW. 9352 457 50115
7805 Transistor, NPN, BC847BW 3198 010 42310
7806 Transistor, NPN, BC847BW 3198 010 42310
7807 Transistor, NPN, BC847BW 3198 010 42310
7808 Transistor, NPN, BC847BW 3198 010 42310
7809 Transistor, NPN, BC847BW 3198 010 42310
7810 Transistor, NPN, BC847BW 3198 010 42310
7824 Transistor, NPN, BC847BW 3198 010 42310
7828 Transistor, NPN, BC847BW 3198 010 42310
7832 Transistor, NPN, BC847BW 3198 010 42310
7871 Transistor, NPN, BC847BW 3198 010 42310
7874 Transistor, NPN, BC847BW 3198 010 42310
7876 Transistor, NPN, BC857BW 3198 010 42320
7891 Transistor, NPN, BC847BW 3198 010 42310
7892 Transistor, NPN, BC847BW 3198 010 42310
7893 Transistor, NPN, BC847BW 3198 010 42310
7894 Transistor, NPN, BC857BW 3198 010 42320
7895 Transistor, NPN, BC847BW 3198 010 42310

SSB Panel Parts

SSB Panel Parts
1001 Crystal Resonator, 6MHz, 20p 2422 543 89022
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1102 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1103 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1104 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1105 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1185 SSB Panel Assembly 3135 037 12471
1303 Connector, 5 Pin, M. 2422 025 16966
1304 Connector, 7 Pin, M. 2422 025 17104
1308 Crystal Resonator, 3.579545MHz., 16P, HC49/U A. 2422 543 01183
1401 Connector, V, 10 Pin,, F 2422 025 16729
S 1403 Fuse, 500mA, F, 50V. 2422 086 11092
1406 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1410 Filter, S.A.W. 45Mhz75 . . . . . 2422 549 44377
1411 Filter, Ceramic, 4.5Mhz. 2422 549 44534
1651 Crystal Resonator, 18.432MHz, 12P. . . . 2422 543 89019
1680 Connector, V, 6 Pin, M 2422 025 16961
1681 Connector, 3 Pin, V, M 2422 025 17103
1682 Connector, V, 10 Pin,, F 2422 025 16729
1683 Connector, V, 5 Pin, F 2422 025 16793
1702 Ceramic Resonator, 12MHz,, CSTCV 2422 540 98456
2001 Cap, 33p, 5%, 50V, Ceramic 3198 016 33390
2002 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2003 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2004 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2005 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2006 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2007 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2008 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2010 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2011 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2012 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2013 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2016 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2017 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2019 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2020 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2022 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2023 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2024 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2025 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2033 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2034 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2035 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2036 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290

S = Safety Part Be sure to use exact replacement part.

2037 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2038 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2039 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2040 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2052 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2053 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2054 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2055 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2056 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2057 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2100 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2108 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2109 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2110 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2111 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2112 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 10n, 10%, 50V, Ceramic. 3198 017 01030
2312 Cap, 33n, 5%, 50V, Ceramic 2020 552 96659
2312 Cap, 33n, 5%, 16v, Ceramic 2222 781 11569
2340 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2342 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2351 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2356 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 3n3, 10%, 50V, Ceramic. 3198 017 33320
2361 Cap, 1p2, 21%, 50V, Ceramic. 3198 016 31280
2362 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2372 Cap, 1u, +80/-20%, 16V, Ceramic. 3198 017 21050
2373 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2374 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2375 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2376 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2377 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2378 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2384 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2388 Cap, 33n, 10%, 16V, Ceramic. 3198 017 33330
2389 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2390 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2391 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2394 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2395 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2396 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2397 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2399 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2401 Cap, 10n, 10%, 50V, Ceramic. 3198 017 31030
2404 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2405 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2413 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2418 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2420 Cap, 150p, 5%, 50V, Ceramic. 3198 016 31510
2422 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2425 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2501 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2502 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2503 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2504 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2505 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2506 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2507 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2508 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2510 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2511 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2512 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2513 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2515 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2520 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2521 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2522 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2523 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2524 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2525 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2526 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2528 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2529 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2530 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2549 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2550 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2552 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2553 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2554 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2555 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2562 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2563 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2564 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2565 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2566 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2567 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2568 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2569 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2570 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2571 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2574 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2575 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2576 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2577 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2578 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2579 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2582 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2583 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2584 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2585 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2586 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2590 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2592 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2593 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2594 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2595 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2609 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2610 Cap, 2n2, 10%, 50V, Ceramic. 3198 017 32220
2611 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2632 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2634 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2640 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2643 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2644 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2645 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2646 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2649 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2651 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2652 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2653 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2654 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2659 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2660 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2661 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2662 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2663 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2664 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2665 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2666 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2667 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2668 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2670 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2673 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2674 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2677 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2678 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2679 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2680 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2681 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2682 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2686 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2687 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2690 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2691 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2693 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2694 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2695 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2697 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2698 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2709 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2710 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2711 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2712 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2713 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2714 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2716 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2718 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2719 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2720 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2721 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2722 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2728 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2729 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2730 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2731 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2740 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2741 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2742 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2743 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2744 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2745 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2746 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2747 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2748 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2749 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2750 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2751 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2763 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2765 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2766 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2767 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2768 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2771 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2772 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2774 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2776 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2777 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2778 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2779 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2780 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2781 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2782 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2784 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2785 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2786 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2787 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2788 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2789 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2790 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2791 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2792 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2793 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2794 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2795 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2796 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2797 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2798 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2799 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2800 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2801 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2802 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2803 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2805 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2807 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2809 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2810 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2811 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2812 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2813 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2817 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2819 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2820 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2821 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2826 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2829 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2831 Cap, 68p, 5%, 50V, Ceramic 3198 016 36890
2832 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2833 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2835 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2836 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2838 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2843 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2845 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2846 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2847 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2848 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2851 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2859 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2861 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2864 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2865 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2866 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2867 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2870 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2871 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2872 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2874 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2875 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2876 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2880 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2881 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2884 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2899 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2908 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2909 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2910 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2911 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2912 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
3001 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3002 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3003 Res, 24K, 1%, 1/16W, Metalized Glass . . 2322 704 62403
3006 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3007 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3008 Res, Network, 4x220 ohm, 5%. 3198 031 12210
3009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3011 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3012 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3013 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3014 Res, 6K8, 5%, 1/16W, Metalized Glass . . 3198 021 36820
3015 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3016 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3017 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3018 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3019 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3020 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3021 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3024 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3025 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3026 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3027 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3029 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3031 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3033 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3034 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3035 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3039 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3040 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3041 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3042 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3044 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3045 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3046 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3048 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3049 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3050 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3051 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3052 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3053 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3054 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3055 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3056 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3057 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2120 108 93902
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2322 704 66201
3061 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3062 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3064 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3065 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3066 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3067 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3068 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3069 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3074 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3076 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3078 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3079 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3080 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3081 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3088 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720

S = Safety Part Be sure to use exact replacement part.

3090 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3093 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3094 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3095 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3096 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3097 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3098 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3099 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3169 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3170 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3171 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3172 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3173 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3174 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3176 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3180 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3181 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3182 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3183 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3184 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3185 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3186 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3187 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3188 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3189 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3304 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3308 Res, 470K, 5%, 1/10W, Metalized Glass. . 3198 021 54740
3324 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3329 Res, 6R8, 5%, 1/8W, Metalized Glass. . . 2322 750 66808
3330 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3332 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3335 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3355 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3360 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3370 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3371 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3372 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3376 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3377 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3378 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3382 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3385 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3387 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3393 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3395 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3396 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3397 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3398 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3400 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3401 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3402 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3403 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3404 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3405 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3408 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3415 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3418 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3419 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3420 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3436 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3437 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3439 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3441 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3444 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3446 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3447 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3448 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3449 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3456 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3457 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3463 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3467 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3470 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3471 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3473 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3500 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3501 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3504 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3505 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3506 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3509 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3510 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3511 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3512 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3513 Res, 270K, 5%, 1/16W, Metalized Glass. . 2322 702 60274
3514 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3515 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3516 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3519 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3521 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3522 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3523 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3524 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3525 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3526 Res, 1M, 5%, 1/16W, Metalized Glass. . . 3198 021 31050
3527 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3529 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3530 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3531 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3532 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3533 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3540 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3546 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3554 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3558 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3559 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3560 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3561 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3562 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3563 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3564 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3567 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3570 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3571 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3572 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3573 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3574 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3575 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3576 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3577 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3578 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3579 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3614 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3615 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3624 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3626 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3627 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3628 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3630 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3634 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3636 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3637 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3639 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3640 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3641 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3642 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3643 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3644 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3653 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3654 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3658 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3666 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3667 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3668 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3669 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3670 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3671 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3693 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3698 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3699 Res, 180K, 5%, 1/16W, Metalized Glass. . 2322 702 60184
3709 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3710 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3711 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3712 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3713 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3714 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3715 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3716 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3717 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3718 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3719 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3720 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3725 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3726 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3727 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3728 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3730 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3736 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3737 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3738 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3739 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3740 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3741 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3742 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3744 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220

S = Safety Part Be sure to use exact replacement part.

3745 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3746 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3747 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3748 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3749 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3750 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3751 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3752 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3753 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3754 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3755 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3756 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3757 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3758 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3759 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3762 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3763 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3764 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3771 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3772 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3773 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3774 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3781 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3782 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3783 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3792 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3793 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3794 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3795 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3804 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
5150 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5151 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5152 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5153 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5154 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5155 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5305 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5306 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5307 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5308 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5309 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5310 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5311 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5402 Coil, 8u2. . . . . 3198 018 38280
5404 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5405 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5406 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5408 IND VAR SM 5CCB 91MHZ PM R 2422 549 44875
5409 IND FXD 0603 EMI 100MHZ 120R R 2422 549 42893
5409 Inductor, Fixed, 100MHz, 120R 2422 549 42896
5411 Coil, 330n 3198 018 33370
5415 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5416 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5417 Coil, 33u. 3198 018 33390
5651 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5652 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5653 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5654 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5655 Coil, 22u. 3198 018 32290
5656 Coil, 6u8. . . . . 3198 018 36880
5657 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5658 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5659 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5660 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5661 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5662 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5663 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5664 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5665 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5666 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5667 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5668 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5669 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5670 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5671 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5672 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5706 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5707 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5710 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5711 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5712 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5713 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5714 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5716 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5717 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5718 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5719 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5721 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5722 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5724 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5726 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5727 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5728 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5729 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5731 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5736 Coil, 6u8. . . . . 3198 018 36880
5737 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5738 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5742 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5743 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5744 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5900 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5901 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5902 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5903 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5904 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5910 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5911 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5912 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5913 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5914 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5915 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5917 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5918 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5919 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5920 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
6001 Diode, Signal, BAT54 . . . . . 3198 010 10660
6002 Diode, Signal, BAS316. . . . . 3198 010 10630
6003 Diode, Signal, BAT54 . . . . . 3198 010 10660
6004 Diode, Signal, BAT54 . . . . . 3198 010 10660
6005 Diode, Regulator, PLVA2650A. 9340 309 70215
6320 Diode, Signal, BAS316. . . . . 3198 010 10630
6321 Diode, Signal, BAS316. . . . . 3198 010 10630
6322 Diode, Signal, BAS316. . . . . 3198 010 10630
6652 Zener Diode, 10V 3198 020 51090
6657 Zener Diode, 2.7 volt. 9340 548 43115
6658 Diode, Signal, BAS316. . . . . 3198 010 10630
6926 Zener Diode, 8.2V. 3198 020 58280
6956 Zener Diode, 8.2V. 3198 020 58280
6957 Zener Diode, 8.2V. 3198 020 58280
7001 IC, TV System Controller, QFP120, SAA5801 H/015. . . . . 9352 684 81557
7002 Transistor, NPN, BC857BW 3198 010 42320
7003 Transistor, NPN, BC847BW 3198 010 42310
7004 Transistor, NPN, BC847BW 3198 010 42310
7005 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7006 IC, CMOS Flash Memory, TC58FVM5T2ATG65 . 9322 194 83671
7007 IC, CMOS 16 Bit Dynamic RAM, MSM51V18165F 9322 157 20668
7007 IC, CMOS 16-Bit Dynamic RAM, IS41LV16100 9322 200 55668
7008 Transistor, NPN, BC847BW 3198 010 42310
7009 Transistor, NPN, BC847BW 3198 010 42310
7010 Transistor, NPN, BC857BW 3198 010 42320
7011 IC, M24C32-WMN6. . . . . 9322 124 74668
7013 Transistor, NPN, BC847BW 3198 010 42310
7014 Transistor, NPN, BC857BW 3198 010 42320
7015 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7016 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7100 IC, 3.3V Prog. LVDS Transmitter, DS90C385 9322 159 45668
7305 Transistor, NPN, BC847BW 3198 010 42310
7312 Transistor, NPN, PDTC144EU 3198 010 44330
7320 Transistor, NPN, BC847BW 3198 010 42310
7322 Transistor, NPN, BC847BW 3198 010 42310
7323 IC, IIC-Bus Controlled TV Processor. . . 9352 625 24518
7375 Transistor, NPN, BC847BW 3198 010 42310
7402 Transistor, NPN, BC847BW 3198 010 42310
7404 Transistor, NPN, BC847BW 3198 010 42310
7408 Transistor, PNP, BC857B. 3198 010 42150
7409 Transistor, PNP, BC857B. 3198 010 42150
7410 Transistor, NPN, BC847BW 3198 010 42310
7411 Transistor, NPN, BC847B. 3198 010 42030
7651 IC, Multi-standard Sound Processor, MSP34 21G. 9322 183 23671
7654 Transistor, NPN, BC847BS 9340 425 20115
7664 Transistor, NPN, BC847BPN. 9340 425 30115
7665 Transistor, NPN, BC847BPN. 9340 425 30115
7666 Transistor, NPN, BC847BPN. 9340 425 30115
7668 Transistor, NPN, BC857BW 3198 010 42320
7674 Transistor, NPN, BC847BW 3198 010 42310
7675 Transistor, NPN, BC847BS 9340 425 20115
7678 Transistor, NPN, BC847BS 9340 425 20115
7679 Transistor, NPN, BC847BS 9340 425 20115
7681 IC, LP/LN Operational Amplifier. 9322 060 73668
7682 Transistor, NPN, BC847B. 3198 010 42030
7706 IC, Digital, LF25CDT 9322 142 88668
7706 IC, Voltage Regulator w/Inhibit. 9322 164 71668
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7709 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 IC Socket, 32 Pin, V, F. 2422 486 80938
7711 IC, 512 Kbit EPOM, M27C512 . . . . . 9322 127 85668
7712 IC, Octal D-type Transparent Latch . . . 9351 870 00118

S = Safety Part Be sure to use exact replacement part.

7713 IC, PICNIC, SAA4978H 9352 688 09557
7714 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7715 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7717 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7718 IC, Field/Line Rate Converter, SAA4993H. 9352 695 58557
7719 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7722 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7723 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7724 IC, EAGLE - Video Enhancment Processor, T 8F24EF 9322 188 08702
7725 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7726 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7727 IC, Low Drop Volt. Reg. w/Inhibit, LF15AB DT. 9322 170 14668
7734 IC, Inverter, LVLP, 74LVC1G04. . . . . 3198 010 70390
7735 IC, D-type flip-flop, 74LVC1G79. . . . . 9352 686 75125
9008 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9010 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9011 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9012 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9013 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9014 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9302 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9313 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9322 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9401 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9403 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9406 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9407 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9410 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9413 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9414 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9416 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9417 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9520 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9522 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9603 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9604 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9610 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9611 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9632 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9642 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9645 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9676 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9677 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9682 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9683 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9686 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9687 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9691 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9702 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9703 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9704 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9712 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9714 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9716 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9717 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9718 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9719 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9721 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9723 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9725 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9729 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9731 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9733 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9735 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9739 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9740 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9741 Res, Network, 4x10 ohm, 5% 3198 031 11090
9744 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9754 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9760 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9761 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9763 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9764 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9768 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9769 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9901 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9902 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9903 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9904 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9905 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9906 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9907 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9908 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9909 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9919 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9920 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9921 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9925 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9927 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9928 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9929 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9935 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9937 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9938 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9939 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9944 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9945 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9946 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9947 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9948 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9949 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9950 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9951 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9952 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9953 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9954 Res, Zero ohm, 'Chip' Jumper 3198 021 90030

Scaler Board MSB Panel

Scaler Board MSB Panel
0300 Connector, 64 Pin, BM, M 2422 025 17714
0303 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0305 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0308 Phono Jack Board, 4 Plugs, Red & White . 2422 026 05422
0310 Sub-D Connector, 15 Pin, BM, F 2422 025 17027
0311 Phono Jack Board, 6 Plugs, Red , Blue, Green 2422 026 05421
0315 Connector, 5 Pin, M, IDE 2422 025 17931
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Connector, 4 Pin 2422 025 12479
1105 Connector, 10 Pin, V, M. 2422 021 98888
1106 Connector, 10 Pin, V, M. 2422 021 98888
1152 Scaler Board MSB Panel Assembly. 3122 357 22272
1300 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1301 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1302 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1303 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1401 Connector, V, 10 Pin,, F 2422 025 16729
1501 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1502 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1503 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1504 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1505 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1700 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1701 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1702 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1703 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2108 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2109 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2110 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2111 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2121 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2122 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2138 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2139 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2151 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2152 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2153 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2154 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2155 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2156 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2157 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2158 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2159 Cap, 4p7, 5%, 50V, Ceramic 3198 016 34780
2160 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2161 Cap, 100u, 20%, 6.3V, Electrolytic . . . 2020 012 93793
2170 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2171 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2172 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2173 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2174 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2175 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2176 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2177 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2178 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2179 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2180 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2181 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2182 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2183 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2184 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2185 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2186 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2187 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2188 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2189 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2190 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2191 Cap, 68n, 10%, 16V, Ceramic. 3198 017 36830
2192 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2194 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2195 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2196 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2197 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2198 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2199 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2200 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2225 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2226 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2227 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2228 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2229 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2230 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2231 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2232 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2233 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2234 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2235 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2236 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2237 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2238 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2240 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2241 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2242 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2243 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2244 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2245 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2246 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2247 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2248 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2249 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2255 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2260 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2261 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2262 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2263 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2267 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2295 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2296 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2297 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2298 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2299 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2300 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2304 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2305 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2306 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2307 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2308 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2309 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2311 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2312 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2314 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2315 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2316 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2317 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2318 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2319 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2320 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2321 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2322 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2323 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2345 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2346 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2347 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2348 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2349 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2354 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2355 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2359 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2360 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2361 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2362 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2363 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2364 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2372 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2373 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2374 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2375 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2377 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2378 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2379 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2380 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2381 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2382 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2383 Cap, 3n9, 10%, 50V, Ceramic. 2020 552 96428
2384 Cap, 39n, 10%, 50V, Ceramic. 2238 580 15644
2385 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2386 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2405 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2406 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2408 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2409 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2413 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2414 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2415 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2416 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2417 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2418 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2419 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2420 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2421 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2423 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2431 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2432 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2433 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2434 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2435 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2437 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2438 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2439 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2440 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2441 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2443 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2444 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2445 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2446 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2447 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2448 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2492 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2493 Cap, 1u, +80/-20%, 10V, Ceramic. 3198 017 41050
2494 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2495 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2497 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2502 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2535 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2536 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2538 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2539 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2540 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2541 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2542 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2543 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2550 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2582 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2583 Cap, 270p, 5%, 50V, Ceramic. 3198 016 32710
2584 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2585 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2586 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2587 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2588 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2590 Cap, 470p, 2%, 50V, Ceramic. 2238 867 14471
2593 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2594 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2595 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2596 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2598 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2599 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2600 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2633 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290

S = Safety Part Be sure to use exact replacement part.

2634 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2635 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2659 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2660 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2664 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2665 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2666 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2667 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2669 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2670 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2671 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2672 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2710 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2712 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2713 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2714 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2715 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2716 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2718 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2720 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2722 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2724 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2725 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2726 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2727 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2730 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2736 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2737 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2759 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2766 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2767 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2771 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2772 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2780 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2781 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2790 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2820 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2821 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 1n5, 10%, 50V, Ceramic. 3198 017 31520
2826 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2827 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2830 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2831 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2832 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2833 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2850 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2851 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2852 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2855 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2856 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2861 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2862 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2863 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2870 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2871 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2882 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2883 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2886 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2888 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2897 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
3106 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3107 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3108 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3109 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3110 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3111 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3112 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3113 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3114 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3115 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3116 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3120 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3121 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3122 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3123 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3124 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3134 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3135 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3137 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3138 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3139 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3151 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3152 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3153 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3156 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3157 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3158 Res, 75 ohm, 5%, 1/16W, Metalized Glass. 3198 021 37590
3173 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3175 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3176 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3180 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3181 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3182 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3183 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3184 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3185 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3186 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3187 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3188 Res, 68 ohm, 5%, 1/16W, Metalized Glass. 3198 021 36890
3198 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3220 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3221 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3260 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3261 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3262 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3263 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3264 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3265 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3266 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3302 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3303 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3304 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3306 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3345 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3346 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3347 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3348 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3349 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3350 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3351 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3352 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3405 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3406 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3407 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3408 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3409 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3410 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3411 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3413 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3414 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3415 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3416 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3420 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3422 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3423 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3425 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3426 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3427 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3428 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3434 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3435 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3436 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3437 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3438 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3440 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3441 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3444 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3445 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3447 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3448 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3449 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3450 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3451 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3452 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3455 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3456 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3484 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040

S = Safety Part Be sure to use exact replacement part.

3485 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3486 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3487 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3488 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3489 Res, 4R7, 5%, 1/16W, Metalized Glass . . 3198 021 34780
3490 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3492 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3497 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3498 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3499 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3500 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3505 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3506 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3507 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3508 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3511 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3512 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3535 Res, Network, 4x47 ohm, 5% 3198 031 14790
3536 Res, Network, 4x47 ohm, 5% 3198 031 14790
3537 Res, Network, 4x47 ohm, 5% 3198 031 14790
3538 Res, Network, 4x47 ohm, 5% 3198 031 14790
3539 Res, Network, 4x47 ohm, 5% 3198 031 14790
3540 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3541 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3542 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3543 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3544 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3581 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3582 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3583 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3584 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3585 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3586 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3587 Res, 47K, 1%, 1/16W, Metalized Glass . . 2322 704 64703
3588 Res, 330K, 5%, 1/16W, Metalized Glass. . 3198 021 33340
3589 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3590 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3591 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3593 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3595 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3597 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3598 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3599 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3603 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3604 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3605 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3606 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3630 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3631 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3633 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3634 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3635 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3636 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3649 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3651 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3653 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3654 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3666 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3667 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3668 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3669 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3670 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3673 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3674 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3675 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3676 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3677 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3710 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3711 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3713 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3714 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3715 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3716 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3717 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3718 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3720 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3721 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3722 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3725 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3726 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3727 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3730 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3731 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3732 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3733 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3745 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3746 Res, Network, 4x47 ohm, 5% 3198 031 14790
3747 Res, Network, 4x47 ohm, 5% 3198 031 14790
3748 Res, Network, 4x47 ohm, 5% 3198 031 14790
3749 Res, Network, 4x47 ohm, 5% 3198 031 14790
3750 Res, Network, 4x47 ohm, 5% 3198 031 14790
3751 Res, Network, 4x47 ohm, 5% 3198 031 14790
3752 Res, Network, 4x47 ohm, 5% 3198 031 14790
3753 Res, Network, 4x47 ohm, 5% 3198 031 14790
3754 Res, Network, 4x47 ohm, 5% 3198 031 14790
3755 Res, Network, 4x47 ohm, 5% 3198 031 14790
3756 Res, Network, 4x47 ohm, 5% 3198 031 14790
3757 Res, Network, 4x47 ohm, 5% 3198 031 14790
3758 Res, Network, 4x47 ohm, 5% 3198 031 14790
3760 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3761 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3767 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3768 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3769 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3770 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3777 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3779 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3781 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3782 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3790 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3792 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3797 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3798 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3799 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3801 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3820 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3821 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3826 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3828 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3829 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3830 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3831 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3832 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3850 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3851 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3856 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3858 Res, 1K5, 1%, 1/16W, Metalized Glass . . 2322 704 61502
3860 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3861 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3862 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3870 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3871 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3872 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3873 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3999 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
4105 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4106 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4110 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4111 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4267 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4349 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4485 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4650 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4778 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4780 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4793 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4890 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
4891 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4892 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5107 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5160 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5164 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5165 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5166 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5170 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5195 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5225 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5240 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5255 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5260 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5295 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5296 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5297 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5345 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5346 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5347 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5348 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5405 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5406 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5408 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5411 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5486 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5488 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5535 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5536 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5539 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5581 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769

S = Safety Part Be sure to use exact replacement part.

5582 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5583 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5584 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5585 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5633 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5710 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5711 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5712 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5715 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5724 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5746 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5747 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5749 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5751 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5780 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5830 Coil, 22u. 2422 535 95278
5860 Coil, 22u. 2422 535 95278
5890 Coil, 22u. 2422 535 95278
5892 Coil, 22u. 2422 535 95278
6220 Diode, Signal, BAV99 . . . . . 3198 010 10620
6221 Diode, Signal, BAV99 . . . . . 3198 010 10620
6405 Diode, Signal, BAT54 . . . . . 3198 010 10660
6485 Diode, Signal, BAT54 . . . . . 3198 010 10660
6581 Diode, Signal, BAS316. . . . . 3198 010 10630
6630 Zener Diode, 6.8V. 3198 020 56880
6631 Zener Diode, 6.8V. 3198 020 56880
6632 Zener Diode, 6.8V. 3198 020 56880
6633 Zener Diode, 33V 3198 020 53390
6634 Zener Diode, 33V 3198 020 53390
6635 Zener Diode, 33V 3198 020 53390
6636 Zener Diode, 33V 3198 020 53390
6637 Zener Diode, 6.8V. 3198 020 56880
6638 Zener Diode, 6.8V. 3198 020 56880
6639 Zener Diode, 6.8V. 3198 020 56880
6640 Zener Diode, 6.8V. 3198 020 56880
6641 Zener Diode, 6.8V. 3198 020 56880
6642 Zener Diode, 6.8V. 3198 020 56880
6643 Zener Diode, 6.8V. 3198 020 56880
6710 Zener Diode, 6.8V. 3198 020 56880
6711 Zener Diode, 6.8V. 3198 020 56880
6712 Zener Diode, 6.8V. 3198 020 56880
6745 Diode, Signal, BAV99 . . . . . 3198 010 10620
6746 Diode, Signal, BAV99 . . . . . 3198 010 10620
6747 Diode, Signal, BAV99 . . . . . 3198 010 10620
6748 Diode, Signal, BAV99 . . . . . 3198 010 10620
6749 Diode, Signal, BAV99 . . . . . 3198 010 10620
6750 Diode, Signal, BAV99 . . . . . 3198 010 10620
6751 Zener Diode, 6.8V. 3198 020 56880
6752 Zener Diode, 6.8V. 3198 020 56880
6753 Diode, Signal, BAV99 . . . . . 3198 010 10620
6754 Diode, Signal, BAV99 . . . . . 3198 010 10620
6755 Diode, Signal, BAS316. . . . . 3198 010 10630
6756 Diode, Signal, BAS316. . . . . 3198 010 10630
6757 Zener Diode, 33V 3198 020 53390
6758 Zener Diode, 33V 3198 020 53390
6759 Zener Diode, 33V 3198 020 53390
6760 Zener Diode, 33V 3198 020 53390
6761 Zener Diode, 6.8V. 3198 020 56880
6820 Diode, Signal, BAS316. . . . . 3198 010 10630
6830 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
6850 Diode, Signal, BAS316. . . . . 3198 010 10630
6860 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
7107 IC, 2 Ch. IIC Multiplexer, PCA9540 . . . 9352 666 74118
7120 IC, Prog. Gate Array, EP1C6Q240C8. . . . 9322 196 44671
7137 IC, Volt Det. w/Prog. Delay, NCP303LS09. 9322 186 29685
7160 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7170 IC, 140 MSPS Analog Interface, AD9883A . 9322 181 72671
7195 IC, 100 MSPS, 3V A/D Converter, AD9283 . 9322 197 13668
7255 IC, Serial Conf. Flash Memory, 1Mbit, EPCS1. . . . . 9322 196 51682
7260 IC, Serial Conf. f/APEX & FLEX Dev., EPC2 9322 141 53682
7295 IC, Digital Transmitter, SII160CT100 . . 9322 171 04671
7345 IC, 205 MSPS Analog FP Interface, AD9888 9322 179 30671
7346 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7347 IC, Quad Buffer/Driver, 74LVC125AD . . . 9352 317 00118
7405 IC, M24C32-WMN6. . . . . 9322 124 74668
7406 IC, 64k x 16-bit Static RAM, CY62126BV . 9322 164 75682
7407 IC, PW181 Image Processor, PW181-10Q . . 9322 184 01671
7409 IC, 16Mbit, 3V Flash Memory, M29W160ET . 9322 194 74668
7411 Crystal Oscillator, 14.31818MHz, FXO-34FL 2722 171 08787
7484 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7486 Transistor, NPN, BC847BW 3198 010 42310
7487 Transistor, NPN, BC847BW 3198 010 42310
7490 Transistor, NPN, BC847BW 3198 010 42310
7491 Transistor, NPN, BC847BW 3198 010 42310
7494 IC, Prog. Shunt Volt. Ref., TS431. . . . 9322 192 16685
7537 IC, LVDS Receiver to 24bit Conv., DS90CF386. . . . . 9322 164 41668
7581 IC, Dual Retrig. Mono Multivibrator, 74HCT4538. . . . . 9337 153 90118
7582 Transistor, NPN, BC847BW 3198 010 42310
7583 IC, Video Sync Separator, LM188. . . . . 9322 005 78668
7589 IC, Triple 2 Ch. Analog Multiplex/Demultiplexer 9337 153 20118
7592 IC, Ultra Fast Comparator, TL3016. . . . 9322 125 63668
7593 IC, Hex Inverting Schmitt-trigger, 74LVC14A. 9352 607 39118
7594 Transistor, NPN, BC847BW 3198 010 42310
7633 IC, Serial EEPROM. 9322 046 99668
7710 IC, Wide Band Analog Switch, M52758FP. . 9322 185 90668
7715 Transistor, NPN, BC847BW 3198 010 42310
7716 Transistor, NPN, BC847BW 3198 010 42310
7717 Transistor, NPN, BC847BW 3198 010 42310
7725 Transistor, NPN, BC847BW 3198 010 42310
7746 IC, HDCP PanelLink Receiver, SII169CT100 9322 185 79668
7747 IC, Serial EEPROM. 9322 046 99668
7749 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7750 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7820 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7830 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7850 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7860 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7870 IC, Adj. Pos. Volt. Reg., LD1117DT . . . 9322 144 97668

Cabinet & Accessory Parts

0005 System Cooling Fan Assembly. 3135 037 71361
0009 Cable, Thermal Sw. 2 Pin, 600mm. 3135 038 70071
0010 Roller Switch, f/Light Engine Lamp Door. 3135 038 40011
0016 Lamp, Light Engine 3122 438 71310
0017 Light Engine Asm., 1.18" D62 XION 1.05 . 3122 437 11491
0018 Bracket, Light Engine. 3135 034 01923
0019 Screen, Lenticular, LCoS 62W 3135 033 20541
0020 Screen, Fresnel, LCoS 62W. 3135 033 20531
0021 Mirror, 62 LCOS. 3135 034 90181
0023 Shield, Light, 62W 3135 034 04252
0024 Stud, Adjusting, f/Light Engine (3 used) 3135 030 40281
0025 Bracket, Adjust. 3135 031 10021
0030 Cabinet Front Asm., LCoS, 62W. 3135 037 54621
0032 Cabinet Top, 62W 3135 037 54701
0034 Upper Backcover, 62W 3135 037 54641
0036 Lower Backcover, 62W 3135 037 54661
0038 Cabinet Base, 62W. 3135 034 04391
0039 Baffle, Speaker. 3135 037 54681
0065 Philips Wordmark 3135 030 00391
0066 Overlay f/Control Housing. 3135 030 00421
0067 Label, Rear Jack Panel 3135 037 54291
0071 Label, Rear Center Channel Sw. 3135 030 00361
0075 Vertical Rail, Left Side, LCoS 62W . . . 3135 031 20551
0076 Vertical Rail, Right Side, LCoS 62W. . . 3135 031 20561
0077 Rail, Screen, Horizontal, LCoS 62W (2 used). 3135 031 20572
0081 Frame f/Mirror 62W 3135 034 04231
0088 Bracket f/Back Support 62W LCoS (2 used) 3135 031 20541
0090 Bracket Left, Cabinet Support. 3135 031 20274
0091 Bracket Right, Cabinet Support 3135 031 20264
0092 Rail Support Bracket, LCoS 62W 3135 031 20582
0093 Support Bracket, Back, 62W LCoS. 3135 031 20601
0096 Door, Lamp Access. 3135 034 04271
0098 Filter Assembly. 3135 037 51811
0106 Rail, System Asm. Left 3135 031 20332
0107 Rail, System Asm. Right. 3135 031 20342
0124 Frame f/Control Housing. 3135 037 54261
0127 Frame, f/Side Jack Panel 3135 037 51615
0132 Frame, f/LED Sensor Panel. 3135 034 01872
0167 Documentation, Quick Use Guide, English. 3135 035 22913
0168 Documentation, Owner's Manual, English . 3135 035 22903
0193 Option Code Label, LCoS 2004 . . . . . 3135 035 23211
0323 Washer, Flat, f/Light Eng. Adj. Studs (6 used). 3135 030 40171
0324 Nut, M5, f/Light Eng. Adj. Studs (3 used) 3135 030 40181
1085 Remote Transmitter, RC4336/01. . . . . 3139 238 07841
5213 Speaker, 8 ohm, 25W, Woofer (2 used). . 2422 264 00504
S 8190 Mainscord, USA, 7A, 2M4, VH BK 2422 070 98164
8610 Cable, DVI-D/450/DVI-D 3135 031 02121

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7665

First Publish: 08-10-2004
Rev. Date: 08-10-2004
Print Date: 2004-08-10

Return to Index

PARTS LIST
62PL9774

Lamp Driver Panel Parts

3D Comb Filter Panel Parts
Main Power Panel Parts
Rear Jack Panel Parts
System Panel Parts
LED Sensor Panel Parts
Side Jack Panel Parts
LED/Keyboard Panel Parts
Thermal Sensor Panel Parts
Input Power Panel Parts
Audio Amp Panel Parts
DW PIP Panel Parts
SSB Panel Parts
Scaler Board MSB Panel Parts
Cabinet & Accessory Parts

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

LAMP DRIVER PANEL

LAMP DRIVER PANEL
LAMP DRIVER PANEL. 9137 001 77405

3D Comb Filter Panel Parts

3D Comb Filter Panel Parts

1153	3D Comb Panel Asm.	3135 037 10261
0001	Shield, Bottom	3135 031 20101
0002	Shield, Top.	3135 031 20092
1001	Resonator, Crystal, 20MHz	2422 543 01273
1008	Connector, 9 Pin	2422 025 17802
1009	Connector, 9 Pin	2422 025 17802
2000	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2001	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2002	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2003	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2004	Cap, 100u, 20%, 16v, Electrolytic.	3198 030 41010
2005	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2006	Cap, 47u, 20%, 20v, Electrolytic	3198 032 58170
2008	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2009	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2010	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2011	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2012	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2013	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2014	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2015	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2016	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2017	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2018	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2019	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2020	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2021	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2022	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2023	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2024	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2026	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2027	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2028	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2029	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2030	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2031	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2032	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2033	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2034	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2035	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2036	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080
2037	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2041	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2042	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2043	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2044	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2045	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2046	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2047	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2048	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2049	Cap, 47u, 20%, 16v, Electrolytic	3198 030 44790
2051	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2052	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2053	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2054	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2055	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2056	Cap, 10u, 20%, 20v, Electrolytic	3198 032 55130
2057	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2059	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2061	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2062	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2063	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2064	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2065	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2066	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2067	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2068	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2069	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
2070	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290
3000	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3001	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3002	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3003	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3004	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3005	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3006	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3007	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3008	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3009	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3010	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3011	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3012	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3013	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3014	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3015	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3016	Res, 33 ohm, 5%, 1/16W, Metalized Glass.	3198 021 33390
3017	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3018	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3019	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3020	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3021	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3022	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3023	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198 021 31210
3024	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3025	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3026	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3027	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3028	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3029	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3030	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3031	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3032	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3033	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3034	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3035	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3036	Res, 270 ohm, 5%, 1/16W, Metalized Glass	3198 021 32710
3037	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3038	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3039	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3040	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3041	Res, 820 ohm, 5%, 1/16W, Metalized Glass	3198 021 38210
3042	Res, 3K3, 1%, 1/16W, Metalized Glass	2322 704 73302
3043	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3044	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3055	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3056	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3057	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3058	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
3059	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730
3060	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3061	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3065	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
3067	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3068	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3069	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3071	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3072	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3073	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3074	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198 021 33310
3076	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3077	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210
3082	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3083	Res, 47 ohm, 5%, 1/16W, Metalized Glass.	3198 021 34790
3085	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3088	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3089	Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3091	Res, 10 ohm, 5%, 1/16W, Metalized Glass.	3198 021 31090
3095	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3096	Res, 180 ohm, 5%, 1/16W, Metalized Glass	3198 021 31810
3097	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3098	Res, 5K6, 5%, 1/16W, Metalized Glass	3198 021 35620
3099	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3100	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3101	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3102	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198 021 31010
3103	PTC, 6V, 1R3	2122 662 00139
3104	PTC, 6V, 1R3	2122 662 00139
3105	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
5000	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5001	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5003	Filter, Fixed, 14M3.	2422 549 44784
5004	Filter, Fixed, 14M3.	2422 549 44784
5005	Coil, 10u.	3198 018 41090
5006	Filter, Fixed, 14M3.	2422 549 44785
5007	Coil, 10u.	3198 018 41090
5008	Coil, 22u.	3198 018 72290
5009	Coil, 22u.	3198 018 72290
5010	Coil, 15u.	2422 535 94758
5011	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5012	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5013	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5014	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5015	Inductor, Fixed, 100MHz, 30 ohm.	3198 018 90060
5017	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5019	Coil, 10u.	3198 018 41090
5020	Coil, 10u.	3198 018 41090
5021	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5022	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5024	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5025	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5027	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5028	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5029	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
5030	Inductor, Fixed, 100Mhz, 120 ohm	3198 018 90070
6000	Diode, Signal, BAV99	3198 010 10620
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	LED, VS, TLMH3100.	9322 072 71685

S = Safety Part Be sure to use exact replacement part.

6004	Diode, Rect, S1D.	9322 128 69685	
6005	Diode, Rect, S1D.	9322 128 69685	
6006	Diode, Signal, 1PS76SB10	9340 453 90115	
6007	Diode, Signal, BAS17	9335 262 30215	
7000	Transistor, NPN, BC847B.	9335 895 90215	
7001	Transistor, PNP, BC857B.	9335 897 60215	
7002	Transistor, NPN, BF570	9338 144 20215	
7003	Transistor, PNP, BC857B.	9335 897 60215	
7004	Transistor, NPN, BC847B.	9335 895 90215	
7005	Transistor, PNP, BC857B.	9335 897 60215	
7006	Transistor, NPN, BF570	9338 144 20215	
7007	Transistor, PNP, BC857B.	9335 897 60215	
7008	Transistor, NPN, BC847B.	9335 895 90215	
7009	Transistor, PNP, BC857B.	9335 897 60215	
7010	Transistor, NPN, BC847B.	9335 895 90215	
7011	Transistor, NPN, BC847B.	9335 895 90215	
7012	Transistor, PNP, BF550	9334 509 00215	
7015	Transistor, NPN, BC847B.	9335 895 90215	
7016	Transistor, PNP, BC857B.	9335 897 60215	
7017	Transistor, NPN, BC847B.	9335 895 90215	
7019	IC, LM809M3-3.08	9322 163 48668	
7020	Transistor, NPN, BC847B.	9335 895 90215	
7021	IC, LD1117DT33	9322 134 45668	
7022	IC, LD1117DT25	9322 160 50668	
7023	IC, UPD64083GF	9322 170 65671	

Main Power Panel Parts

Main Power Panel Parts

0218	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0219	Clip, Transistor	3135 011 02681	
0220	Spring Clip.	3139 121 24583	
0221	Spring Clip.	3139 121 24583	
0300	Insulator, SP900, 19.0x27.9x0.23	3135 010 02331	
0301	Clip, Transistor	3135 011 02681	
0302	Spring Clip.	3139 121 24583	
0305	Spring Clip.	3139 121 24583	
0306	Spring Clip.	3139 121 24583	
1206	Connector, 1 Pin	2422 015 18552	
1218	Heatsink	3135 031 60071	
1219	Heatsink, Dual TO-220.	3135 031 60133	
1300	Heatsink	3135 031 60071	
1302	Heatsink, Dual TO-220.	3135 031 60133	
1305	Heatsink, Dual TO-220.	3135 031 60133	
1311	Connector, 6 Pin, BM, V, M	2422 025 14044	
1312	Connector, 7 Pin	2422 025 11244	
1313	Connector, 8 Pin, BM, V, M	2422 025 10648	
1314	Connector, 9 Pin, BM, V, M	2422 025 12827	
1315	Connector, 10 Pin, BM, V, M.	2422 025 15085	
2220	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2221	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2222	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2223	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2226	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2227	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2233	Cap, 330p, 10%, 1KV, Ceramic	3198 019 63310	
2235	Cap, 1n, 10%, 1KV, Ceramic	3198 019 51020	
2236	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2237	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2238	Cap, 3300u, 20%, 16V, Electrolytic	2020 021 91816	
2239	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2240	Cap, 1000u, 20%, 16V, Electrolytic	2020 021 91803	
2241	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2243	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2244	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2245	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2246	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2247	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2265	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2310	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2312	Cap, 1n, 10%, 1KV, Ceramic	2020 558 90557	
2320	Cap, 100u, 20%, 400V, Electrolytic	2020 021 91759	
S 2321	Cap, 470p, 10%, 250V, Ceramic.	2020 554 90169	
2323	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2333	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2335	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010	
2336	Cap, 4n7, 10%, 400V, Metalized Polyester	2222 365 55472	
2337	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2338	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2339	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2340	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2341	Cap, 10u, 20%, 50V, Electrolytic	2020 021 91808	
2342	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2343	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2344	Cap, 47u, 20%, 16V, Electrolytic	2020 021 91804	
2345	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2346	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2347	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2348	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2349	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2350	Cap, 4n7, 10%, 50V, Ceramic.	3198 019 14720	
2351	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2352	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2353	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
2354	Cap, 22u, 20%, 100V, Electrolytic.	2020 021 91813	
2355	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2356	Cap, 100p, 10%, 500V, Ceramic.	3198 019 41010	
2357	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2358	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2360	Cap, 1500u, 20%, 25V, Electrolytic	2020 021 91806	
2361	Cap, 1000u, 20%, 25V, Electrolytic	2020 021 91805	
2362	Cap, 470p, 10%, 1KV, Ceramic	3198 019 54710	
2363	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2364	Cap, 470u, 20%, 50V, Electrolytic.	2020 021 91809	
2365	Cap, 1u, 20%, 100V, Electrolytic	2020 021 91812	
2366	Cap, 1000u, 20%, 10V, Electrolytic	2020 021 91814	
2367	Cap, 22u, 20%, 35V, Electrolytic	2020 021 91811	
3221	Res, 33K, 5%, 1W, Metal Film	3198 012 13330	
3222	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3223	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3224	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3226	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3227	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3228	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3229	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790	
3230	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3231	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3233	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198 011 01080	
3237	Res, 10K7, 1%, 3/5W, Metal Film.	2312 915 11073	
3238	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3252	Res, 22 ohm, 1%, 3/5W, Metal Film.	2312 915 12209	
3253	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3254	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	
3255	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	
3256	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3257	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3259	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3260	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	
3321	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
3322	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3323	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3324	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3325	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105 93418	
3326	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3327	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3328	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	
3329	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	
3330	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	
3331	Res, 270 ohm, 5%, 1/10W, Metalized Glass	3198 021 52710	
3332	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630	
3333	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	
3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3335	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3338	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3339	Res, 1K, 5%, 1 1/3W, Metal Film.	3198 012 21020	
3340	Res, 22K, 5%, 1W, Metal Film	3198 012 12230	
S 3341	Res, 680 ohm, 5%, 3W, Metal Film	3198 012 36810	
3342	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3343	Res, 1K8, 1%, 1/10W, Metalized Glass	2120 108 92618	
3344	Res, 750K, 1%, 3/5W, Metal Film.	2312 915 17504	
3345	Res, 27K, 1%, 1/8W, Metalized Glass.	2322 734 62703	
3346	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3347	Res, 10 ohm, 5%, 1W, Metal Film.	3198 012 11090	
3348	Res, 100 ohm, 5%, 2W, Metal Film	2120 105 93422	
3349	Res, 0R47, 5%, 3/5W, Metal Film.	3198 012 14770	
3350	Res, 8R2, 5%, 1/4W, Carbon Film.	2120 101 74828	
3351	Res, 0R1, 5%, 1 1/3W, Metal Film	3198 012 21070	
3352	Res, 2K7, 1%, 3/5W, Metal Film	2312 915 12702	
3353	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040	
3354	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3355	Res, 150K, 5%, 1/6W, Carbon Film	3198 011 01540	
3356	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3357	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3358	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3359	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	
S 5201	Line Filter, 100uH, 2.2A	2422 549 44101	
5208	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5209	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5210	Switching Transformer, US28207-00.	2422 531 02555	
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5213	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5215	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5216	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5217	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5301	Line Filter, 100uH, 2.2A	2422 549 44101	
5305	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5306	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5307	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5308	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5309	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
S 5310	Switching Transformer, US28212-02.	2422 531 02594	
5315	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	

S = Safety Part Be sure to use exact replacement part.

5316	Coil, 10u.	2422 535 94639
5317	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5318	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5319	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5320	Coil, 10u.	2422 535 94639
5321	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5322	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5323	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5324	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5325	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5326	Coil, 10u.	2422 535 95363
5327	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5328	Coil, 330u	2422 535 94863
6201	Diode, Rect, BY229X-800	9340 380 30127
6202	Zener Diode, 5.1 volt.	3198 010 55180
6202	Zener Diode, 5.1 volt.	3198 010 55180
6204	Diode, Rect., PBYR10100X.	9340 555 24127
6205	Diode, Rect, BYV95C	9335 001 80133
S 6207	IC, Optocoupler.	9338 941 50682
6209	Diode, Signal, BAV21	3198 010 10070
6301	Diode, Rect, BY229X-800	9340 380 30127
6305	Diode, Rect, BYV95C	9335 001 80133
6306	Diode, Signal, BAV21	3198 010 10070
S 6307	IC, Optocoupler.	9338 941 50682
6308	Zener Diode, 5.1 volt.	3198 010 55180
6309	Diode, Signal, BAV21	3198 010 10070
6312	Diode, Rect, SB360L-7024	9322 161 78682
6313	Diode, Rect, BYV95C	9335 001 80133
6314	Diode, Rect, BYW29EX-200.	9340 412 80127
6315	Diode, Rect., PBYR10100X.	9340 555 24127
6316	Diode, Rect, BYW95C-24.	9340 559 53112
7202	IC, PWM Off-line Switcher.	9322 166 44687
7203	Transistor, N Ch. FET, 2SK2886	9322 199 01687
7206	IC, Prog. Ref. Regulator	9322 115 98676
7209	IC, Prog. Ref. Regulator	9322 115 98676
7210	Transistor, PNP, BC557B.	3198 020 40110
7211	Transistor, NPN, BC547B.	3198 020 40030
7302	IC, PWM Off-line Switcher, TOP247Y	9322 181 88687
7303	Transistor, N Ch. FET, 2SK2886	9322 199 01687
7304	IC, Prog. Ref. Regulator	9322 115 98676
7306	IC, Prog. Ref. Regulator	9322 115 98676
7307	IC, Inverting Step Switch Reg., MC34063A	9322 036 71682
7308	Transistor, P Ch. FET, 2SJ334.	9322 199 02687
7309	IC, Prog. Ref. Regulator	9322 115 98676
7310	Transistor, PNP, BC557B.	3198 020 40110
9001	Wire Jumper, 0.58MM.	3198 036 90010
9003	Wire Jumper, 0.58MM.	3198 036 90010
9005	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010
9016	Wire Jumper, 0.58MM.	3198 036 90010
9017	Wire Jumper, 0.58MM.	3198 036 90010
9018	Wire Jumper, 0.58MM.	3198 036 90010
9019	Wire Jumper, 0.58MM.	3198 036 90010
9020	Wire Jumper, 0.58MM.	3198 036 90010
9024	Wire Jumper, 0.58MM.	3198 036 90010
9025	Wire Jumper, 0.58MM.	3198 036 90010
9026	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010
9030	Wire Jumper, 0.58MM.	3198 036 90010
9031	Wire Jumper, 0.58MM.	3198 036 90010
9032	Wire Jumper, 0.58MM.	3198 036 90010
9033	Wire Jumper, 0.58MM.	3198 036 90010
9317	Wire Jumper, 0.58MM.	3198 036 90010
9318	Wire Jumper, 0.58MM.	3198 036 90010
1010	Main Power Supply Panel Asm.	3135 037 10663

Rear Jack Panel Parts

Rear Jack Panel Parts

1016	Rear Jack Panel Asm.	3135 037 10692
1200	Connector, 4 Pin	2422 025 12479
1201	Connector, 4 Pin	2422 025 12479
1202	Connector, 4 Pin	2422 025 12479
1203	Connector, 4 Pin	2422 025 12479
1205	Connector, 3 Pin	2422 025 09191
1207	Connector, 5 Pin	2422 025 12481
1208	Connector, 5 Pin	2422 025 12481
1214	Socket, Cinch, 4 Pin	2422 026 05093
1217	Socket, Cinch, 1 Pin	2422 026 04378
1218	Socket, MDIN, 10 Pin	2422 026 04926
1219	Socket, MDIN, 10 Pin	2422 026 04926
1220	Connector, 64 Pin.	2422 025 17714
1251	Socket, Cinch, 12 Pin.	2422 026 05106
2111	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2112	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2113	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2114	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2115	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2116	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2117	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2118	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2119	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2120	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
2121	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2122	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2123	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2124	Cap, 10u, 20%, 50v, Electrolytic	3198 029 51090
2149	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740
2150	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2151	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2152	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2153	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2154	Cap, 100n, +80/-20%, 50v, Ceramic.	2020 552 95499
2155	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2156	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2157	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2158	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2159	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2160	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2161	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2162	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2163	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2164	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2165	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2166	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2167	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2168	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2169	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2170	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2171	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2173	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2174	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2175	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2176	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2177	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2178	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
2180	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2182	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2183	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2184	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2185	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2186	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2187	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2188	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2189	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
3117	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3118	Res, 30K, 1%, 1/8W, Metalized Glass.	2322 734 63003
3119	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3120	Res, 51K, 1%, 1/8W, Metalized Glass.	2322 734 65103
3121	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3122	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3125	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3128	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3129	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3130	Res, 1 ohm, 5%, 1/10W, Metalized Glass	3198 021 51080
3131	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3133	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3134	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3136	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3137	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3139	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3140	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3141	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3142	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3143	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
3144	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3145	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3146	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3155	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3156	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3157	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3158	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3159	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3160	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3161	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3162	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3173	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011 01220
3174	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3175	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3176	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3181	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3182	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3183	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3184	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3185	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3186	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3187	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

3188 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3189 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3190 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3191 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3192 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3193 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3220 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3221 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3222 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3223 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3224 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3225 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3226 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3227 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3228 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3229 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3230 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3231 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3232 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3233 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3234 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3235 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3237 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3238 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3243 Res, 68 ohm, 5%, 1/10W, Metalized Glass. 3198 021 56890
3244 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3245 Res, 150 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01510
3246 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3247 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3248 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
4000 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4001 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4004 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4005 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4006 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4007 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4008 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4009 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4010 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4011 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4012 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4013 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4014 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4015 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4016 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4017 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4018 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4019 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4020 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4021 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4022 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4023 Res, Zero ohm, "Chip" Jumper 3198 021 90020
6101 Zener Diode, 6.8 volt. 3198 020 56880
6102 Zener Diode, 6.8 volt. 3198 020 56880
6103 Zener Diode, 6.8 volt. 3198 020 56880
6104 Zener Diode, 6.8 volt. 3198 020 56880
6105 Zener Diode, 6.8 volt. 3198 020 56880
6106 Zener Diode, 6.8 volt. 3198 020 56880
6107 Zener Diode, 6.8 volt. 3198 020 56880
6108 Zener Diode, 6.8 volt. 3198 020 56880
6109 Zener Diode, 6.8 volt. 3198 020 56880
6110 Zener Diode, 6.8 volt. 3198 020 56880
6111 Zener Diode, 6.8 volt. 3198 020 56880
6112 Zener Diode, 6.8 volt. 3198 020 56880
6113 Zener Diode, 6.8 volt. 3198 020 56880
6114 Zener Diode, 6.8 volt. 3198 020 56880
6115 Zener Diode, 6.8 volt. 3198 020 56880
6116 Zener Diode, 6.8 volt. 3198 020 56880
6117 Zener Diode, 6.8 volt. 3198 020 56880
6118 Zener Diode, 6.8 volt. 3198 020 56880
6119 Zener Diode, 6.8 volt. 3198 020 56880
6120 Zener Diode, 6.8 volt. 3198 020 56880
6121 Diode, Signal, BAV99 . . . . . 9332 153 70215
6122 Diode, Signal, BAV99 . . . . . 9332 153 70215
6123 Diode, Signal, BAV99 . . . . . 9332 153 70215
6124 Diode, Signal, BAV99 . . . . . 9332 153 70215
6125 Diode, Signal, BAV99 . . . . . 9332 153 70215
6126 Diode, Signal, BAV99 . . . . . 9332 153 70215
6128 Diode, Signal, BAV99 . . . . . 9332 153 70215
6129 Diode, Signal, BAV99 . . . . . 9332 153 70215
6130 Diode, Signal, BAV99 . . . . . 9332 153 70215
6132 Diode, Signal, BAV99 . . . . . 9332 153 70215
6161 Zener Diode, 6.8 volt. 3198 020 56880
6162 Zener Diode, 6.8 volt. 3198 020 56880
7100 IC, CXA2089S 9322 162 27682
7102 Transistor, NPN, BC847B. 3198 010 42030
7105 Transistor, NPN, BC847B. 3198 010 42030
7107 Transistor, NPN, BC847B. 3198 010 42030
7108 Transistor, NPN, BC847B. 3198 010 42030
7109 Transistor, NPN, BC847B. 3198 010 42030
7110 Transistor, NPN, BC847B. 3198 010 42030
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010
9003 Wire Jumper, 0.58MM. 3198 036 90010
9004 Wire Jumper, 0.58MM. 3198 036 90010
9005 Wire Jumper, 0.58MM. 3198 036 90010
9006 Wire Jumper, 0.58MM. 3198 036 90010
9007 Wire Jumper, 0.58MM. 3198 036 90010
9008 Wire Jumper, 0.58MM. 3198 036 90010
9009 Wire Jumper, 0.58MM. 3198 036 90010
9010 Wire Jumper, 0.58MM. 3198 036 90010
9100 Wire Jumper, 0.58MM. 3198 036 90010
9101 Wire Jumper, 0.58MM. 3198 036 90010
9102 Wire Jumper, 0.58MM. 3198 036 90010
9103 Wire Jumper, 0.58MM. 3198 036 90010
9104 Wire Jumper, 0.58MM. 3198 036 90010
9105 Wire Jumper, 0.58MM. 3198 036 90010
9106 Wire Jumper, 0.58MM. 3198 036 90010
9107 Wire Jumper, 0.58MM. 3198 036 90010
9108 Wire Jumper, 0.58MM. 3198 036 90010
9109 Wire Jumper, 0.58MM. 3198 036 90010
9110 Wire Jumper, 0.58MM. 3198 036 90010
9111 Wire Jumper, 0.58MM. 3198 036 90010
9112 Wire Jumper, 0.58MM. 3198 036 90010
9113 Wire Jumper, 0.58MM. 3198 036 90010
9114 Wire Jumper, 0.58MM. 3198 036 90010
9115 Wire Jumper, 0.58MM. 3198 036 90010
9116 Wire Jumper, 0.58MM. 3198 036 90010

System Panel Parts

System Panel Parts
1020 System Panel Asm.. . . . . 3135 037 10712
1008 Connector, 9 Pin 2422 025 16049
1009 Connector, 9 Pin 2422 025 16049
1200 Connector, 5 Pin 2422 025 12481
1201 Connector, 10 Pin. 2422 025 12484
1202 Switch, Tactile. 2422 128 02742
1203 Tuner, V+U PLL 2422 542 90077
1204 Switch, Tactile. 2422 128 02742
1205 Connector, SIMM, 80 Pin. 2422 025 16599
1207 Connector, 4 Pin 2422 025 12479
1210 Connector, 64 Pin. 2422 025 17715
1214 Connector, 10 Pin. 2422 025 12484
1215 Connector, 1 Pin 2422 015 18552
1216 Connector, 1 Pin 2422 015 18551
1217 Connector, 1 Pin 2422 015 18552
1218 Connector, 1 Pin 2422 015 18552
1220 Connector, 64 Pin. 2422 025 17715
1241 Connector, 7 Pin 2422 025 11244
1244 Connector, 3 Pin 2412 020 00725
1251 Connector, 3 Pin 2412 020 00725
1252 Connector, 6 Pin 2422 025 17955
1262 Connector, 3 Pin 2422 025 10768
1303 Connector, 5 Pin 2422 025 10428
1305 Connetort, 7 Pin 2422 025 09407
1312 Connector, 7 Pin 2422 025 11244
1313 Connector, 8 Pin 2422 025 10648
1314 Connector, 9 Pin 2422 025 12827
1335 Connector, 11 Pin. 2422 025 12485
1337 Connector, 1 Pin 2422 015 18552
1344 Connector, 5 Pin 2422 025 12481
1403 Connector, 12 Pin. 2422 025 08333
1600 Resonator Crystal, 12Mhz, 20P, DSX840 R. 2422 543 01095
1681 Connector, 3 Pin 2422 025 10768
1683 Connector, 5 Pin, FFC 0.3. . . . . 2422 025 16563
1700 Connector, 8 Pin 2422 025 12483
2101 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2102 Cap, 100u, 20%, 50v, Electrolytic. . . . 3198 025 51010
2103 Cap, 220u, 20%, 16v, Electrolytic. . . . 3198 025 22210
2104 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2105 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2106 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2107 Cap, 1u, 20%, 50v, Electrolytic. 3198 030 81080
2108 Cap, 2u2, 20%, 25v, Electrolytic 2020 021 91551
2109 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2110 Cap, 470u, 20%, 16v, Electrolytic. . . . 2020 021 91687
2111 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2112 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2113 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2114 Cap, 1000u, 20%, 16v, Electrolytic . . . 3198 026 21020
2115 Cap, 2u2, 20%, 10v, Electrolytic 2020 021 91668
2116 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2117 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2118 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2119 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2120 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2121 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2122 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2123 Cap, 330u, 20%, 16v, Electrolytic. . . . 2020 021 91536
2124 Cap, 470u, 20%, 10v, Electrolytic. . . . 2020 021 91569
2125 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2126 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020

2127 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2129 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2130 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2201 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2202 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2203 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2204 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2205 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2206 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2207 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2208 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2209 Cap, 2u2, +80/-20%, 10v, Ceramic 3198 017 22250
2210 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2211 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2212 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2213 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2214 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2215 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2216 Cap, 82p, 5%, 50v, Ceramic 3198 016 08290
2218 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2219 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2301 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2302 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2303 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2306 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2307 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2308 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2309 Cap, 27p, 5%, 50v, Ceramic 3198 016 02790
2312 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2313 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2314 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2315 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2316 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2317 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2318 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2319 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2320 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2321 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2322 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2323 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2324 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2325 Cap, 1u, 20%, 50v, Electrolytic. . . . 3198 030 81080
2326 Cap, 220u, 20%, 25v, Electrolytic. . . . 3198 025 32210
2327 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2328 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2329 Cap, 22u, 20%, 16v, Electrolytic 2020 012 93536
2330 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2331 Cap, 22n, +80/-20%, 50v, Ceramic 3198 017 22230
2332 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2333 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2334 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2335 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2336 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2337 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2338 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 3198 017 24740
2339 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2340 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2341 Cap, 4u7, 20%, 35v, Electrolytic 3198 030 74780
2342 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2343 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2344 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2345 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2347 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2348 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2349 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2350 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2351 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2352 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2353 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2354 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2355 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2356 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
2357 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2358 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2359 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2360 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2361 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2362 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2363 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2364 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2365 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2366 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2367 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2368 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2369 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2370 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2371 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2372 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2374 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2375 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2376 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2377 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2378 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2379 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2380 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2381 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2382 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2383 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2384 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2385 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2386 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2387 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2388 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2389 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2390 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2391 Cap, 100n, +80/-20%, 25v, Ceramic. . . . 3198 023 21040
2392 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2393 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2394 Cap, 100u, 20%, 16v, Electrolytic. . . . 3198 030 41010
2395 Cap, 6n8, 10%, 50v, Ceramic. 3198 017 06820
2396 Cap, 100p, 5%, 50v, Ceramic. 3198 016 01010
3101 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3102 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3106 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3108 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3109 Res, 10K, 1%, 1/8W, Metalized Glass. . . 2322 734 61003
3110 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3111 Res, 47 ohm, 5%, 1/10W, Metalized Glass. 3198 021 54790
3112 Res, 120K, 1%, 1/8W, Metalized Glass . . 2322 734 61204
3113 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
3118 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3119 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3120 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3121 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3122 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3201 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3202 Res, 3K9, 5%, 1/10W, Metalized Glass . . 3198 021 53920
3203 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3204 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3205 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3206 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3207 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3208 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3209 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3210 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3211 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3212 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3213 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3214 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3215 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3216 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3217 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3218 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3219 Res, 270 ohm, 5%, 1/10W, Metalized Glass 3198 021 52710
3220 Res, 470 ohm, 5%, 1/10W, Metalized Glass 3198 021 54710
3221 Res, 27K, 5%, 1/10W, Metalized Glass . . 3198 021 52730
3222 Res, 150 ohm, 5%, 1/10W, Metalized Glass 3198 021 51510
3223 Res, 180 ohm, 5%, 1/10W, Metalized Glass 3198 021 51810
3224 Res, 330 ohm, 5%, 1/10W, Metalized Glass 3198 021 53310
3225 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3226 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3227 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3228 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3229 Res, 22 ohm, 5%, 1/10W, Metalized Glass. 3198 021 52290
3230 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3231 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3232 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3234 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3235 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 2322 734 66801
3236 Res, 560 ohm, 5%, 1/10W, Metalized Glass 3198 021 55610
3237 Res, 1K2, 1%, 1/8W, Metalized Glass. . . 2322 734 61202
3238 Res, 220K, 5%, 1/10W, Metalized Glass. . 3198 021 52240
3239 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3240 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3241 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3242 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3243 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 2322 734 62202
3305 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3306 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3307 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3308 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3309 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3310 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3311 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3312 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3313 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3314 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3315 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3316 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3317 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320

S = Safety Part Be sure to use exact replacement part.

3318 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3319 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3320 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3321 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3322 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3323 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3324 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3325 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3326 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3328 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3329 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3330 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3331 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3332 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3333 Res, 33 ohm, 5%, 1/10W, Metalized Glass. 3198 021 53390
3334 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3335 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3336 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3337 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3338 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3339 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3340 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3341 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3342 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3343 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3344 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3345 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3346 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3347 Res, 1M, 5%, 1/10W, Metalized Glass. . . 3198 021 51050
3348 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3349 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3350 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3351 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3352 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3353 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3354 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3355 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3356 Res, 1K2, 5%, 1/10W, Metalized Glass . . 3198 021 51220
3357 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3358 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3359 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3360 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3361 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3362 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3363 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3364 Res, 4K7, 5%, 1/10W, Metalized Glass . . 3198 021 54720
3365 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3366 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3370 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3371 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3372 Res, 2K2, 5%, 1/10W, Metalized Glass . . 3198 021 52220
3373 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3374 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3375 Res, 15K, 5%, 1/10W, Metalized Glass . . 3198 021 51530
3376 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3377 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3378 Res, 39K, 5%, 1/10W, Metalized Glass . . 3198 021 53930
3379 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3380 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3381 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3382 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3383 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3384 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3385 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3390 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3391 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3392 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3393 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3394 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
3395 Res, 10 ohm, 5%, 1/10W, Metalized Glass. 3198 021 51090
3396 Res, 1K, 5%, 1/10W, Metalized Glass. . . 3198 021 51020
4104 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4105 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4106 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4107 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4108 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4109 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4110 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4114 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4115 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4116 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4117 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4118 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4119 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4120 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4121 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4129 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5101 Coil, 6u8. . . . . 2422 535 94819
5102 Coil, 1u 2422 535 95387
5103 Coil, 1u 2422 535 95387
5104 Coil, 1u 2422 535 95387
5106 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5107 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5108 Coil, 1u 2422 535 95387
5109 Coil, 1u 2422 535 95387
5110 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5111 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5112 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5113 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5301 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5302 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5303 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5304 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5305 Coil, 2u2. . . . . 3198 018 42280
5306 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5307 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5308 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5309 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5310 Coil, 8u2. . . . . 3198 018 28280
5311 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5312 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5313 Coil, 330u 2422 535 94649
5315 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5316 Inductor, Fixed, 100Mhz, 30 ohm. 2422 549 42958
5317 Coil, 8u2. . . . . 2422 535 96517
6101 Diode, Signal, BAS316. . . . . 3198 010 10630
6102 Diode, Signal, BAS316. . . . . 3198 010 10630
6103 Diode, Signal, BAS316. . . . . 3198 010 10630
6104 Diode, Signal, BAS316. . . . . 3198 010 10630
6105 Diode, Rect, SB140. . . . . 9339 577 60673
6106 Diode, Signal, BAS316. . . . . 3198 010 10630
6107 Diode, Signal, BAS316. . . . . 3198 010 10630
6108 Diode, Signal, BAS316. . . . . 3198 010 10630
6109 Diode, Signal, BAS316. . . . . 3198 010 10630
6110 Diode, Signal, BAS316. . . . . 3198 010 10630
6111 Diode, Signal, BAS316. . . . . 3198 010 10630
6112 Zener Diode, 15 volt 9335 006 90133
6113 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6114 Diode, Signal, 1PS76SB10 . . . . . 9340 453 90115
6201 Zener Diode, 6.8 volt. 9340 548 55115
6202 Zener Diode, 6.8 volt. 9340 548 55115
6300 Diode, Signal, BAS316. . . . . 3198 010 10630
6301 Diode, Signal, BAS316. . . . . 3198 010 10630
6302 Diode, Signal, BAS316. . . . . 3198 010 10630
6304 Diode, Signal, BAS316. . . . . 3198 010 10630
6305 Diode, Signal, BAS316. . . . . 3198 010 10630
6306 Diode, Signal, BAS316. . . . . 3198 010 10630
7001 Transistor, NPN, BC847B. 3198 010 42030
7002 Transistor, NPN, BC847B. 3198 010 42030
7003 Transistor, NPN, BC847B. 3198 010 42030
7004 Transistor, NPN, BC847B. 3198 010 42030
7005 Transistor, PNP, BC857B. 3198 010 42150
7006 Transistor, PNP, BC857B. 3198 010 42150
7007 Transistor, PNP, BC857B. 3198 010 42150
7008 Transistor, NPN, BC847B. 3198 010 42030
7009 Transistor, NPN, BC847B. 3198 010 42030
7010 Transistor, NPN, BC847B. 3198 010 42030
7011 Transistor, NPN, BC847B. 3198 010 42030
7012 Transistor, NPN, BC847B. 3198 010 42030
7013 Transistor, PNP, BC857B. 3198 010 42150
7014 F.E.T. STD3NK60Z. 9322 195 38668
7015 Transistor, PNP, BC857B. 3198 010 42150
7017 Transistor, PNP, BC857B. 3198 010 42150
7018 Transistor, NPN, BC847B. 3198 010 42030
7020 Transistor, NPN, BC847B. 3198 010 42030
7021 Transistor, NPN, BC847B. 3198 010 42030
7022 Transistor, NPN, BC847B. 3198 010 42030
7023 Transistor, NPN, BC847B. 3198 010 42030
7024 Transistor, PNP, BC857B. 3198 010 42150
7025 Transistor, NPN, BC847B. 3198 010 42030
7101 IC, TC74HC590AF-EL 9322 167 76668
7102 IC, TC74HC590AF-EL 9322 167 76668
7103 IC, CY7C199-15ZC 9322 153 66668
7104 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7105 IC, MOS, Digital, Logic, 74HCT573DB. . . 9351 869 80118
7106 IC, CD74ACT151M. 9322 195 64668
7107 IC, M24C32-WMN6. . . . . 9322 124 74668
7108 IC, P89C668HBA/00. . . . . 9352 654 18112
7109 IC, TL431BCLP. 9322 115 98676
7110 IC, TLC0832CD. 9322 185 44668
7111 IC, NE555D 9336 561 10623
7113 IC, TEA6422D 9322 116 87668
7114 IC, PCF8574T 9337 280 80118
7115 IC, TL431BCLP. 9322 115 98676
7116 IC, TDA7309D 9322 110 45668
7117 IC, TDA1308T/N1. . . . . 9350 721 10115
7118 IC, NE555D 9336 561 10623
7120 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
7121 F.E.T. Signal, BSN20 . . . . . 9340 125 00235
9001 Wire Jumper, 0.58MM. 3198 036 90010
9002 Wire Jumper, 0.58MM. 3198 036 90010

LED Sensor Panel Parts

LED Sensor Panel Parts

S = Safety Part Be sure to use exact replacement part.

1024 LED Panel Asm.	3135 037 10741
0207 Holder, LED.	3139 124 23831
0209 Holder, Photo Diode.	3104 304 19732
1201 Connector, 4 Pin	2422 025 12489
1214 Connector, 10 Pin.	2422 025 12493
2001 Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2002 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2003 Cap, 100u, 20%, 10v, Electrolytic.	3198 025 11010
2004 Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
3001 Res, 150 ohm, 5%, 1/16W, Metalized Glass	3198 021 31510
3002 Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
3003 Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3004 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3005 Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3006 Res, 330 ohm, 5%, 1/10W, Metalized Glass	3198 021 53310
3007 Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3008 Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3009 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3010 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3011 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3012 Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3013 Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3014 Res, 1M5, 5%, 1/16W, Metalized Glass	2322 702 60155
3016 Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3017 Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4003 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4004 Res, Zero ohm, "Chip" Jumper	3198 021 90030
4005 Res, Zero ohm, "Chip" Jumper	3198 021 90030
6000 LED, TLUV5300.	9338 792 00682
6003 IR Receiver, TSOP2136UH1	9322 159 21667
6004 Optical Sensor, BPW46.	9322 032 38682
7000 IC, LM358DR2	9339 265 90668
7001 Transistor, NPN, BC847B.	3198 010 42030

Side Jack Panel Parts

Side Jack Panel Parts	
1028 Side Jack Panel Asm.	3135 037 10751
1300 Switch, Push, 2 Pin, 2 Position, 30v	2422 128 03068
1301 Socket, MDin, 4 Pin, TCS7959 Y	2422 026 05157
1302 Socket, Cinch, 3 Pin	2422 026 05493
1303 Socket, Phone, 1 Pin	2422 026 04747
1335 Connector, 11 Pin.	2422 025 12485
1337 Connector, 1 Pin	2422 015 18552
1344 Connector, 5 Pin	2422 025 12481
2107 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2108 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2109 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2110 Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2111 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2112 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2113 Cap, 680p, 5%, 50v, Ceramic.	3198 016 06810
2114 Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2115 Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
3106 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3107 Res, 75 ohm, 5%, 1/10W, Metalized Glass.	3198 021 57590
3115 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
3116 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3117 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118 Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3119 Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3120 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3121 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3122 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3123 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3124 Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090
3125 Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
4002 Res, Zero ohm, "Chip" Jumper	3198 021 90020
5001 Coil, 270n	3198 018 32770
5002 Coil, 270n	3198 018 32770
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 Zener Diode, 6.8 volt.	9340 386 40115
6004 Zener Diode, 6.8 volt.	9340 386 40115
6005 Zener Diode, 6.8 volt.	9340 386 40115
6006 Zener Diode, 6.8 volt.	9340 386 40115
6007 Zener Diode, 6.8 volt.	9340 386 40115
6008 Zener Diode, 6.8 volt.	9340 386 40115
6009 Zener Diode, 6.8 volt.	9340 386 40115
6010 Zener Diode, 6.8 volt.	9340 386 40115
6011 Zener Diode, 6.8 volt.	9340 386 40115
6012 Zener Diode, 6.8 volt.	9340 386 40115

LED/Keyboard Panel Parts

LED/Keyboard Panel Parts	
1032 LED/Keyboard Panel Asm..	3135 037 10771
1001 Switch, Tactile.	2422 128 02742
1002 Switch, Tactile.	2422 128 02742
1003 Switch, Tactile.	2422 128 02742
1004 Switch, Tactile.	2422 128 02742
1005 Switch, Tactile.	2422 128 02742
1006 Switch, Tactile.	2422 128 02742
1201 Connector, 4 Pin	2422 025 12489
1202 Connector, 1 Pin	2422 015 18551
1203 LED, Holder (Not Shown).	3135 034 00711
3001 Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322 734 63901
3002 Res, 200 ohm, 1%, 1/8W, Metalized Glass.	2322 734 62001
3003 Res, 620 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66201
3004 Res, 1K1, 1%, 1/8W, Metalized Glass.	2322 734 61102
3006 Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3007 Res, 2K4, 1%, 1/8W, Metalized Glass.	2322 734 62402
3009 Res, 910 ohm, 1%, 1/8W, Metalized Glass.	2322 734 69101
3010 Res, 160 ohm, 1%, 1/8W, Metalized Glass.	2322 734 61601
3011 Res, 120 ohm, 5%, 1/10W, Metalized Glass	3198 021 51210
4000 Res, Zero ohm, "Chip" Jumper	3198 021 90020
6001 Zener Diode, 6.8 volt.	9340 386 40115
6002 Zener Diode, 6.8 volt.	9340 386 40115
6003 LED, TLHB5400.	9322 188 10682
7000 Transistor, NPN, BC847B.	3198 010 42030

Thermal Sensor Panel Parts

Thermal Sensor Panel Parts	
1034 Thermal Sensor Panel Asm..	3135 037 10781
1202 Connector, 3 Pin	2422 025 10775
2001 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2002 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
3001 Res, 5K6, 1%, 1/8W, Metalized Glass.	2322 734 65602
3002 Res, 68K, 1%, 1/8W, Metalized Glass.	2322 734 66803
3003 Res, 820 ohm, 1%, 1/8W, Metalized Glass.	2122 118 05988
3004 Res, 680 ohm, 1%, 1/8W, Metalized Glass.	2322 734 66801
3005 Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
S 3006 NTC, 10K, 5%, 1/2W	2322 640 33103
3007 Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3008 Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
4001 Res, Zero ohm, "Chip" Jumper	3198 021 90020
7001 Transistor, NPN, BC847B.	3198 010 42030
7002 Transistor, NPN, BC847B.	3198 010 42030

Input Power Panel Parts

Input Power Panel Parts	
1045 Input Power Panel Asm.	3135 037 11421
0001 Insulator, SP-900.	3135 010 02331
0002 Clip, Transistor	3135 011 02681
0013 Spring	3139 121 24583
0014 Spring	3139 121 24583
0018 Insulator, SP-900.	3135 010 02331
0019 Clip, Transistor	3135 011 02681
0020 Spring	3139 121 24583
0201 Spring	3135 011 01041
0215 Insulator.	3135 010 02321
1206 Connector, 1 Pin	2422 015 18552
1208 Surge Protector, DSP-501N-A21F	2422 549 42349
1209 Connector, 1 Pin	2422 015 18552
S 1210 Relay, 1 Pin, 5V, 5A	2422 132 07411
S 1211 Fuse/Clip, 6A3, 250V, IEC.	2422 093 00036
1212 Connector, 4 Pin	2422 025 15503
S 1214 Protection Device, 5.5 KVDC, UL5500.	2422 549 43369
1215 Heatsink	3135 031 60051
1217 Connector, 1 Pin	2422 015 18552
1218 Connector, 1 Pin	2422 015 18552
1310 Connector, 2 Pin	2422 025 11196
1311 Connector, 6 Pin	2422 025 14044
1316 Connector, 4 Pin	2422 025 10647
1401 Heatsink	3135 031 60071
1402 Heatsink, TO-220	3135 031 60133
1403 Connector, 12 Pin.	2422 025 08333
1410 Connector, 2 Pin	2412 020 00724
1460 Connector, 3 Pin	2412 020 00725
1518 Heatsink	3135 031 60071
1520 Heatsink, TO-220	3135 031 60133
2200 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2201 Cap, 220n, 20%, 275v, Metalized Polypropylene	2222 336 29146
2202 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2203 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2205 Cap, 680n, 20%, 275v, Metalized Polypropylene	2222 336 29149
2209 Cap, 1m5, 20%, 200v, Electrolytic.	2020 021 91747
2210 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2211 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2212 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
S 2213 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
S 2214 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2215 Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2216 Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020
2217 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557
2219 Cap, 100u, 20%, 400v, Electrolytic	2020 021 91759
S 2220 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2225 Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2249 Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 2421 Cap, 470p, 10%, 50v, Ceramic	2020 554 90169
2423 Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710
2424 Cap, 1n, 10%, 1000v, Ceramic	2020 558 90557

S = Safety Part Be sure to use exact replacement part.

2431	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2432	Cap, 1n, 10%, 1000v, Ceramic	3198 019	61020
2433	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
S 2435	Cap, 470p, 10%, 50v, Ceramic	2020 554	90169
2436	Cap, 47u, 20%, 50v, Electrolytic	2020 021	91521
2437	Cap, 100p, 10%, 1000v, Ceramic	2252 711	95001
2441	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2442	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2443	Cap, 4n7, 10%, 50v, Ceramic.	3198 019	14720
2444	Cap, 22u, 20%, 35v, Electrolytic	2020 021	91811
2453	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2454	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2456	Cap, 470p, 10%, 1000v, Ceramic	3198 019	64710
2457	Cap, 1000u, 20%, 35v, Electrolytic	2020 021	91411
2472	Cap, 220u, 20%, 10v, Electrolytic.	3198 025	12210
2473	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2522	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2523	Cap, 470p, 10%, 50v, Ceramic	3198 019	14710
2530	Cap, 220p, 10%, 1000v, Ceramic	3198 019	62210
2534	Cap, 100u, 20%, 400v, Electrolytic	2020 021	91759
2535	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2536	Cap, 1n, 10%, 1000v, Ceramic	2020 558	90557
2541	Cap, 10u, 20%, 50v, Electrolytic	2020 021	91808
2542	Cap, 10n, +80/-20%, 50v, Ceramic	3198 019	21030
2543	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019	22230
2544	Cap, 47u, 20%, 16v, Electrolytic	2020 021	91804
3204	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242	13225
3207	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3210	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3211	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
S 3212	VDR, DC, 1MA/495V, MAX 850VB.	2322 595	90021
3213	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3214	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3215	Res, 0R68, 10%, 5W, Wire Wound	2322 251	41687
3216	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3217	Res, 220 ohm, 20%, 1/2W, Carbon Film	2120 103	90042
3218	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3219	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242	13475
3245	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021	53320
3246	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3247	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3248	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3249	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3252	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3253	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021	51010
3403	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011	01230
3425	Res, 100 ohm, 5%, 3W, Metal Film	2120 105	93581
3426	Res, 56K, 1%, 3/5W, Metal Film	2312 915	15603
3429	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3430	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3431	Res, 56K, 5%, 1/6W, Carbon Film.	3198 011	05630
3432	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3433	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3438	Res, 10K, 1%, 3/5W, Metal Film	2312 915	11003
3441	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011	04720
3444	Res, 820K, 1%, 3/5W, Metal Film.	2312 915	18204
3445	Res, 100K, 1%, 3/5W, Metal Film.	2312 915	11004
3453	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3456	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3460	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3461	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3462	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021	54720
3463	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3464	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021	52720
3465	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021	53920
3466	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3470	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198 011	04790
3471	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021	51020
3472	Res, 1K2, 5%, 1/6W, Carbon Film.	3198 011	01220
3473	Res, 1K, 5%, 1/6W, Carbon Film	3198 011	01020
3474	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021	51040
3475	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3476	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021	51030
3522	Res, 33 ohm, 5%, 2W, Metal Film.	2120 105	93418
3526	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011	01030
3533	Res, 6R8, 1%, 3/5W, Metal Film	2312 915	16808
3536	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011	01090
3537	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011	03320
3538	Res, 1K, 1%, 3/5W, Metal Film.	2312 915	11002
3539	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011	04710
3540	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3541	Res, 150K, 1%, 3/5W, Metal Film.	2312 915	11504
3542	Res, 120K, 1%, 3/5W, Metal Film.	2312 915	11204
3543	Res, 3K, 1%, 1/8W, Metalized Glass	2322 734	63002
3544	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021	52230
5210	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5211	Inductor, Fixed, 100MHz, 30 ohm.	3198 018	90060
5212	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5213	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5214	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5218	Filter, Mains, 8mH, 7A, JLB2806.	2422 549	44591
5406	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5407	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5408	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5409	Coil, 1u	2422 535	95387
5410	Transformer, SMT Layer, US28206-01	2422 531	02553
5411	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5412	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5417	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5419	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5420	Coil, 1u	2422 535	95387
5422	Coil, 1u	2422 535	95387
5502	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5503	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5507	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5509	Fixed, Inductor, 100MHz, 80 ohm.	3198 018	90020
5510	Coil, Choke, 190uH, UC28214-03 Y	2422 536	00594
5514	Filter, Mains, 100uH, 2A2, W8051	2422 549	44101
6200	Diode, Signal, 1N4148.	3198 010	10010
6201	Diode, Bridge Rect, GBU6JL-7002	9322 138	08667
6202	Diode, Bridge Rect, GBU4JL-7002	9322 132	55667
6402	Diode, Signal, 1N4148.	3198 010	10010
6403	Diode, Signal, BAS316.	3198 010	10630
6404	Optic Coupler, CQY80NG	9338 941	50682
6405	Diode, Rect, BYV95C	9335 001	80133
6406	Zener Diode, 18 volt	3198 010	21890
6407	Zener Diode, 6.8 volt.	3198 010	26880
6408	Diode, Signal, BAS316.	3198 010	10630
6409	Diode, Signal, 1N4148.	3198 010	10010
6410	Optic Coupler, CQY80NG	9338 941	50682
6411	Diode, Rect, BY229X-800	9340 380	30127
6413	Diode, Rect, BYW29EX-200.	9340 412	80127
6414	Diode, Rect, BYW29EX-200.	9340 412	80127
6501	Diode, Rect, BYV29F-400	9338 673	00127
7211	Transistor, NPN, BC547B.	3198 020	40030
7212	Transistor, PNP, BC857B.	3198 010	42150
7402	IC, TOP247Y.	9322 181	88687
7406	IC, TL431BCLP.	9322 115	98676
7408	Transistor, PNP, BC857B.	3198 010	42150
7409	Transistor, NPN, BC847B.	3198 010	42030
7410	Transistor, PNP, BC857B.	3198 010	42150
7411	Transistor, NPN, BC847B.	3198 010	42030
7412	Transistor, PNP, BC857B.	3198 010	42150
7500	Transistor, PNP, BC857B.	3198 010	42150
7502	IC, TOP247Y.	9322 181	88687
7506	IC, TL431BCLP.	9322 115	98676
9010	Wire Jumper, 0.58MM.	3198 036	90010
9011	Wire Jumper, 0.58MM.	3198 036	90010
9016	Wire Jumper, 0.58MM.	3198 036	90010
9020	Wire Jumper, 0.58MM.	3198 036	90010
9022	Wire Jumper, 0.58MM.	3198 036	90010
9023	Wire Jumper, 0.58MM.	3198 036	90010
9024	Wire Jumper, 0.58MM.	3198 036	90010
9025	Wire Jumper, 0.58MM.	3198 036	90010
9026	Wire Jumper, 0.58MM.	3198 036	90010
9027	Wire Jumper, 0.58MM.	3198 036	90010
9028	Wire Jumper, 0.58MM.	3198 036	90010
9029	Wire Jumper, 0.58MM.	3198 036	90010
9201	Wire Jumper, 0.58MM.	3198 036	90010
9204	Wire Jumper, 0.58MM.	3198 036	90010
9206	Wire Jumper, 0.58MM.	3198 036	90010
9207	Wire Jumper, 0.58MM.	3198 036	90010

Audio Amp Panel Parts

Audio Amp Panel Parts

0070	Clip, Transistor	3135 011	02681
0071	Insulator.	3135 010	02351
1012	Audio Amp Panel Asm.	3135 037	11412
1216	Connector, 1 Pin	2422 015	18551
1305	Connetort, 7 Pin	2422 025	09407
1316	Connector, 4 Pin	2422 025	10647
1321	Connector.	2422 025	15781
1700	Connector, 8 Pin	2422 025	12483
1701	Heatsink, Vertical, Audio.	3135 031	60151
1702	Thyristor, BT169B.	9338 268	50126
1703	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
1704	Inductor, fixed, line Filter, 50V, 2A4	2422 549	43778
2701	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2702	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2703	Cap, 680n, 10%, 63v, Metalized Polyester	2222 365	75684
2704	Cap, 10n, +80/-20%, 50v, Ceramic	3198 017	21030
2705	Cap, 2u2, 20%, 50v, Electrolytic	3198 025	52280
2706	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2707	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2708	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023	22240
2709	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2710	Cap, 470p, 5%, 50v, Ceramic.	3198 016	04710
2711	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2712	Cap, 220n, +80/-20%, 50v, Ceramic.	2238 580	19814
2713	Cap, 100n, 10%, 16v, Ceramic	3198 017	01040
2714	Cap, 33n, 10%, 50v, Ceramic.	3198 017	03330
2715	Cap, 1n, 5%, 50v, Ceramic.	3198 016	01020
2716	Cap, 330p, 5%, 50v, Ceramic.	3198 016	03310
2717	Cap, 100p, 5%, 50v, Ceramic.	3198 016	01010

S = Safety Part Be sure to use exact replacement part.

2718 Cap, 22p, 5%, 50v, Ceramic 3198 016 02290
2719 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2720 Cap, 220n, +80/-20%, 25v, Ceramic. . . . 3198 023 22240
2721 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2722 Cap, 470p, 5%, 50v, Ceramic. 3198 016 04710
2723 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2724 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2725 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2726 Cap, 33n, 10%, 50v, Ceramic. 3198 017 03330
2727 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2728 Cap, 330p, 5%, 50v, Ceramic. 3198 016 03310
2729 Cap, 100n, 10%, 16v, Ceramic 3198 017 01040
2730 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2731 Cap, 2u2, 20%, 35v, Electrolytic 2020 021 91637
2732 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2733 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2734 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2735 Cap, 10u, 20%, 50v, Electrolytic 3198 025 51090
2736 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2737 Cap, 10n, +80/-20%, 50v, Ceramic 3198 017 21030
2739 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2740 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2741 Cap, 1n, 5%, 50v, Ceramic. 3198 016 01020
2742 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2743 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2744 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2745 Cap, 220n, +80/-20%, 50v, Ceramic. . . . 2238 580 19814
2763 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2776 Cap, 47u, 20%, 50v, Electrolytic 3198 025 54790
2777 Cap, 680n, 10%, 50v, Polyester 3198 014 06840
2780 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
2781 Cap, 100n, 10%, 50v, Polyester 3198 014 01040
3701 Res, 10K, 5%, 1/6W, Carbon Film. 3198 011 01030
3702 Res, 6K8, 5%, 1/6W, Carbon Film. 3198 011 06820
3703 Res, 33K, 5%, 1/10W, Metalized Glass . . 3198 021 53330
3704 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3705 Res, 10 ohm, 5%, 1/6W, Carbon Film . . . 3198 011 01090
3706 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3707 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3708 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3709 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3710 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3711 Res, 120K, 5%, 1/4W, Carbon Film 2122 101 02074
3712 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3713 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3714 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3715 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
3716 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3717 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3718 Res, 150K, 5%, 1/10W, Metalized Glass. . 3198 021 51540
3719 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3720 Res, 1K, 5%, 2W, Metal Film. 2120 105 93546
3721 Res, 5K6, 5%, 1/10W, Metalized Glass . . 3198 021 55620
3722 Res, 68K, 5%, 1/10W, Metalized Glass . . 3198 021 56830
3723 Res, 56K, 5%, 1/10W, Metalized Glass . . 3198 021 55630
3724 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3725 Res, 22K, 5%, 1/10W, Metalized Glass . . 3198 021 52230
3726 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3727 Res, 47K, 5%, 1/10W, Metalized Glass . . 3198 021 54730
3728 Res, 220 ohm, 5%, 1/10W, Metalized Glass 3198 021 52210
3729 Res, 220 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 02210
3730 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3731 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3732 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3733 Res, 1K5, 5%, 1/6W, Carbon Film. 3198 011 01520
3734 Res, 100K, 5%, 1/10W, Metalized Glass. . 3198 021 51040
3790 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3791 Res, 100 ohm, 5%, 1/10W, Metalized Glass 3198 021 51010
3792 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3793 Res, 100 ohm, 5%, 1/6W, Carbon Film. . . 3198 011 01010
3796 Res, 10K, 5%, 1/10W, Metalized Glass . . 3198 021 51030
3797 Res, 3K3, 5%, 1/10W, Metalized Glass . . 3198 021 53320
3798 Res, 3K3, 5%, 1/6W, Carbon Film. 3198 011 03320
3799 Res, 47K, 5%, 1/6W, Carbon Film. 3198 011 04730
4700 Res, Zero ohm, "Chip" Jumper 3198 021 90020
4701 Res, Zero ohm, "Chip" Jumper 3198 021 90020
5701 Inductor, Fixed, 68uH, 10% 2422 536 00504
5702 Inductor, Fixed, 68uH, 10% 2422 536 00504
5707 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5708 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5713 Coil, 1u 2422 535 95387
5714 Coil, 1u 2422 535 95387
5715 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
5716 Fixed, Inductor, 100MHz, 80 ohm. 3198 018 90020
6701 Diode, Signal, 1N4148. . . . . 3198 010 10010
6702 Diode, Signal, 1N4148. . . . . 3198 010 10010
6703 Diode, Signal, 1N4148. . . . . 3198 010 10010
6704 Diode, Signal, BAS316. . . . . 3198 010 10630
6705 Diode, Signal, BAS316. . . . . 3198 010 10630
6706 Diode, Signal, BAS316. . . . . 3198 010 10630
6707 Diode, Signal, BAS316. . . . . 3198 010 10630
6708 Diode, Signal, BAS316. . . . . 3198 010 10630
6709 Diode, Signal, BAS316. . . . . 3198 010 10630
6710 Diode, Signal, BAS316. . . . . 3198 010 10630
6711 Diode, Signal, BAS316. . . . . 3198 010 10630
7700 IC, TDA7490. . . . . 9322 147 50667
7701 Transistor, NPN, BC847B. 3198 010 42030
7704 Transistor, NPN, BC847B. 3198 010 42030
7705 Transistor, NPN, BC847B. 3198 010 42030
7706 Transistor, PNP, BC857B. 3198 010 42150
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 Transistor, NPN, BC847B. 3198 010 42030
9012 Wire Jumper, 0.58MM. 3198 036 90010
9019 Wire Jumper, 0.58MM. 3198 036 90010
9026 Wire Jumper, 0.58MM. 3198 036 90010
9027 Wire Jumper, 0.58MM. 3198 036 90010
9030 Wire Jumper, 0.58MM. 3198 036 90010
9031 Wire Jumper, 0.58MM. 3198 036 90010
9032 Wire Jumper, 0.58MM. 3198 036 90010
9033 Wire Jumper, 0.58MM. 3198 036 90010
9034 Wire Jumper, 0.58MM. 3198 036 90010

DW PIP Panel Parts

DW PIP Panel Parts
0200 Connector, Printed Circuit 4822 267 10734
0201 Connector, B10B-EH-A 4822 267 10557
0205 Connector, 10 Pin. 2422 025 16587
0207 Connector, Printed Circuit, 4 Pin. . . . 4822 267 10565
0236 Connector, Printed Circuit 4822 267 10735
0237 Connector, Printed Circuit, 1 Pin. . . . 4822 267 10676
1184 DW PIP Panel Asm.. . . . . 3139 177 20061
1327 Crystal, 12 Mhz. 4822 242 10694
1334 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1352 Filter, SAW, 45MHZ75. . . . . 2422 549 43074
1501 Crystal, Resonator, 32Khz76. . . . . 2422 543 01069
2261 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2262 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2265 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2269 Cap, 47n, 10%, 50v, Ceramic. 4822 126 13751
2301 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2302 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2303 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2306 Cap, 10n, 10%, 50V 5322 126 11583
2309 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2311 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2312 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2313 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2314 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2316 Cap, 22n, 10%, 25V 4822 126 14494
2317 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2319 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2321 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2322 Cap, 10u, 20%, 63V 4822 124 40248
2324 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2327 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2328 Cap, 33p, 5%, 50v, Ceramic 2222 867 15339
2331 Cap, 2u2, 20%, 50v, Electrolytic 4822 124 22652
2332 Cap, 220n, +/-80/20, 25v, Ceramic. . . . 4822 126 14076
2333 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2334 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2335 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2336 Cap, 820p, 5%, 50v, Ceramic. 5322 126 10184
2338 Cap, 2,2nF, 10%, 63V, Ceramic. 4822 122 33127
2342 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2345 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2348 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2351 Cap, 10nF, 20%, 50V, Ceramic 4822 122 33177
2354 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2355 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2356 Cap, 470n, +80/-20%, 16v, Ceramic. . . . 4822 126 13482
2357 Cap, 10p, 1%, 50v, Ceramic 2238 861 18109
2372 Cap, 4n7, 10%, 63v, Ceramic. 5322 126 10223
2373 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2374 Cap, 22n, 10%, 63v, Ceramic. 5322 122 32654
2375 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2376 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2377 Cap, 1n, 5%, 50v, Ceramic. 5322 126 10511
2380 Cap, 10u, 20%, 63V 4822 124 40248
2385 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2386 Cap, 470p, 5%, 50v, Ceramic. 4822 126 13881
2390 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2391 Cap, 100p, 5%, 50v, Ceramic. 2020 552 94427
2392 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2393 Cap, 1n, 5%, 25v, Ceramic. 3198 016 31020
2401 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2402 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2403 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2404 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2405 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2411 Cap, 10u, 20%, 63V 4822 124 40248
2412 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879
2415 Cap, 220n, +80/-20%, 16v, Ceramic. . . . 4822 126 13879

S = Safety Part Be sure to use exact replacement part.

2431 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2432 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2434 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2436 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2438 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2439 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2440 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2501 Cap, 22p, 5%, 50V Ceramic. 5322 122 32658
2502 Cap, 8.2p, 0.5%, 50V 4822 126 14487
2503 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2504 Cap, 68n, 10%, 25v, Ceramic. 2020 552 96325
2505 Cap, 560p, 10%, 50v, Ceramic 4822 126 14249
2506 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2507 Cap, 1uF, 20%, 63V, Electrolytic 4822 124 21913
2508 Cap, 6n8, 10%, 63v, Ceramic. 5322 126 11582
2509 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2511 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2811 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2812 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2813 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2814 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2816 Cap, 10u, 20%, 63V 4822 124 40248
2817 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2818 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2819 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2821 Cap, 10u, 20%, 63V 4822 124 40248
2822 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2823 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2824 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2825 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2826 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2827 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2828 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2829 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2831 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2832 Cap, 1u, +80/-20%, 16v, Ceramic. 4822 126 14043
2833 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2834 Cap, 10u, 20%, 63V 4822 124 40248
2836 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2837 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2838 Cap, 220u, 20%, 6.3v, Electrolytic . . . 4822 124 11912
2839 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2841 Cap, 10u, 20%, 63V 4822 124 40248
2842 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2843 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2844 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2846 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2847 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2848 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2849 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2851 Cap, 10u, 20%, 63V 4822 124 40248
2852 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2853 Cap, 10u, 20%, 63V 4822 124 40248
2854 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2856 Cap, 150p, 2%, 63v, Ceramic. 5322 122 33538
2857 Cap, 150p, 5%, 50v, Ceramic. 4822 122 33753
2861 Cap, 10u, 20%, 63V 4822 124 40248
2862 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2863 Cap, 22u, 50v, Electrolytic Aluminum . . 4822 124 81151
2864 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2866 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2867 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2868 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2869 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2871 Cap, 1u, +80/-20%, 10v, Ceramic. 3198 017 41050
2872 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2873 Cap, 47n, 10%, 16v, Ceramic. 3198 017 34730
2874 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2876 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2877 Res, Zero ohm, "Chip" Jumper 4822 051 30008
2878 Cap, 100n, 10%, 50v, Ceramic 4822 126 14585
2879 Cap, 100n, +80/-20%, 50v, Ceramic. . . . 2238 586 59812
2891 Cap, 1nF, 10%, 63V, Ceramic. 5322 122 31647
2892 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2893 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2894 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2895 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2896 Cap, 47pF, 1%, 63V, Ceramic. 4822 126 13692
2897 Cap, 47pF, 5%, 50V, Ceramic. 4822 126 11785
2898 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
2899 Cap, 100u, 20%, 25v, Electrolytic. . . . 4822 124 40207
3263 Res, 2K2, 1%, 1/8W, Metalized Glass. . . 4822 117 11449
3264 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3267 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3268 Res, 10 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20109
3270 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3301 Res, 1k, 5%, 1/16W 4822 051 30102
3302 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3305 Res, 2K7, 1%, 1/8W, Metalized Glass. . . 4822 117 12955
3311 Res, 27K, 5%, 1/8W, Metalized Glass. . . 4822 051 20273
3312 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3315 Res, 39K, 1%, 1/8W, Metalized Glass. . . 4822 117 12708
3316 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3318 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3321 Res, 10k, 5%, 1/16W. 4822 051 30103
3322 Res, 8K2, 1%, 1/16W. 4822 117 12902
3324 Res, 390 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20391
3326 Res, 1K, 1%, 0,125W. 5322 117 12487
3327 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3329 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3330 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3333 Res, 1k, 5%, 1/16W 4822 051 30102
3334 Res, 470R, 5%, 0,062W. 4822 051 30471
3335 Res, 120 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20121
3336 Res, 1k, 5%, 1/16W 4822 051 30102
3338 Res, 75 ohm, 1%, 1/8W, Metalized Glass . 4822 117 11927
3339 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3340 Res, 2k2, 5%, 1/16W. 4822 051 30222
3341 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3344 Res, 47 ohm, 5%, 1/8W, Metalized Glass . 4822 051 20479
3346 Res, 560 ohm, 5%, 1/16W. 4822 051 30561
3347 Res, 390 ohm, 5%, 1/16W. 4822 051 30391
3348 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3364 Res, 1k, 5%, 1/16W 4822 051 30102
3365 Res, 1K, 1%, 0,125W. 5322 117 12487
3370 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3371 Res, 15K, 1%, 1/8W, Metalized Glass. . . 4822 116 83933
3374 Res, 4k7, 5%, 1/16W. 4822 051 30472
3381 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3382 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3383 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3384 Res, 10k, 5%, 1/16W. 4822 051 30103
3385 Res, 4k7, 5%, 1/16W. 4822 051 30472
3386 Res, 10k, 5%, 1/16W. 4822 051 30103
3387 Res, 39K, 5%, 0,062W 4822 051 30393
3388 Res, 10k, 5%, 1/16W. 4822 051 30103
3389 Res, 4k7, 5%, 1/16W. 4822 051 30472
3390 Res, 470R, 5%, 0,062W. 4822 051 30471
3401 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3402 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3403 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3404 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3405 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3411 Res, 47k, 1%, 1/16W. 4822 117 12925
3412 Res, 47k, 1%, 1/16W. 4822 117 12925
3413 Res, 1k, 5%, 1/16W 4822 051 30102
3414 Res, 47k, 1%, 1/16W. 4822 117 12925
3415 Res, 47k, 1%, 1/16W. 4822 117 12925
3416 Res, 1k, 5%, 1/16W 4822 051 30102
3417 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3418 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3419 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3423 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3424 Res, 560 ohm, 5%, 1/8W, Metalized Glass. 4822 051 20561
3431 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3432 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3437 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3438 Res, 470R, 5%, 0,062W. 4822 051 30471
3439 Res, Zero ohm, "Chip" Jumper 4822 051 20008
3451 Res, 4k7, 5%, 1/16W. 4822 051 30472
3453 Res, 4k7, 5%, 1/16W. 4822 051 30472
3456 Res, 4k7, 5%, 1/16W. 4822 051 30472
3457 Res, 4k7, 5%, 1/16W. 4822 051 30472
3458 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3460 Res, 4k7, 5%, 1/16W. 4822 051 30472
3461 Res, 4k7, 5%, 1/16W. 4822 051 30472
3462 Res, 2R2, 5%, 1/3W,. 4822 052 10228
3501 Res, 470K, 5%, 1/8W, Metalized Glass . . 4822 051 20474
3502 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3503 Res, 470R, 5%, 0,062W. 4822 051 30471
3504 Res, 6K8, 5%, 0,062W 4822 051 30682
3506 Res, 10k, 5%, 1/16W. 4822 051 30103
3507 Res, 6K8, 1%, 1/8W, Metalized Glass. . . 4822 117 11507
3508 Res, 10M, 5%, 1/16W, Metalized Glass . . 3198 021 31060
3509 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3510 Res, 100 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11373
3801 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3802 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3803 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3804 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3805 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3806 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3807 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3808 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3809 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3810 Res, 680 ohm, 5%, 1/16W. 4822 051 30681
3811 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3812 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3813 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3814 Res, 22k, 5%, 1/16W. 4822 051 30223
3816 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3817 Res, 150 ohm, 5%, 1/16W. 4822 051 30151
3818 Res, 47 ohm, 5%, 1/16W 4822 051 30479
3821 Res, 150 ohm, 5%, 1/16W. 4822 051 30151

S = Safety Part Be sure to use exact replacement part.

3822 Res, 4k7, 5%, 1/16W. 4822 051 30472
3823 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3824 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3825 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3826 Res, 3k3, 5%, 1/16W. 4822 051 30332
3827 Res, 1K8, 1%, 0,063W 4822 117 12903
3828 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3829 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3832 Res, 39K, 5%, 0,062W 4822 051 30393
3833 Res, 3k3, 5%, 1/16W. 4822 051 30332
3834 Res, 1K8, 1%, 0,063W 4822 117 12903
3836 Res, 3k3, 5%, 1/16W. 4822 051 30332
3837 Res, 1K8, 1%, 0,063W 4822 117 12903
3838 Res, 39K, 5%, 0,062W 4822 051 30393
3839 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3846 Res, 220 ohm, 1%, 1/8W, Metalized Glass. 4822 117 11503
3854 Res, 100 ohm, 5%, 1/16W. 4822 051 30101
3856 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3857 Res, 10K, 1%, 1/8W, Metalized Glass. . . 4822 117 10833
3858 Res, 5K6, 5%, 1/8W, Metalized Glass. . . 4822 051 20562
3862 Res, 1R, 5%, 0,33W 4822 052 10108
3863 Res, 1R, 5%, 0,33W 4822 052 10108
3865 Res, 3k3, 5%, 1/16W. 4822 051 30332
3866 Res, 1k, 5%, 1/16W 4822 051 30102
3868 Res, 1K8, 1%, 0,063W 4822 117 12903
3869 Res, 3k3, 5%, 1/16W. 4822 051 30332
3871 Res, 2k2, 5%, 1/16W. 4822 051 30222
3872 Res, 470R, 5%, 0,062W. 4822 051 30471
3873 Res, 1k5, 5%, 1/16W. 4822 051 30152
3874 Res, 1k5, 5%, 1/16W. 4822 051 30152
3876 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3878 Res, 1k, 5%, 1/16W 4822 051 30102
3879 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3881 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3884 Res, 680 ohm, 1%, 1/8W, Metalized Glass. 4822 117 10361
3886 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3887 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3888 Res, Zero ohm, "Chip" Jumper 4822 051 30008
3889 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3890 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3891 Res, 33 ohm, 5%, 1/16W 4822 051 30339
3892 Res, 4K7, 5%, 1/8W, Metalized Glass. . . 4822 051 20472
3893 Res, 1k5, 5%, 1/16W. 4822 051 30152
3894 Res, 2k2, 5%, 1/16W. 4822 051 30222
3895 Res, 470R, 5%, 0,062W. 4822 051 30471
3896 Res, 1k5, 5%, 1/16W. 4822 051 30152
3897 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
3898 Res, 1k, 5%, 1/16W 4822 051 30102
4301 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4306 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4309 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4310 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4311 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4312 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4313 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4315 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4434 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4437 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4438 Res, Zero ohm, "Chip" Jumper 4822 051 20008
4827 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4828 Res, Zero ohm, "Chip" Jumper 4822 051 30008
4831 Res, 220 ohm, 5%, 1/16W. 4822 051 30221
5261 Coil, Fixed, 5U6, 10%. 4822 157 11778
5309 Coil, 680n 4822 157 71334
5332 Coil, 680n 4822 157 71334
5333 Coil, 680n 4822 157 71334
5334 Coil, 680n 4822 157 71334
5349 Coil, 820n 4822 157 71694
5350 Coil, 15u. 3198 018 61590
5351 Coil, 15u. 3198 018 61590
5401 Coil, 4u7. . . . . 2422 535 94637
5501 Coil, 680n 4822 157 71334
5816 Filter, L/C, BLM21A121SPT 4822 157 11506
5818 Filter, L/C, BLM21A121SPT 4822 157 11506
5827 Filter, L/C, BLM21A121SPT 4822 157 11506
5834 Filter, L/C, BLM21A121SPT 4822 157 11506
5839 Filter, L/C, BLM21A121SPT 4822 157 11506
5848 Filter, L/C, BLM21A121SPT 4822 157 11506
5849 Filter, L/C, BLM21A121SPT 4822 157 11506
5851 Filter, L/C, BLM21A121SPT 4822 157 11506
5853 Filter, L/C, BLM21A121SPT 4822 157 11506
6412 Diode, BAS316. . . . . 4822 130 11397
6415 Diode, BAS316. . . . . 4822 130 11397
6801 Diode, Reference, UZ3.9B 4822 130 11564
6802 Diode, Reference, UZ3.9B 4822 130 11564
6803 Diode, BAS316. . . . . 4822 130 11397
7201 Tuner, V+U PLL 2422 542 90115
7301 IC, TDA8887H/N1. . . . . 9352 638 72557
7305 Transistor, NPN, BC847BW 3198 010 42310
7307 Transistor, NPN, BC847BW 3198 010 42310
7331 Transistor, NPN, BC857BW 3198 010 42320
7337 Transistor, NPN, BC847BW 3198 010 42310
7368 Transistor, NPN, BC847BW 3198 010 42310
7385 Transistor, NPN, BC847BW 3198 010 42310
7386 Transistor, NPN, BC847BW 3198 010 42310
7401 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7402 IC, Digital, MOS, HEF4053BT. 5322 209 14481
7403 IC, Digital, MOS, M62320FP 4822 209 17345
7411 Transistor, NPN, BC847BW 3198 010 42310
7412 Transistor, NPN, BC847BW 3198 010 42310
7421 Transistor, NPN, BC857BW 3198 010 42320
7422 Transistor, NPN, BC857BW 3198 010 42320
7434 Transistor, BC369. . . . . 5322 130 44593
7438 Transistor, NPN, BC847BW 3198 010 42310
7501 IC, Digital, MOS, Z86130-12SSC 9322 147 01668
7801 IC, Digital, MOS DRAM, SAB9083H/N4 . . . 9352 639 83557
7802 IC, Analog Voltage/Current Regulator, LD1 117V33 . . . . . 9322 123 54687
7803 IC, TDA8601T/C1. . . . . 4822 209 12776
7804 IC, Digital, MOS, Standard Logic, 74HC1G32GW. 9352 457 50115
7805 Transistor, NPN, BC847BW 3198 010 42310
7806 Transistor, NPN, BC847BW 3198 010 42310
7807 Transistor, NPN, BC847BW 3198 010 42310
7808 Transistor, NPN, BC847BW 3198 010 42310
7809 Transistor, NPN, BC847BW 3198 010 42310
7810 Transistor, NPN, BC847BW 3198 010 42310
7824 Transistor, NPN, BC847BW 3198 010 42310
7828 Transistor, NPN, BC847BW 3198 010 42310
7832 Transistor, NPN, BC847BW 3198 010 42310
7871 Transistor, NPN, BC847BW 3198 010 42310
7874 Transistor, NPN, BC847BW 3198 010 42310
7876 Transistor, NPN, BC857BW 3198 010 42320
7891 Transistor, NPN, BC847BW 3198 010 42310
7892 Transistor, NPN, BC847BW 3198 010 42310
7893 Transistor, NPN, BC847BW 3198 010 42310
7894 Transistor, NPN, BC857BW 3198 010 42320
7895 Transistor, NPN, BC847BW 3198 010 42310

SSB Panel Parts

SSB Panel Parts
1001 Crystal Resonator, 6MHz, 20p 2422 543 89022
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1102 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1103 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1104 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1105 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1185 SSB Panel Assembly 3135 037 12471
1303 Connector, 5 Pin, M. 2422 025 16966
1304 Connector, 7 Pin, M. 2422 025 17104
1308 Crystal Resonator, 3.579545MHz., 16P, HC49/U A. 2422 543 01183
1401 Connector, V, 10 Pin,, F 2422 025 16729
S 1403 Fuse, 500mA, F, 50V. 2422 086 11092
1406 Filter, Ceramic, 4MHZ5, TPSCC*MB. . . . 2422 549 44043
1410 Filter, S.A.W. 45Mhz75 . . . . . 2422 549 44377
1411 Filter, Ceramic, 4.5Mhz. 2422 549 44534
1651 Crystal Resonator, 18.432MHz, 12P. . . . 2422 543 89019
1680 Connector, V, 6 Pin, M 2422 025 16961
1681 Connector, 3 Pin, V, M 2422 025 17103
1682 Connector, V, 10 Pin,, F 2422 025 16729
1683 Connector, V, 5 Pin, F 2422 025 16793
1702 Ceramic Resonator, 12MHz,, CSTCV 2422 540 98456
2001 Cap, 33p, 5%, 50V, Ceramic 3198 016 33390
2002 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2003 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2004 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2005 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2006 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2007 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2008 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2010 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2011 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2012 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2013 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2016 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2017 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2019 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2020 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2022 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2023 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2024 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2025 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2026 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2027 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2028 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2029 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2031 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2033 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2034 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2035 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2036 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290

S = Safety Part Be sure to use exact replacement part.

2037 Cap, 82p, 5%, 50V, Ceramic 3198 016 38290
2038 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2039 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2040 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2052 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2053 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2054 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2055 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2056 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2057 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2100 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2108 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2109 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2110 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2111 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2112 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 10n, 10%, 50V, Ceramic. 3198 017 01030
2312 Cap, 33n, 5%, 50V, Ceramic 2020 552 96659
2312 Cap, 33n, 5%, 16v, Ceramic 2222 781 11569
2340 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2342 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2351 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2356 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 3n3, 10%, 50V, Ceramic. 3198 017 33320
2361 Cap, 1p2, 21%, 50V, Ceramic. 3198 016 31280
2362 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2372 Cap, 1u, +80/-20%, 16V, Ceramic. 3198 017 21050
2373 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2374 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2375 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2376 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2377 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2378 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2384 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2388 Cap, 33n, 10%, 16V, Ceramic. 3198 017 33330
2389 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2390 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2391 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2394 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2395 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2396 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2397 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2399 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2401 Cap, 10n, 10%, 50V, Ceramic. 3198 017 31030
2404 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2405 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2413 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2418 Cap, 12p, 5%, 50V, Ceramic 3198 016 31290
2420 Cap, 150p, 5%, 50V, Ceramic. 3198 016 31510
2422 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2425 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2501 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2502 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2503 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2504 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2505 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2506 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2507 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2508 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2510 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2511 Cap, 1u, 10%, 16V, Ceramic 2020 552 96448
2512 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2513 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2515 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2520 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2521 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2522 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2523 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2524 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2525 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2526 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2528 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2529 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2530 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2549 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2550 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2552 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2553 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2554 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2555 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2562 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2563 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2564 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2565 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2566 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2567 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2568 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2569 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2570 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2571 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2574 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2575 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2576 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2577 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2578 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2579 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2582 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2583 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2584 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2585 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2586 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2590 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2592 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2593 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2594 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2595 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2609 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2610 Cap, 2n2, 10%, 50V, Ceramic. 3198 017 32220
2611 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2632 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2634 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2640 Cap, 220n, +80/-20%, 16V, Ceramic. . . . 3198 017 42240
2643 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2644 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2645 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2646 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2649 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2651 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2652 Cap, 47p, 5%, 50V, Ceramic 3198 016 34790
2653 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2654 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2659 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2660 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2661 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2662 Cap, 330n, +80/-20%, 25V, Ceramic. . . . 2222 910 19856
2663 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2664 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2665 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2666 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2667 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2668 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2670 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2673 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2674 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2677 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2678 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2679 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2680 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2681 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2682 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2686 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2687 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2690 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2691 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2693 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2694 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2695 Cap, 100u, 20%, 16V, Electrolytic. . . . 3198 030 41010
2697 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2698 Cap, 2u2, +80/-20%, 10V, Ceramic 3198 017 22250
2709 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2710 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2711 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2712 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2713 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2714 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2716 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2718 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2719 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2720 Cap, 15p, 5%, 50V, Ceramic 3198 016 31590
2721 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2722 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2728 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2729 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

S = Safety Part Be sure to use exact replacement part.

2730 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2731 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2740 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2741 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2742 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2743 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2744 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2745 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2746 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2747 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2748 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2749 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2750 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2751 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 22n, 10%, 25V, Ceramic. 3198 017 32230
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2763 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2765 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2766 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2767 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2768 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2771 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2772 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2774 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2776 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2777 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2778 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2779 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2780 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2781 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2782 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2784 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2785 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2786 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2787 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2788 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2789 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2790 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2791 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2792 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2793 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2794 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2795 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2796 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2797 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2798 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2799 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2800 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2801 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2802 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2803 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2805 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2807 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2809 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2810 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2811 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2812 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2813 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2817 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2819 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2820 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2821 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2826 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2829 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2831 Cap, 68p, 5%, 50V, Ceramic 3198 016 36890
2832 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2833 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2835 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2836 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2838 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2843 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2845 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2846 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2847 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2848 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2851 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2859 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2861 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2864 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2865 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2866 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2867 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2870 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2871 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2872 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2874 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2875 Cap, 10u, 20%, 16V, Electrolytic 2020 021 91854
2876 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2880 Cap, 100u, 20%, 16V, Electrolytic. . . . 2020 021 91856
2881 Cap, 27p, 5%, 50V, Ceramic 3198 016 32790
2884 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2899 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2908 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2909 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2910 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2911 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2912 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
3001 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3002 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3003 Res, 24K, 1%, 1/16W, Metalized Glass . . 2322 704 62403
3006 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3007 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3008 Res, Network, 4x220 ohm, 5%. 3198 031 12210
3009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3011 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3012 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3013 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3014 Res, 6K8, 5%, 1/16W, Metalized Glass . . 3198 021 36820
3015 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3016 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3017 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3018 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3019 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3020 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3021 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3024 Res, 27K, 5%, 1/16W, Metalized Glass . . 3198 021 32730
3025 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3026 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3027 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3029 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3031 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3033 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3034 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3035 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3039 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3040 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3041 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3042 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3044 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3045 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3046 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3048 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3049 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3050 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3051 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3052 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3053 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3054 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3055 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3056 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3057 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2120 108 93902
3059 Res, 620 ohm, 1%, 1/16W, Metalized Glass 2322 704 66201
3061 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3062 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3064 Res, Network, 4x100 ohm, 5%. 3198 031 11010
3065 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3066 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3067 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3068 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3069 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3073 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3074 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3076 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3078 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3079 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3080 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3081 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3088 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720

S = Safety Part Be sure to use exact replacement part.

3090 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3093 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3094 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3095 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3096 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3097 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3098 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3099 Res, Network, 4x470 ohm, 5%. 3198 031 14710
3169 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3170 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3171 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3172 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3173 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3174 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3176 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3180 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3181 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3182 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3183 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3184 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3185 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3186 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3187 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3188 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3189 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3304 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3308 Res, 470K, 5%, 1/10W, Metalized Glass. . 3198 021 54740
3324 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3329 Res, 6R8, 5%, 1/8W, Metalized Glass. . . 2322 750 66808
3330 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3332 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3335 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3355 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3360 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3370 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3371 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3372 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3376 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3377 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3378 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3382 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3385 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3387 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3393 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3395 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3396 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3397 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3398 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3400 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3401 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3402 Res, 3R9, 5%, 1/8W, Metalized Glass. . . 2322 750 63908
3403 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3404 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3405 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3408 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3415 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3418 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3419 Res, 390 ohm, 5%, 1/16W, Metalized Glass 3198 021 33910
3420 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3436 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3437 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3439 Res, 1K5, 5%, 1/16W, Metalized Glass . . 3198 021 31520
3441 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3444 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3446 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3447 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3448 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3449 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3456 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3457 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3463 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3467 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3470 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3471 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3473 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3500 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3501 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3504 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3505 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3506 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
3509 Res, 12K, 5%, 1/16W, Metalized Glass . . 3198 021 31230
3510 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3511 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3512 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3513 Res, 270K, 5%, 1/16W, Metalized Glass. . 2322 702 60274
3514 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3515 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3516 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3519 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3521 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3522 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3523 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3524 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3525 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3526 Res, 1M, 5%, 1/16W, Metalized Glass. . . 3198 021 31050
3527 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3529 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3530 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3531 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3532 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3533 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3540 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3546 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3554 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3558 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3559 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3560 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3561 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3562 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3563 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3564 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3567 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3570 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3571 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3572 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3573 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3574 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3575 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3576 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3577 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3578 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3579 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3614 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3615 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3624 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3626 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3627 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3628 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3630 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3634 Res, 120 ohm, 5%, 1/16W, Metalized Glass 3198 021 31210
3636 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3637 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3639 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3640 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3641 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3642 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3643 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3644 Res, 4R7, 5%, 1/8W, Metalized Glass. . . 2322 750 64708
3653 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3654 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3658 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3666 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3667 Res, 82K, 5%, 1/16W, Metalized Glass . . 3198 021 38230
3668 Res, 56K, 5%, 1/16W, Metalized Glass . . 3198 021 35630
3669 Res, 270 ohm, 5%, 1/16W, Metalized Glass 3198 021 32710
3670 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3671 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3693 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
3698 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3699 Res, 180K, 5%, 1/16W, Metalized Glass. . 2322 702 60184
3709 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3710 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3711 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3712 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3713 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3714 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3715 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3716 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3717 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3718 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040
3719 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3720 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3725 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3726 Res, 1K2, 5%, 1/16W, Metalized Glass . . 3198 021 31220
3727 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3728 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3730 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3736 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3737 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3738 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3739 Res, 15K, 5%, 1/16W, Metalized Glass . . 3198 021 31530
3740 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3741 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3742 Res, 18K, 5%, 1/16W, Metalized Glass . . 3198 021 31830
3744 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220

S = Safety Part Be sure to use exact replacement part.

3745 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3746 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3747 Res, 150K, 5%, 1/16W, Metalized Glass. . 3198 021 31540
3748 Res, 220K, 5%, 1/16W, Metalized Glass. . 3198 021 32240
3749 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3750 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3751 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3752 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3753 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3754 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3755 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3756 Res, 8K2, 5%, 1/16W, Metalized Glass . . 3198 021 38220
3757 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3758 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3759 Res, 220 ohm, 5%, 1/16W, Metalized Glass 3198 021 32210
3762 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3763 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3764 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3771 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3772 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3773 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3774 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3781 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3782 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3783 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3792 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3793 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3794 Res, 15 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31590
3795 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3804 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
5150 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5151 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5152 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5153 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5154 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5155 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5305 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5306 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5307 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5308 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5309 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5310 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5311 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5402 Coil, 8u2. . . . . 3198 018 38280
5404 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5405 Inductor, Fixed, EMI, 120 ohm@100MHz . . 2422 535 95427
5406 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5408 IND VAR SM 5CCB 91MHZ PM R 2422 549 44875
5409 IND FXD 0603 EMI 100MHZ 120R R 2422 549 42893
5409 Inductor, Fixed, 100MHz, 120R 2422 549 42896
5411 Coil, 330n 3198 018 33370
5415 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5416 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5417 Coil, 33u. 3198 018 33390
5651 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5652 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5653 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5654 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5655 Coil, 22u. 3198 018 32290
5656 Coil, 6u8. . . . . 3198 018 36880
5657 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5658 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5659 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5660 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5661 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5662 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5663 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5664 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5665 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5666 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5667 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5668 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
5669 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5670 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5671 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5672 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5706 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5707 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5710 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5711 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5712 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5713 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5714 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5716 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5717 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5718 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5719 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5721 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90080
5722 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5724 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5726 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5727 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5728 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5729 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5731 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5736 Coil, 6u8. . . . . 3198 018 36880
5737 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5738 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5742 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5743 Inductor, Fixed, 1k ohm@100MHz,. 3198 018 90090
5744 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5900 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5901 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5902 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5903 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5904 Inductor, Fixed, 100MHz, 30 ohm. 3198 018 90060
5910 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5911 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5912 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5913 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5914 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5915 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5917 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5918 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5919 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
5920 Inductor, Fixed, 100MHz, 600 ohm 3198 018 90040
6001 Diode, Signal, BAT54 . . . . . 3198 010 10660
6002 Diode, Signal, BAS316. . . . . 3198 010 10630
6003 Diode, Signal, BAT54 . . . . . 3198 010 10660
6004 Diode, Signal, BAT54 . . . . . 3198 010 10660
6005 Diode, Regulator, PLVA2650A. 9340 309 70215
6320 Diode, Signal, BAS316. . . . . 3198 010 10630
6321 Diode, Signal, BAS316. . . . . 3198 010 10630
6322 Diode, Signal, BAS316. . . . . 3198 010 10630
6652 Zener Diode, 10V 3198 020 51090
6657 Zener Diode, 2.7 volt. 9340 548 43115
6658 Diode, Signal, BAS316. . . . . 3198 010 10630
6926 Zener Diode, 8.2V. 3198 020 58280
6956 Zener Diode, 8.2V. 3198 020 58280
6957 Zener Diode, 8.2V. 3198 020 58280
7001 IC, TV System Controller, QFP120, SAA5801 H/015. . . . . 9352 684 81557
7002 Transistor, NPN, BC857BW 3198 010 42320
7003 Transistor, NPN, BC847BW 3198 010 42310
7004 Transistor, NPN, BC847BW 3198 010 42310
7005 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7006 IC, CMOS Flash Memory, TC58FVM5T2ATG65 . 9322 194 83671
7007 IC, CMOS 16 Bit Dynamic RAM, MSM51V18165F 9322 157 20668
7007 IC, CMOS 16-Bit Dynamic RAM, IS41LV16100 9322 200 55668
7008 Transistor, NPN, BC847BW 3198 010 42310
7009 Transistor, NPN, BC847BW 3198 010 42310
7010 Transistor, NPN, BC857BW 3198 010 42320
7011 IC, M24C32-WMN6. . . . . 9322 124 74668
7013 Transistor, NPN, BC847BW 3198 010 42310
7014 Transistor, NPN, BC857BW 3198 010 42320
7015 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7016 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7100 IC, 3.3V Prog. LVDS Transmitter, DS90C385 9322 159 45668
7305 Transistor, NPN, BC847BW 3198 010 42310
7312 Transistor, NPN, PDTC144EU 3198 010 44330
7320 Transistor, NPN, BC847BW 3198 010 42310
7322 Transistor, NPN, BC847BW 3198 010 42310
7323 IC, IIC-Bus Controlled TV Processor. . . 9352 625 24518
7375 Transistor, NPN, BC847BW 3198 010 42310
7402 Transistor, NPN, BC847BW 3198 010 42310
7404 Transistor, NPN, BC847BW 3198 010 42310
7408 Transistor, PNP, BC857B. 3198 010 42150
7409 Transistor, PNP, BC857B. 3198 010 42150
7410 Transistor, NPN, BC847BW 3198 010 42310
7411 Transistor, NPN, BC847B. 3198 010 42030
7651 IC, Multi-standard Sound Processor, MSP34 21G. 9322 183 23671
7654 Transistor, NPN, BC847BS 9340 425 20115
7664 Transistor, NPN, BC847BPN. 9340 425 30115
7665 Transistor, NPN, BC847BPN. 9340 425 30115
7666 Transistor, NPN, BC847BPN. 9340 425 30115
7668 Transistor, NPN, BC857BW 3198 010 42320
7674 Transistor, NPN, BC847BW 3198 010 42310
7675 Transistor, NPN, BC847BS 9340 425 20115
7678 Transistor, NPN, BC847BS 9340 425 20115
7679 Transistor, NPN, BC847BS 9340 425 20115
7681 IC, LP/LN Operational Amplifier. 9322 060 73668
7682 Transistor, NPN, BC847B. 3198 010 42030
7706 IC, Digital, LF25CDT 9322 142 88668
7706 IC, Voltage Regulator w/Inhibit. 9322 164 71668
7707 Transistor, NPN, BC847B. 3198 010 42030
7708 Transistor, NPN, BC847B. 3198 010 42030
7709 Transistor, NPN, BC847B. 3198 010 42030
7710 Transistor, NPN, BC847B. 3198 010 42030
7711 IC Socket, 32 Pin, V, F. 2422 486 80938
7711 IC, 512 Kbit EPOM, M27C512 . . . . . 9322 127 85668
7712 IC, Octal D-type Transparent Latch . . . 9351 870 00118

S = Safety Part Be sure to use exact replacement part.

7713 IC, PICNIC, SAA4978H 9352 688 09557
7714 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7715 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7717 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7718 IC, Field/Line Rate Converter, SAA4993H. 9352 695 58557
7719 IC, 3M-bit FIFO Memory, MSM54V12222B . . 9322 183 81668
7722 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7723 IC, (2) 2Mbit FIFO Memory, MS81V04160A-25 TB. 9322 192 96702
7724 IC, EAGLE - Video Enhancment Processor, T 8F24EF 9322 188 08702
7725 Transistor, NPN, PMBT2369. . . . . 3198 010 43360
7726 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7727 IC, Low Drop Volt. Reg. w/Inhibit, LF15AB DT. 9322 170 14668
7734 IC, Inverter, LVLP, 74LVC1G04. . . . . 3198 010 70390
7735 IC, D-type flip-flop, 74LVC1G79. . . . . 9352 686 75125
9008 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9009 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9010 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9011 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9012 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9013 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9014 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9302 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9303 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9304 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9313 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9322 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9401 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9403 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9406 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9407 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9410 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9413 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9414 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9416 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9417 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9520 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9522 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9603 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9604 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9610 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9611 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9632 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9642 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9645 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9676 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9677 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9682 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9683 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9684 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9685 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9686 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9687 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9688 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9689 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9691 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9692 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9702 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9703 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9704 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9712 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9714 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9716 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9717 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9718 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9719 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9721 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9723 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9725 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9729 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9731 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9733 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9735 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9739 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9740 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9741 Res, Network, 4x10 ohm, 5% 3198 031 11090
9744 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9754 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9760 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9761 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9763 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9764 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9768 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9769 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9901 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9902 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9903 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9904 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9905 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9906 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9907 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9908 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9909 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9919 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9920 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9921 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9925 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9927 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9928 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9929 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9935 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9937 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9938 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9939 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9944 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9945 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9946 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9947 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9948 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9949 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9950 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9951 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9952 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9953 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
9954 Res, Zero ohm, 'Chip' Jumper 3198 021 90030

Scaler Board MSB Panel

Scaler Board MSB Panel
0300 Connector, 64 Pin, BM, M 2422 025 17714
0303 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0305 Socket, DVI Connector, H, 24 Pin, F. . . 2422 033 00484
0308 Phono Jack Board, 4 Plugs, Red & White . 2422 026 05422
0310 Sub-D Connector, 15 Pin, BM, F 2422 025 17027
0311 Phono Jack Board, 6 Plugs, Red , Blue, Green 2422 026 05421
0315 Connector, 5 Pin, M, IDE 2422 025 17931
1100 Connector, V, F, 16 Pin. 2422 025 17202
1101 Connector, 4 Pin 2422 025 12479
1105 Connector, 10 Pin, V, M. 2422 021 98888
1106 Connector, 10 Pin, V, M. 2422 021 98888
1152 Scaler Board MSB Panel Assembly. 3122 357 22272
1300 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1301 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1302 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1303 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1401 Connector, V, 10 Pin,, F 2422 025 16729
1501 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1502 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1503 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1504 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1505 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1700 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1701 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1702 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
1703 Filter, 50V, 67 ohm @ 100MHz 2422 549 45325
2101 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2102 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2103 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2104 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2105 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2106 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2107 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2108 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2109 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2110 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2111 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2121 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2122 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2138 Cap, 220p, 5%, 50V, Ceramic. 3198 016 32210
2139 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2151 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2152 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2153 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2154 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2155 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2156 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2157 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2158 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2159 Cap, 4p7, 5%, 50V, Ceramic 3198 016 34780
2160 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2161 Cap, 100u, 20%, 6.3V, Electrolytic . . . 2020 012 93793
2170 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2171 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2172 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2173 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2174 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040

2175 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2176 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2177 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2178 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2179 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2180 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2181 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2182 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2183 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2184 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2185 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2186 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2187 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2188 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2189 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2190 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2191 Cap, 68n, 10%, 16V, Ceramic. 3198 017 36830
2192 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2194 Cap, 470n, +80/-20%, 10V, Ceramic. . . . 3198 017 44740
2195 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2196 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2197 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2198 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2199 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2200 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2225 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2226 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2227 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2228 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2229 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2230 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2231 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2232 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2233 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2234 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2235 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2236 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2237 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2238 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2240 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2241 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2242 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2243 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2244 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2245 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2246 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2247 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2248 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2249 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2255 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2260 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2261 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2262 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2263 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2267 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2295 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2296 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2297 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2298 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2299 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2300 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2302 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2303 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2304 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2305 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2306 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2307 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2308 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2309 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2311 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2312 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2314 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2315 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2316 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2317 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2318 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2319 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2320 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2321 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2322 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2323 Cap, 3p3, 8%, 50V, Ceramic 3198 016 33380
2345 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2346 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2347 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2348 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2349 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2350 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2352 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2354 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2355 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2357 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2358 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2359 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2360 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2361 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2362 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2363 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2364 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2365 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2366 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2367 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2368 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2369 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2370 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2371 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2372 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2373 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2374 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2375 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2377 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2378 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2379 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2380 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2381 Cap, 47n, 10%, 16V, Ceramic. 3198 017 34730
2382 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2383 Cap, 3n9, 10%, 50V, Ceramic. 2020 552 96428
2384 Cap, 39n, 10%, 50V, Ceramic. 2238 580 15644
2385 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2386 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2405 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2406 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2408 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2409 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2411 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2412 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2413 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2414 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2415 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2416 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2417 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2418 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2419 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2420 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2421 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2423 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2431 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2432 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2433 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2434 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2435 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2436 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2437 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2438 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2439 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2440 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2441 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2443 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2444 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2445 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2446 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2447 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2448 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2492 Cap, 18p, 5%, 50V, Ceramic 3198 016 31890
2493 Cap, 1u, +80/-20%, 10V, Ceramic. 3198 017 41050
2494 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2495 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2497 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2502 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2535 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2536 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2538 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2539 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2540 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2541 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2542 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2543 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2548 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2550 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2582 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2583 Cap, 270p, 5%, 50V, Ceramic. 3198 016 32710
2584 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2585 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2586 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2587 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2588 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2590 Cap, 470p, 2%, 50V, Ceramic. 2238 867 14471
2593 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2594 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2595 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2596 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2598 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2599 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2600 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2633 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290

S = Safety Part Be sure to use exact replacement part.

2634 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2635 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2659 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2660 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2664 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2665 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2666 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2667 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2669 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2670 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2671 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2672 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2710 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2712 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2713 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2714 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2715 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2716 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2718 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2720 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2722 Cap, 47u, 20%, 16V, Electrolytic 3198 030 44790
2724 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2725 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2726 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2727 Cap, 22p, 5%, 50V, Ceramic 3198 016 32290
2730 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2732 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2733 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2734 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2735 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2736 Cap, 22u, 20%, 16V, Electrolytic 3198 030 42290
2737 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2752 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2753 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2754 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2755 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2756 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2757 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2759 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2760 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2761 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2762 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2764 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2766 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2767 Cap, 10p, 5%, 50V, Ceramic 3198 016 31090
2769 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2770 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2771 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2772 Cap, 100p, 5%, 50V, Ceramic. 3198 016 31010
2773 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2775 Cap, 470p, 5%, 50V, Ceramic. 3198 016 34710
2780 Cap, 10u, 20%, 16V, Electrolytic 3198 030 41090
2781 Cap, 1n, 5%, 25V, Ceramic. 3198 016 31020
2790 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2820 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2821 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2822 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2823 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2824 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2825 Cap, 1n5, 10%, 50V, Ceramic. 3198 017 31520
2826 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2827 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2830 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2831 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2832 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2833 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2850 Cap, 4u7, 10%, 10V, Ceramic. 2022 552 05618
2851 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2852 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2853 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2854 Cap, 1n, 10%, 50V, Ceramic 3198 017 31020
2855 Cap, 6n8, 10%, 50V, Ceramic. 3198 017 36820
2856 Cap, 15n, 10%, 50V, Ceramic. 3198 017 31530
2857 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2860 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2861 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2862 Cap, 4n7, 10%, 50V, Ceramic. 3198 017 34720
2863 Cap, 220n, 10%, 10V, Ceramic 3198 017 32240
2870 Cap, 4u7, 10%, 6.3V, Ceramic 2022 552 05616
2871 Cap, 1u, 10%, 10V, Ceramic 2020 552 96372
2882 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2883 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2886 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2888 Cap, 100n, 10%, 16V, Ceramic 3198 017 31040
2896 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
2897 Cap, 470p, 10%, 50V, Ceramic 3198 017 34710
3106 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3107 Res, 39K, 5%, 1/16W, Metalized Glass . . 3198 021 33930
3108 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3109 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3110 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3111 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3112 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3113 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3114 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3115 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3116 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3120 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3121 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3122 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3123 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3124 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3134 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3135 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3137 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3138 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3139 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3151 Res, 33 ohm, 5%, 1/16W, Metalized Glass. 3198 021 33390
3152 Res, 180 ohm, 5%, 1/16W, Metalized Glass 3198 021 31810
3153 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3156 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3157 Res, 150 ohm, 1%, 1/16W, Metalized Glass 2322 704 61501
3158 Res, 75 ohm, 5%, 1/16W, Metalized Glass. 3198 021 37590
3173 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3175 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3176 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3180 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3181 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3182 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3183 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3184 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3185 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3186 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3187 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3188 Res, 68 ohm, 5%, 1/16W, Metalized Glass. 3198 021 36890
3198 Res, 1 ohm, 5%, 1/16W, Metalized Glass . 3198 021 31080
3220 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3221 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3260 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3261 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3262 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3263 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3264 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3265 Res, 3K9, 5%, 1/16W, Metalized Glass . . 3198 021 33920
3266 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3302 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3303 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3304 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3306 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3345 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3346 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3347 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3348 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3349 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3350 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3351 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3352 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3405 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3406 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3407 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3408 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3409 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3410 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3411 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3412 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3413 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3414 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3415 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3416 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3420 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3422 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3423 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3425 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3426 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3427 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3428 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3434 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3435 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3436 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3437 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3438 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3440 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3441 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3444 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3445 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3447 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3448 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3449 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3450 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3451 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3452 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3455 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3456 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3484 Res, 100K, 5%, 1/16W, Metalized Glass. . 3198 021 31040

S = Safety Part Be sure to use exact replacement part.

3485 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3486 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3487 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3488 Res, 470K, 5%, 1/16W, Metalized Glass. . 3198 021 34740
3489 Res, 4R7, 5%, 1/16W, Metalized Glass . . 3198 021 34780
3490 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3492 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3497 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3498 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3499 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3500 Res, 150 ohm, 5%, 1/16W, Metalized Glass 3198 021 31510
3505 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3506 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3507 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3508 Res, 3K3, 5%, 1/16W, Metalized Glass . . 3198 021 33320
3511 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3512 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3535 Res, Network, 4x47 ohm, 5% 3198 031 14790
3536 Res, Network, 4x47 ohm, 5% 3198 031 14790
3537 Res, Network, 4x47 ohm, 5% 3198 031 14790
3538 Res, Network, 4x47 ohm, 5% 3198 031 14790
3539 Res, Network, 4x47 ohm, 5% 3198 031 14790
3540 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3541 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3542 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3543 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3544 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3581 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3582 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3583 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3584 Res, 22 ohm, 5%, 1/16W, Metalized Glass. 3198 021 32290
3585 Res, 22K, 5%, 1/16W, Metalized Glass . . 3198 021 32230
3586 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3587 Res, 47K, 1%, 1/16W, Metalized Glass . . 2322 704 64703
3588 Res, 330K, 5%, 1/16W, Metalized Glass. . 3198 021 33340
3589 Res, 680K, 5%, 1/16W, Metalized Glass. . 3198 021 36840
3590 Res, 560 ohm, 5%, 1/16W, Metalized Glass 3198 021 35610
3591 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3593 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3595 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3597 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3598 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3599 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
3603 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3604 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3605 Res, 47K, 5%, 1/16W, Metalized Glass . . 3198 021 34730
3606 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3630 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3631 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3633 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3634 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3635 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3636 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3649 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3651 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3653 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3654 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3655 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3656 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3657 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3666 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3667 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3668 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3669 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3670 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3673 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3674 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3675 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3676 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3677 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3710 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3711 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3713 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3714 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3715 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3716 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3717 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3718 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3720 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3721 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3722 Res, 75 ohm, 5%, 1/10W, Metalized Glass. 3198 021 57590
3725 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3726 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3727 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3730 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3731 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3732 Res, 47 ohm, 5%, 1/16W, Metalized Glass. 3198 021 34790
3733 Res, 470 ohm, 5%, 1/16W, Metalized Glass 3198 021 34710
3745 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3746 Res, Network, 4x47 ohm, 5% 3198 031 14790
3747 Res, Network, 4x47 ohm, 5% 3198 031 14790
3748 Res, Network, 4x47 ohm, 5% 3198 031 14790
3749 Res, Network, 4x47 ohm, 5% 3198 031 14790
3750 Res, Network, 4x47 ohm, 5% 3198 031 14790
3751 Res, Network, 4x47 ohm, 5% 3198 031 14790
3752 Res, Network, 4x47 ohm, 5% 3198 031 14790
3753 Res, Network, 4x47 ohm, 5% 3198 031 14790
3754 Res, Network, 4x47 ohm, 5% 3198 031 14790
3755 Res, Network, 4x47 ohm, 5% 3198 031 14790
3756 Res, Network, 4x47 ohm, 5% 3198 031 14790
3757 Res, Network, 4x47 ohm, 5% 3198 031 14790
3758 Res, Network, 4x47 ohm, 5% 3198 031 14790
3760 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3761 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3767 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3768 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3769 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3770 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3777 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3779 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3781 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3782 Res, 33K, 5%, 1/16W, Metalized Glass . . 3198 021 33330
3790 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3792 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3797 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3798 Res, 100 ohm, 5%, 1/16W, Metalized Glass 3198 021 31010
3799 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3801 Res, 4K7, 5%, 1/16W, Metalized Glass . . 3198 021 34720
3820 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3821 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3826 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3828 Res, 390 ohm, 1%, 1/16W, Metalized Glass 2322 704 63901
3829 Res, 10K, 5%, 1/16W, Metalized Glass . . 3198 021 31030
3830 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3831 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3832 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3850 Res, 10 ohm, 5%, 1/16W, Metalized Glass. 3198 021 31090
3851 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3856 Res, 2K7, 5%, 1/16W, Metalized Glass . . 3198 021 32720
3858 Res, 1K5, 1%, 1/16W, Metalized Glass . . 2322 704 61502
3860 Res, 1K, 1%, 1/16W, Metalized Glass. . . 2322 704 61002
3861 Res, 1K, 5%, 1/16W, Metalized Glass. . . 3198 021 31020
3862 Res, 680 ohm, 5%, 1/16W, Metalized Glass 3198 021 36810
3870 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3871 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3872 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3873 Res, 120 ohm, 1%, 1/16W, Metalized Glass 2322 704 61201
3999 Res, 2K2, 5%, 1/16W, Metalized Glass . . 3198 021 32220
4105 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4106 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4110 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4111 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4267 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4349 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4485 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4650 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4652 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4747 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4762 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4765 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4778 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4780 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4793 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4890 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
4891 Res, Zero ohm, 'Chip' Jumper 3198 021 90030
4892 Res, Zero ohm, 'Chip' Jumper 3198 021 90020
5107 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5160 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5164 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5165 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5166 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5170 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5195 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5225 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5240 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5255 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5260 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5295 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5296 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5297 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5345 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5346 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5347 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5348 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5405 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5406 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5408 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5411 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5486 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5488 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5535 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5536 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5539 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5581 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769

S = Safety Part Be sure to use exact replacement part.

5582 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5583 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5584 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5585 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5633 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5710 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5711 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5712 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5715 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5724 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5746 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5747 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5749 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5751 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5780 Ferrite Bead, 30 ohm@100MHz. 2422 549 43769
5830 Coil, 22u. 2422 535 95278
5860 Coil, 22u. 2422 535 95278
5890 Coil, 22u. 2422 535 95278
5892 Coil, 22u. 2422 535 95278
6220 Diode, Signal, BAV99 . . . . . 3198 010 10620
6221 Diode, Signal, BAV99 . . . . . 3198 010 10620
6405 Diode, Signal, BAT54 . . . . . 3198 010 10660
6485 Diode, Signal, BAT54 . . . . . 3198 010 10660
6581 Diode, Signal, BAS316. . . . . 3198 010 10630
6630 Zener Diode, 6.8V. 3198 020 56880
6631 Zener Diode, 6.8V. 3198 020 56880
6632 Zener Diode, 6.8V. 3198 020 56880
6633 Zener Diode, 33V 3198 020 53390
6634 Zener Diode, 33V 3198 020 53390
6635 Zener Diode, 33V 3198 020 53390
6636 Zener Diode, 33V 3198 020 53390
6637 Zener Diode, 6.8V. 3198 020 56880
6638 Zener Diode, 6.8V. 3198 020 56880
6639 Zener Diode, 6.8V. 3198 020 56880
6640 Zener Diode, 6.8V. 3198 020 56880
6641 Zener Diode, 6.8V. 3198 020 56880
6642 Zener Diode, 6.8V. 3198 020 56880
6643 Zener Diode, 6.8V. 3198 020 56880
6710 Zener Diode, 6.8V. 3198 020 56880
6711 Zener Diode, 6.8V. 3198 020 56880
6712 Zener Diode, 6.8V. 3198 020 56880
6745 Diode, Signal, BAV99 . . . . . 3198 010 10620
6746 Diode, Signal, BAV99 . . . . . 3198 010 10620
6747 Diode, Signal, BAV99 . . . . . 3198 010 10620
6748 Diode, Signal, BAV99 . . . . . 3198 010 10620
6749 Diode, Signal, BAV99 . . . . . 3198 010 10620
6750 Diode, Signal, BAV99 . . . . . 3198 010 10620
6751 Zener Diode, 6.8V. 3198 020 56880
6752 Zener Diode, 6.8V. 3198 020 56880
6753 Diode, Signal, BAV99 . . . . . 3198 010 10620
6754 Diode, Signal, BAV99 . . . . . 3198 010 10620
6755 Diode, Signal, BAS316. . . . . 3198 010 10630
6756 Diode, Signal, BAS316. . . . . 3198 010 10630
6757 Zener Diode, 33V 3198 020 53390
6758 Zener Diode, 33V 3198 020 53390
6759 Zener Diode, 33V 3198 020 53390
6760 Zener Diode, 33V 3198 020 53390
6761 Zener Diode, 6.8V. 3198 020 56880
6820 Diode, Signal, BAS316. . . . . 3198 010 10630
6830 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
6850 Diode, Signal, BAS316. . . . . 3198 010 10630
6860 Diode, Rect, PRLL5819 . . . . . 9339 680 20115
7107 IC, 2 Ch. IIC Multiplexer, PCA9540 . . . 9352 666 74118
7120 IC, Prog. Gate Array, EP1C6Q240C8. . . . 9322 196 44671
7137 IC, Volt Det. w/Prog. Delay, NCP303LS09. 9322 186 29685
7160 IC, Adj. Pos. Volt. Reg., LD1117DT33 . . 9322 134 45668
7170 IC, 140 MSPS Analog Interface, AD9883A . 9322 181 72671
7195 IC, 100 MSPS, 3V A/D Converter, AD9283 . 9322 197 13668
7255 IC, Serial Conf. Flash Memory, 1Mbit, EPC S1. . . . . 9322 196 51682
7260 IC, Serial Conf. f/APEX & FLEX Dev., EPC2 9322 141 53682
7295 IC, Digital Transmitter, SII160CT100 . . 9322 171 04671
7345 IC, 205 MSPS Analog FP Interface, AD9888 9322 179 30671
7346 IC, Adj. Pos. Voltage Regulator. 9322 116 74668
7347 IC, Quad Buffer/Driver, 74LVC125AD . . . 9352 317 00118
7405 IC, M24C32-WMN6. . . . . 9322 124 74668
7406 IC, 64k x 16-bit Static RAM, CY62126BV . 9322 164 75682
7407 IC, PW181 Image Processor, PW181-10Q . . 9322 184 01671
7409 IC, 16Mbit, 3V Flash Memory, M29W160ET . 9322 194 74668
7411 Crystal Oscillator, 14.31818MHz, FXO-34FL 2722 171 08787
7484 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7486 Transistor, NPN, BC847BW 3198 010 42310
7487 Transistor, NPN, BC847BW 3198 010 42310
7490 Transistor, NPN, BC847BW 3198 010 42310
7491 Transistor, NPN, BC847BW 3198 010 42310
7494 IC, Prog. Shunt Volt. Ref., TS431. . . . 9322 192 16685
7537 IC, LVDS Receiver to 24bit Conv., DS90CF386. . . . . 9322 164 41668
7581 IC, Dual Retrig. Mono Multivibrator, 74HCT4538. . . . . 9337 153 90118
7582 Transistor, NPN, BC847BW 3198 010 42310
7583 IC, Video Sync Separator, LM188. . . . . 9322 005 78668
7589 IC, Triple 2 Ch. Analog Multiplex/Demultiplexer 9337 153 20118
7592 IC, Ultra Fast Comparator, TL3016. . . . 9322 125 63668
7593 IC, Hex Inverting Schmitt-trigger, 74LVC14A. 9352 607 39118
7594 Transistor, NPN, BC847BW 3198 010 42310
7633 IC, Serial EEPROM. 9322 046 99668
7710 IC, Wide Band Analog Switch, M52758FP. . 9322 185 90668
7715 Transistor, NPN, BC847BW 3198 010 42310
7716 Transistor, NPN, BC847BW 3198 010 42310
7717 Transistor, NPN, BC847BW 3198 010 42310
7725 Transistor, NPN, BC847BW 3198 010 42310
7746 IC, HDCP PanelLink Receiver, SII169CT100 9322 185 79668
7747 IC, Serial EEPROM. 9322 046 99668
7749 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7750 Transistor, N-Ch. Enhancement FET. . . . 9339 663 40215
7820 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7830 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7850 IC, Adj. Step Down PWM Controller, L6910 9322 182 77668
7860 Transistor, Dual N-Ch. MOSFET, SI4936ADY 9322 160 70668
7870 IC, Adj. Pos. Volt. Reg., LD1117DT . . . 9322 144 97668

Cabinet & Accessory Parts

0005 System Cooling Fan Assembly. 3135 037 71361
0009 Cable, Thermal Sw. 2 Pin, 600mm. 3135 038 70071
0010 Roller Switch, f/Light Engine Lamp Door. 3135 038 40011
0016 Lamp, Light Engine 3122 438 71310
0017 Light Engine Asm., 1.18" D62 XION 1.05 . 3122 437 11491
0018 Bracket, Light Engine. 3135 034 01923
0019 Screen, Lenticular, LCoS 62W 3135 033 20541
0020 Screen, Fresnel, LCoS 62W. 3135 033 20531
0021 Mirror, 62 LCOS. 3135 034 90181
0023 Shield, Light, 62W 3135 034 04252
0024 Stud, Adjusting, f/Light Engine (3 used) 3135 030 40281
0025 Bracket, Adjust. 3135 031 10021
0030 Cabinet Front Asm., LCoS, 62W. 3135 037 54611
0032 Cabinet Top, 62W 3135 037 54691
0034 Upper Backcover, 62W 3135 037 54631
0036 Lower Backcover, 62W 3135 037 54651
0038 Cabinet Base, 62W. 3135 034 04391
0039 Baffle, Speaker. 3135 037 54671
0065 Philips Wordmark 3135 030 00491
0066 Overlay f/Control Housing. 3135 030 00411
0067 Label, Rear Jack Panel 3135 037 54291
0071 Label, Rear Center Channel Sw. 3135 030 00361
0075 Vertical Rail, Left Side, LCoS 62W . . . 3135 031 20551
0076 Vertical Rail, Right Side, LCoS 62W. . . 3135 031 20561
0077 Rail, Screen, Horizontal, LCoS 62W (2 used). 3135 031 20572
0081 Frame f/Mirror 62W 3135 034 04231
0088 Bracket f/Back Support 62W LCoS (2 used) 3135 031 20541
0090 Bracket Left, Cabinet Support. 3135 031 20274
0091 Bracket Right, Cabinet Support 3135 031 20264
0092 Rail Support Bracket, LCoS 62W 3135 031 20582
0093 Support Bracket, Back, 62W LCoS. 3135 031 20601
0096 Door, Lamp Access. 3135 034 04271
0098 Filter Assembly. 3135 037 51811
0106 Rail, System Asm. Left 3135 031 20332
0107 Rail, System Asm. Right. 3135 031 20342
0124 Frame f/Control Housing. 3135 037 51871
0127 Frame, f/Side Jack Panel 3135 037 54211
0132 Frame, f/LED Sensor Panel. 3135 034 01872
0167 Documentation, Quick Use Guide, English. 3135 035 22893
0168 Documentation, Owner's Manual, English . 3135 035 22883
0193 Option Code Label, LCoS 2004 . . . . . 3135 035 23211
0323 Washer, Flat, f/Light Eng. Adj. Studs (6 used). 3135 030 40171
0324 Nut, M5, f/Light Eng. Adj. Studs (3 used) 3135 030 40181
1085 Remote Transmitter, RC4308/01B 3128 147 16361
5213 Speaker, 8 ohm, 25W, Woofer (2 used). . 2422 264 00463
5214 Speaker, 8 ohm, 25W, Twetter (2 used). . 2422 264 00464
S 8190 Mainscord, USA, 7A, 2M4, VH BK 2422 070 98164
8610 Cable, DVI-D/450/DVI-D 3135 031 02121

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

First Publish: 08-11-2004
Rev. Date: 08-11-2004
Print Date: 2004-08-11

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Return to Index

Safety Notes

IMPORTANT SAFETY NOTICE
WARNING
SAFETY CHECKS
- FIRE AND SHOCK HAZARD
- IMPLOSION
- X-RADIATION
- LEAKAGE CURRENT COLD CHECK
- LEAKAGE CURRENT HOT CHECK
- PICTURE TUBE REPLACEMENT
- PARTS REPLACEMENT
TV SAFETY NOTES
SAFETY PRECAUTIONS FOR TV CIRCUITS
PRECAUTIONS DURING SERVICE
SAFETY CHECK AFTER SERVICING
PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS
PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

© Philips Electronics North America Corporation *Visit our World Wide Web Site at http://www.forceonline.com*

GENERAL SAFETY NOTES

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a ⚠ or **"S"** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

- Broken Line _____ _ _____ _ _____ _ _____

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to Your customer. Be sure to check all of the following:

FIRE AND SHOCK HAZARD
IMPLOSION
X-RADIATION
LEAKAGE CURRENT COLD CHECK
LEAKAGE CURRENT HOT CHECK
PICTURE TUBE REPLACEMENT

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.

2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.

3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.

4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.

5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.

6. Critical components having special safety characteristics are identified with an **'S'** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematic diagrams and /or exploded views.

7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.

8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.

9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

*** Broken line** ____ _ ____ _ ____ _ ____

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.

2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.

2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.

3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.

4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.

7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.

8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

LEAKAGE CURRENT COLD CHECK

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.

2. Turn on the power switch.

3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.

2. Connect a **1.5k, 1OW resistor** paralleled by a **0.15uF. capacitor** between each exposed metallic cabinet part and a **good earth ground** such as a water pipe, as shown below.

3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.

4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5milliamp. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.

5. **Repeat the above procedure with the ac plug reversed.** (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. **(Do not use an isolation transformer during this test.)** Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). **With the instrument AC switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5 milliamp. Reverse the instrument power cord plug in the outlet and repeat the test. See graphic below.**

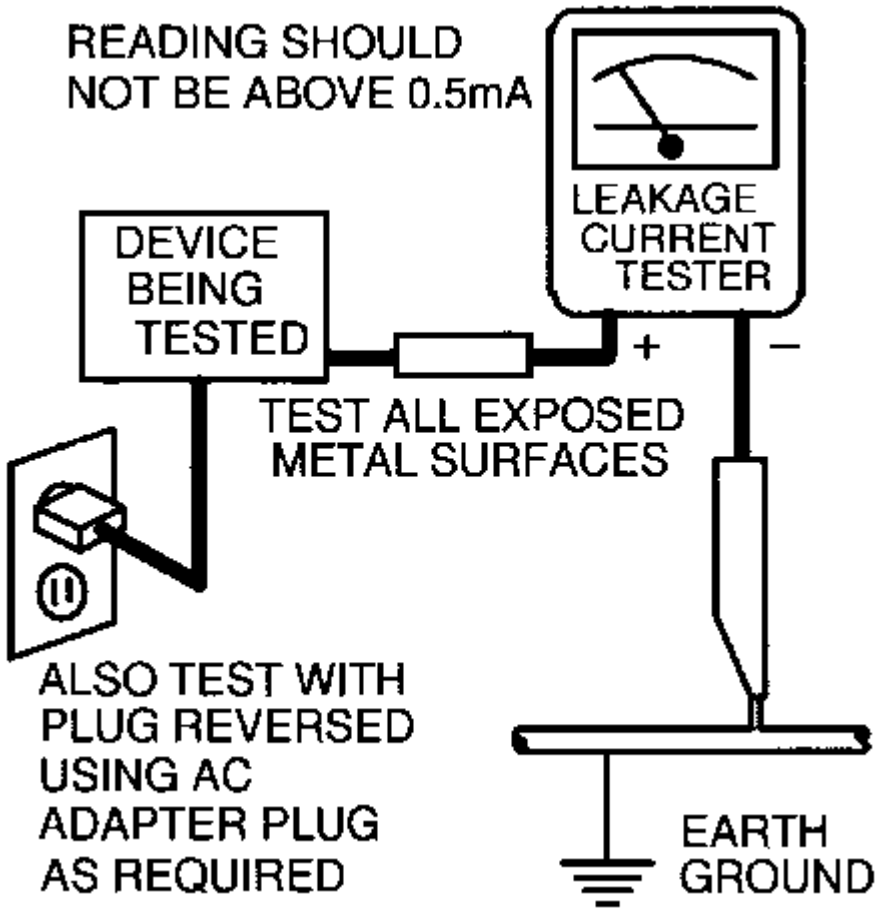

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards

TV SAFETY NOTES

SAFETY CHECKS
IMPLOSION

X-RADIATION
PICTURE TUBE REPLACEMENT
PARTS REPLACEMENT

WARNING

Before removing the CRT anode cap, turn the unit **OFF** and short the **HIGH VOLTAGE** to the **CRT DAG** ground.

SERVICE NOTE: The **CRT DAG** is not at chassis ground.

TV-VCR COMBI SAFETY NOTES

IMPORTANT SAFETY PRECAUTIONS

Prior to shipment from the factory, our products are strictly inspected for recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.

SAFETY PRECAUTIONS FOR TV CIRCUITS

1. Before returning an instrument to the customer, always make a safety check of the entire instrument, including, but not limited to, the following items:

   a. Be sure that no built-in protective devices are defective or have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including but not limited to, nonmetallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning. Servicers who defeat safety features or fail to perform safety checks may be liable for any resulting damage.

   b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, (1) spacing between the picture tube and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.

   c. Do a LEAKAGE CURRENT CHECK

   ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER OR BEFORE CONNECTING THE ANTENNA OR ACCESSORIES.

d. **X-Radiation and High Voltage Limits** - Because the picture tube is the primary potential source of X-radiation in solid-state TV receivers, it is specially constructed to prohibit X-radiation emissions. For continued X-radiation protection, the replacement picture tube must be the same type as the original. Also, because the picture tube shields and mounting hardware perform an X-radiation protection function, they must be correctly in place. High voltage must be measured each time servicing is performed that involves B+, horizontal deflection or high voltage. Correct operation of the X-radiation protection circuits also must be reconfirmed each time they are serviced. (X-radiation protection circuits also may be called "horizontal disable" or "hold down.") Read and apply the high voltage limits and, if the chassis is so equipped, the X-radiation protection circuit specifications given on instrument labels and in the **Product Safety & X-Radiation** Warning note on the service data chassis schematic. High voltage is maintained within specified limits by close tolerance safety-related components/adjustments in the high-voltage circuit. If high voltage exceeds specified limits, check each component specified on the chassis schematic and take corrective action.

2. Read and comply with all caution and safety-related notes on or inside the receiver cabinet, on the receiver chassis, or on the picture tube.

3. **Design Alteration Warning** - Do not alter or add to the mechanical or electrical design of this TV receiver. Design alterations and additions, including, but not limited to circuit modifications and the addition of items such as auxiliary audio and/or video output connections, might alter the safety characteristics of this receiver and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and may make you, the servicer, responsible for personal injury or property damage resulting therefrom.

4**. Picture Tube Implosion Protection Warning** - The picture tube in this receiver employs integral implosion protection. For continued implosion protection, replace the picture tube only with one of the same type number. Do not remove, install, or otherwise handle the picture tube in any manner without first putting on shatterproof goggles equipped with side shields. People not so equipped must be kept safely away while picture tubes are handled. Keep the picture tube away from your body. Do not handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; because of potential hazard, do not try to remove such "permanently attached" yokes from the picture tube.

5. **Hot Chassis Warning**

a. Some TV receiver chassis are electrically connected directly to one conductor of the ac power cord and may be serviced safely without an isolation transformer only if the ac power plug is inserted so that the chassis is connected to the ground side of the ac power source. To confirm that the ac power plug is inserted correctly, with an ac voltmeter, measure between the chassis and a known earth ground. If a voltage reading in excess of 1.OV is obtained, remove and reinsert the ac power plug in the opposite polarity and again measure the voltage potential between the chassis and a known earth ground.

b. Some TV receiver chassis normally have 85Vac (RMS) between chassis and earth ground regardless of the ac plug polarity. This chassis can be safety-serviced only with an isolation transformer inserted in the power line between the receiver and the ac power source, for both personnel and test equipment protection. Some TV receiver chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the ac power line. The two ground systems are electrically separated by insulation material that must not be defeated or altered.

6. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: **a.** near sharp edges, **b.** near thermally hot parts - be sure that leads and components do not touch

thermally hot parts, **c.** the ac supply, **d.** high voltage, and **e.** antenna wiring. Always inspect in all areas for pinched, out of place, or frayed wiring. Check ac power cord for damage.

7. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.

PRECAUTIONS DURING SERVICE

A. Parts identified by the ⚠ symbol are critical for safety. Replace only with part number specified.

B. In addition to safety, other parts and assemblies are specified for conformance with regulations applying to spurious radiation. These must also be replaced only with specified replacements.
Examples: RF converters, RF cables, noise blocking capacitors, and noise blocking filters, etc.

C. Use specified internal wiring. Note especially:
1) Wires covered with PVC tubing
2) Double insulated wires
3) High voltage leads

D. Use specified insulating materials for hazardous live parts. Note especially:
1) Insulation Tape
2) PVC tubing
3) Spacers
4) Insulators for transistors

E. When replacing ac primary side components (transformers, power cord, etc.), wrap ends of wires securely about the terminals before soldering.

F. Observe that the wires do not contact heat producing parts (heatsinks, oxide metal film resistors, fusible resistors, etc.)

G. Check that replaced wires do not contact sharp edged or pointed parts.

H. When a power cord has been replaced, check that 10-15 kg of force in any direction will not loosen it.

I. Also check areas surrounding repaired locations.

J. Use care that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

K**. Crimp type wire connector**
When replacing the power transformer in sets where the connections between the power cord and power transformer primary lead wires are performed using crimp type connectors, in order to prevent shock hazards, perform carefully and precisely the following steps.

Replacement procedure
1) Remove the old connector by cutting the wires at a point close to the connector. **Important:** Do not re-use a connector (discard it).

2) Strip about 15 mm of the insulation from the ends of the wires. If the wires are stranded, twist the strands to avoid frayed conductors.
3) Align the lengths of the wires to be connected. Insert the wires fully into the connector.
4) Use the crimping tool to crimp the metal sleeve at the center position. Be sure to crimp fully to the complete closure of the tool.

L. When connecting or disconnecting the VCR connectors, first, disconnect the ac plug from the ac supply socket.

SAFETY CHECK AFTER SERVICING

Examine the area surrounding the repaired location for damage or deterioration. Observe that screws, parts and wires have been returned to original positions. Afterwards, perform the following tests and confirm the specified values in order to verify compliance with safety standards.

1. **Clearance Distance**

When replacing primary circuit components, confirm specified clearance distance (d) and (d') between soldered terminals, and between terminals and surrounding metallic parts. (See graphic bllow)

Table 1 : Ratings for selected area

AC Line Voltage	Region	Clearance Distance (d) (d')
110 to 130 V	USA or CANADA	> 3.2 mm (0.126 inches)

Note: This table is unofficial and for reference only. Be sure to confirm the precise values.

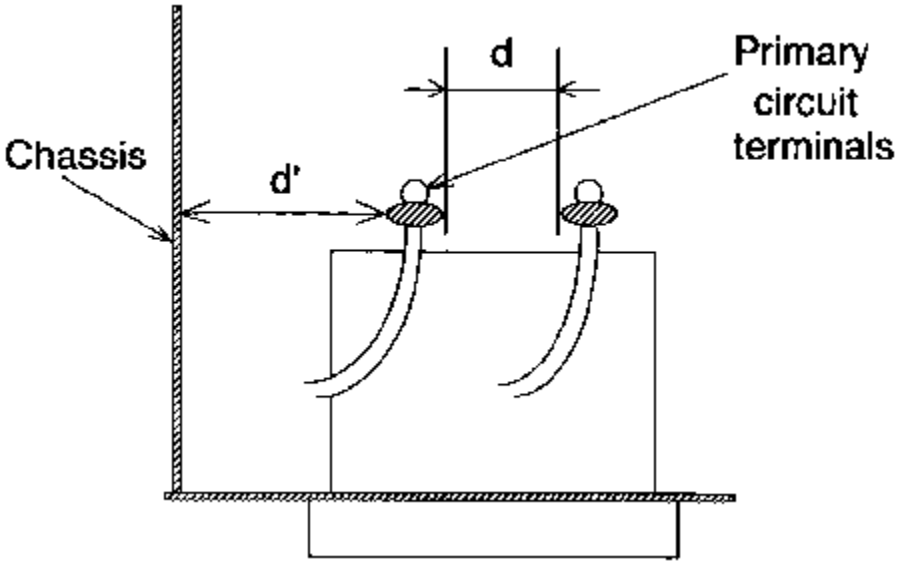

2. LEAKAGE CURRENT CHECKS

VCR SAFETY NOTES

FIRE & SHOCK HAZARD (VCR)

1. Be sure that all components are positioned in such a way to avoid possibility of shorts to adjacent components. This is especially important on those chassis which are transported to and from the repair shop.

2. Always replace all protective devices such as insulators and barriers after working on a set.

3. Check for damaged insulation on wires including the ac cord.

4. Check across-the-line components for damage and replace if necessary.

5. After re-assembly of the unit, always perform an ac leakage test on the exposed metallic parts of the cabinet such as the knobs, antenna terminals, etc. to be sure the set is safe to operate without danger of electrical shock. **Do not use a line isolation transformer during this test.** Use an ac voltmeter having 5000 ohms per volt or more sensitivity in the following manner: Connect a 1500 ohm 10 wan resistor, paralleled by 0.15 MFD ac type capacitor, between a known good earth ground (water pipe, conduit, etc.) and the exposed metallic parts, one at a time. Measure the ac voltage across the combination 1500 ohm resistor and 0.15 MFD capacitor. Reverse the ac plug on the set and repeat ac voltage measurements again for each exposed metallic part. Voltage measured must not exceed O.6 volts R.M.S. This corresponds to 0.4 milliamp ac. Any value exceeding this limit constitutes a potential shock hazard and must be corrected immediately.

GENERAL

Power Supply-This receiver is designed for operation on 120 Volts, 6OHz alternating current (ac) only. Never connect to a supply having a different frequency or voltage.

IMPORTANT NOTICE

This device employs many circuits, components, and mechanical parts designed for protection against fire, shock and RF interference. For continued safety any servicing should be performed by qualified personnel and exact replacement parts should be used. Under no circumstances should the original design be altered.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.
USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices, Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.

3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.

4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.

5. Do not use freon·propelled chemicals. These can generate electrical charges sufficient to damage ES devices.

6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).

7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION : Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:
This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.